

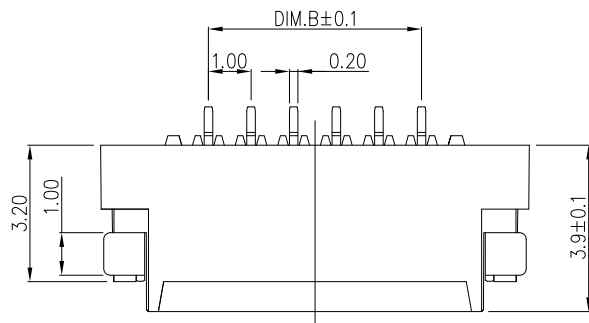





- SPEC :
- 1.Housing:High-Temp Plastic,UL94-V
Color:Black
 - 2.Locker:High-Temp Plastic,UL94-V
Color:Black
 - 3.Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
 - 4.Solder Tab:BRASS
 - 5.Temperature Rating:-25°C~+85°C
 - 6.Dielectric Withstanding Voltage:500V AC/Min

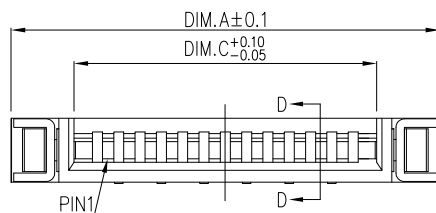

SECTION D-D

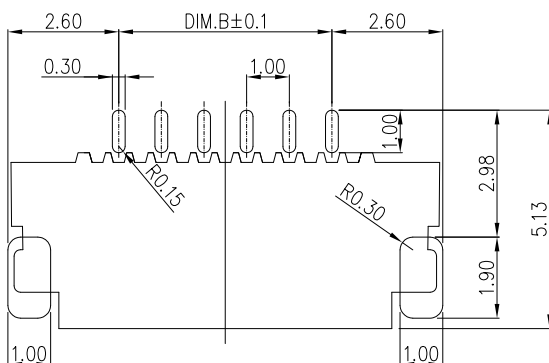

Recommended P.C.B Layout

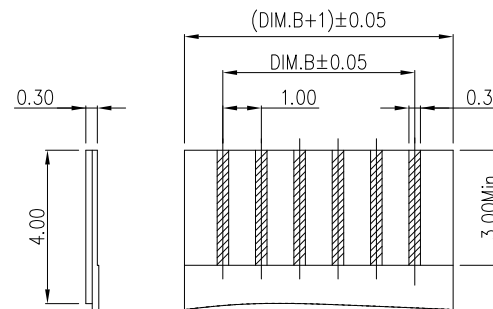

Applicable FPC

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C
	4	8.03	3.00	5.07
	5	9.03	4.00	6.07
	6	10.03	5.00	7.07
	7	11.03	6.00	8.07
	8	12.03	7.00	9.07
	9	13.03	8.00	10.07
	10	14.03	9.00	11.07
	11	15.03	10.00	12.07
	12	16.03	11.00	13.07
	13	17.03	12.00	14.07
	14	18.03	13.00	15.07
	15	19.03	14.00	16.07
	16	20.03	15.00	17.07
	17	21.03	16.00	18.07
	18	22.03	17.00	19.07
	19	23.03	18.00	20.07
	20	24.03	19.00	21.07
	21	25.03	20.00	22.07
	22	26.03	21.00	23.07
	23	27.03	22.00	24.07
	24	28.03	23.00	25.07
	25	29.03	24.00	26.07
	26	30.03	25.00	27.07
	27	31.03	26.00	28.07
	28	32.03	27.00	29.07
	29	33.03	28.00	30.07
	30	34.03	29.00	31.07

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WL2E15-xx-LF
SERIES LEADFREE
04~30 WAY
90°SMT HIGH 1.5mm
NON ZIF METAL EAR
DUAL CONTACT

DESCRIPTION: FPC 1.0PH 1.5H 無蓋有焊臥貼雙接