
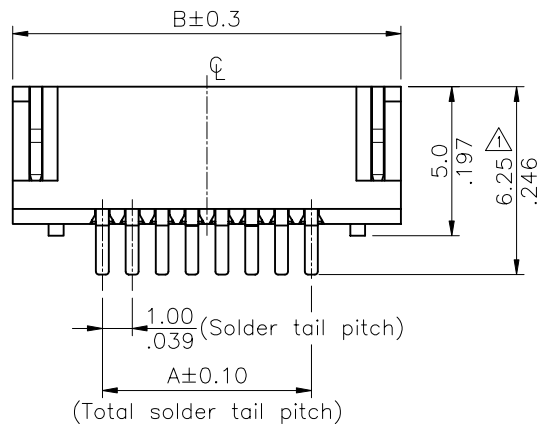


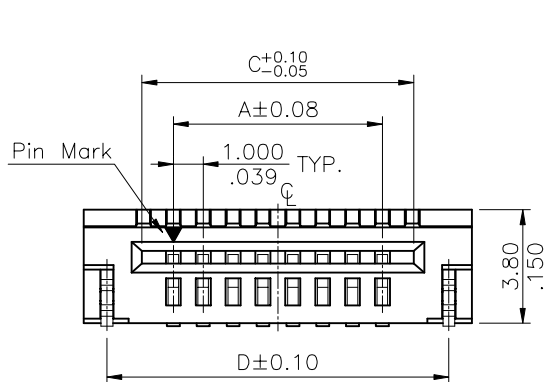




A = 1.00 \* NO. OF SPACES

B = A + 6.0

C = A + 2.1

D = A + 4.45

\* AVAILABLE IN 3 THROUGH 32  
CIRCUITS

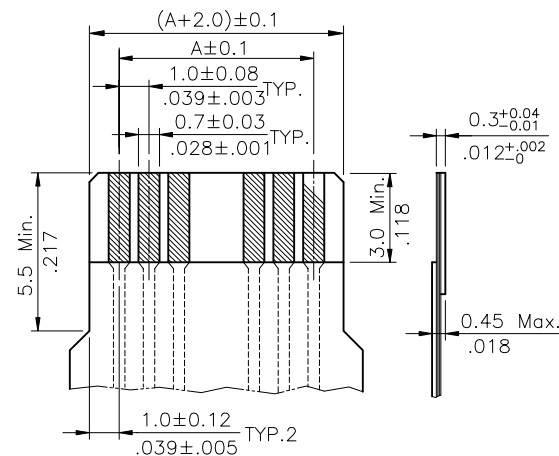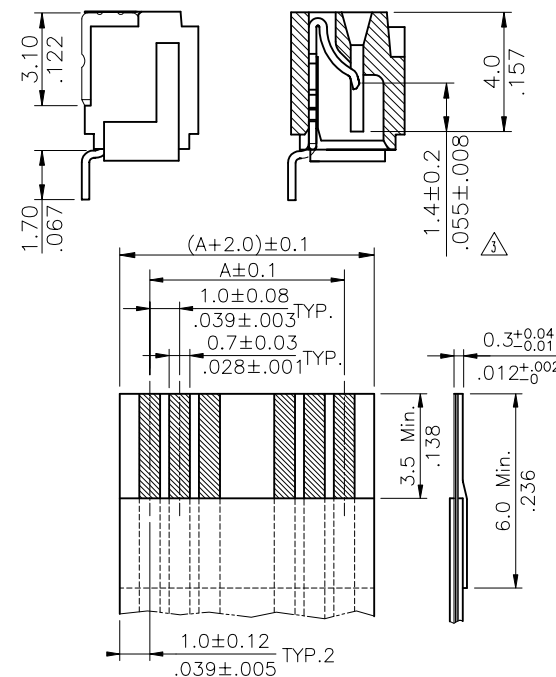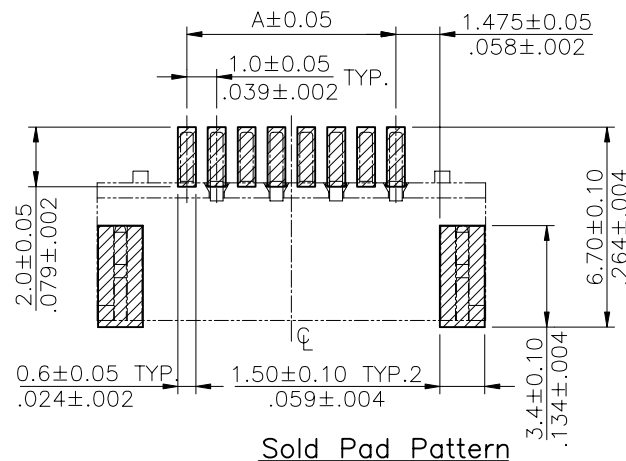

Material:

- \* Insulation:  
High Temperature Polyamide UL 94V-0  
Color Nature
- \* Contact: Phosphor Bronze

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

FPA-WLB38NR-xx-LF  
SERIES T T T T T LEADFREE  
03~32WAY  
REEL  
INNER EAR  
90°SMT HIGH 3.8mm  
NON ZIF BOTTOM/CONTACT



DESCRIPTION:

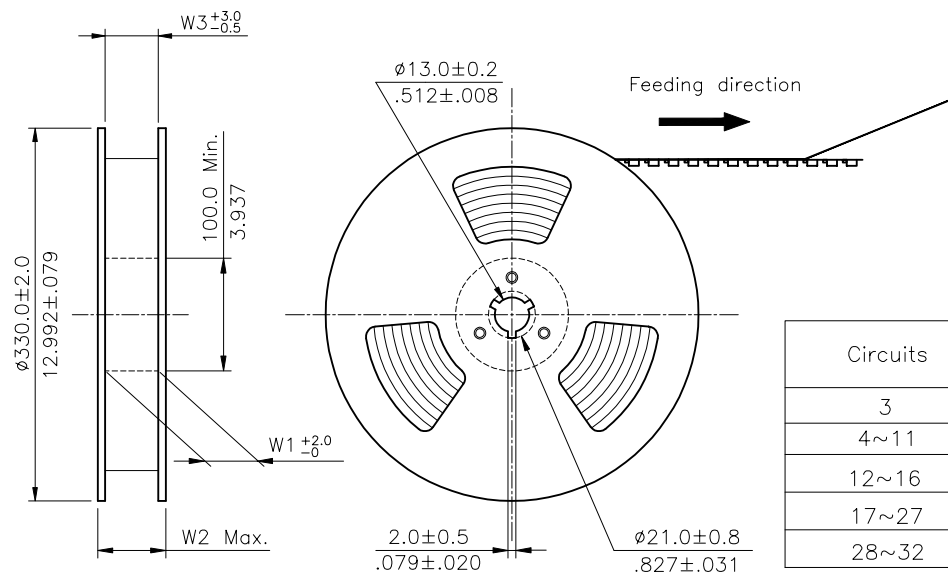

NOTE :

- \* Reel Material : Corrugated Paper
- \* Carrier Material : Clear, Conductive Polystyrene Alloy
- \* Cover Tape Material : Polyester
- \* Cover Tape Peel Strength : 0.1N – 1.3N
- \* Carrier camber is within 1mm in 250mm
- \* All dimensions meet EIA-481-B requirements.
- \* Quantity : 1200 PCS/Reel

| Circuits | Dimension   |              |             |             |             | Packing<br>(Reel/Carton) |
|----------|-------------|--------------|-------------|-------------|-------------|--------------------------|
|          | E           | F            | W1          | W2          | W3          |                          |
| 3        | 16.0(.630)  | ---          | 16.5(.650)  | 22.5(.886)  | 16.5(.650)  | 11                       |
| 4~11     | 24.0(.945)  | ---          | 24.5(.965)  | 30.5(1.201) | 24.5(.965)  | 9                        |
| 12~16    | 32.0(1.260) | 28.40(1.118) | 32.5(1.280) | 38.5(1.516) | 32.5(1.280) | 7                        |
| 17~27    | 44.0(1.732) | 40.40(1.591) | 44.5(1.752) | 50.5(1.988) | 44.5(1.752) | 5                        |
| 28~32    | 56.0(2.205) | 52.40(2.063) | 56.5(2.224) | 62.5(2.461) | 56.5(2.224) | 3                        |

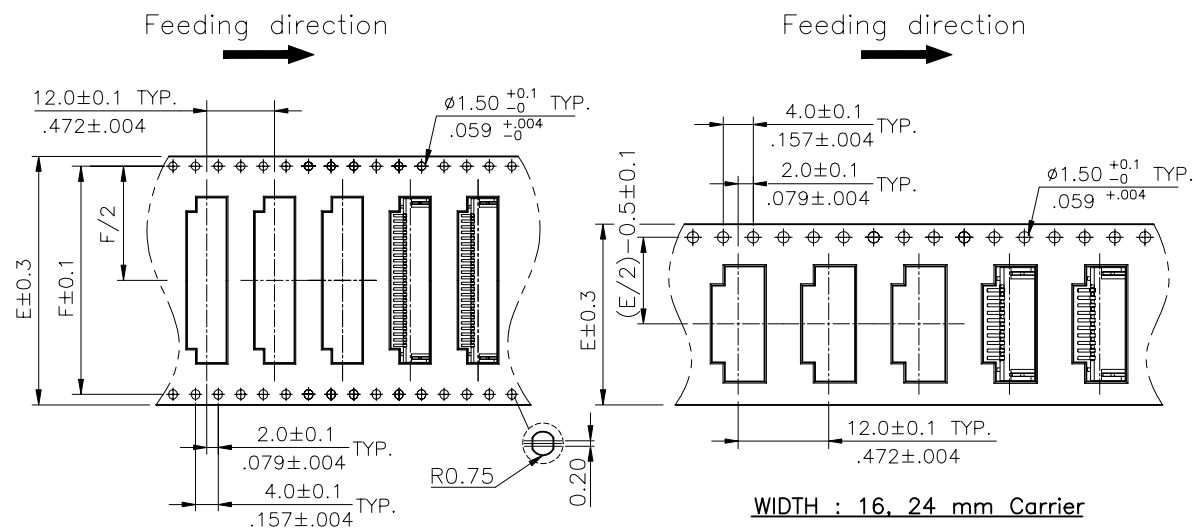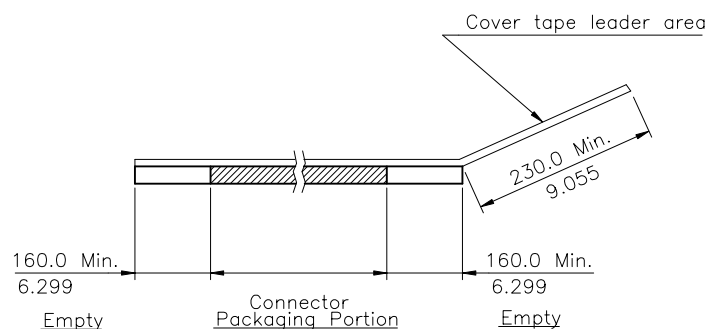

WIDTH : 32, 44 & 56 mm Carrier

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WLB38NR-xx-LF  
SERIES | | | | LEADFREE  
| | | | 03~32WAY  
| | | | REEL  
| | | | INNER EAR  
90°SMT | | | | HIGH 3.8mm  
NON ZIF | | | | BOTTOM/CONTACT

DESCRIPTION: