



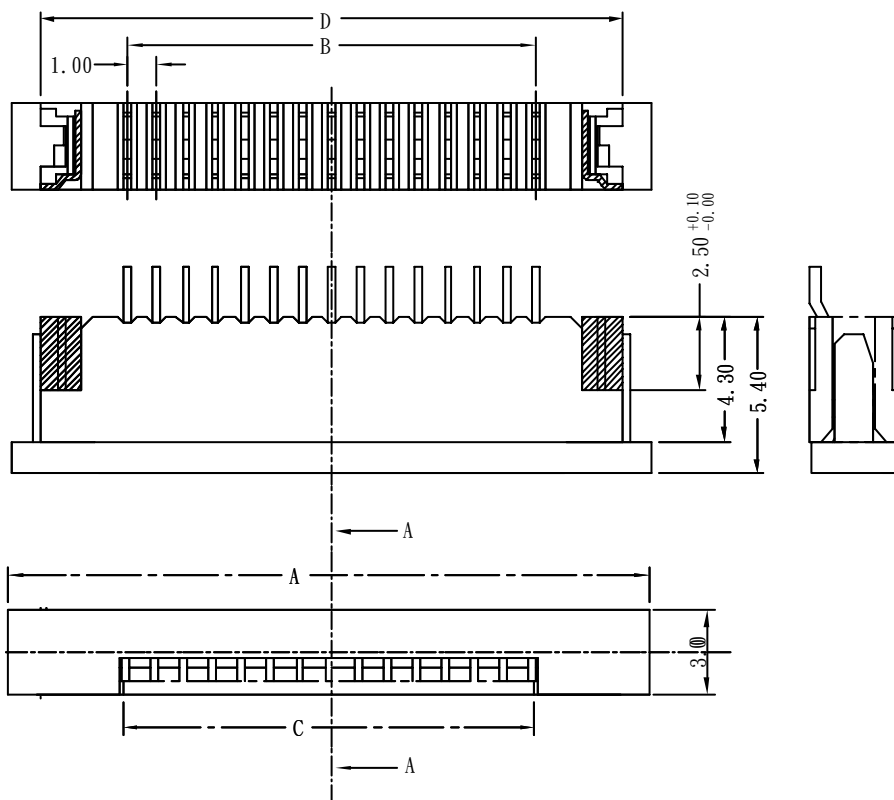


NOTES:


- ① LENGTH TO CONTACT POINT.
- MATERIALS: HOUSING: HIGH THERMOPLASTIC, UL94V-0
ACTUATOR: HIGH THERMOPLASTIC, UL94V-0
TERMINAL: COPPER ALLOY (t=0.25)
FITTING NAIL: COPPER ALLOY (t=0.25)
- FITTING NAIL FOR PREVENTION OF PEEL-OFF
FROM P.C.B. PATTERN.
- IN THE PACKAGE ACTUATOR SHOULD BE LOCKED.

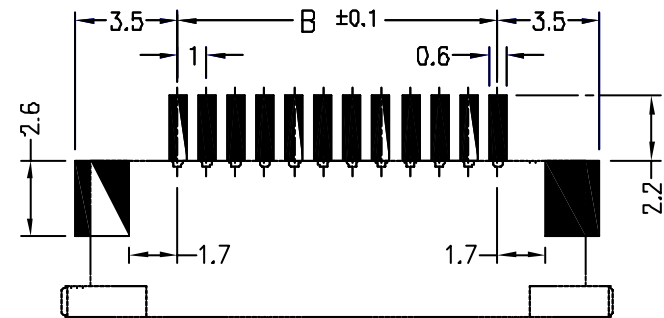

RECOMMENDED PATTERN DIM. (REF.)

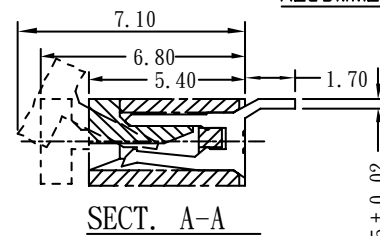

SECT. A-A

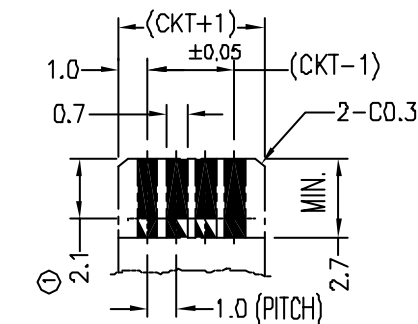

RECOMMENDED APPLICABLE FPC LAYOUT

DIMENSIONS(mm)

CKT.	A	B	C	D	CKT.	A	B	C	D
03	10.0	2.0	4.15	8.0	19	26.0	18.0	20.15	24.0
04	11.0	3.0	5.15	9.0	20	27.0	19.0	21.15	25.0
05	12.0	4.0	6.15	10.0	21	28.0	20.0	22.15	26.0
06	13.0	5.0	7.15	11.0	22	29.0	21.0	23.15	27.0
07	14.0	6.0	8.15	12.0	23	30.0	22.0	24.15	28.0
08	15.0	7.0	9.15	13.0	24	31.0	23.0	25.15	29.0
09	16.0	8.0	10.15	14.0	25	32.0	24.0	26.15	30.0
10	17.0	9.0	11.15	15.0	26	33.0	25.0	27.15	31.0
11	18.0	10.0	12.15	16.0	27	34.0	26.0	28.15	32.0
12	19.0	11.0	13.15	17.0	28	35.0	27.0	29.15	33.0
13	20.0	12.0	14.15	18.0	29	36.0	28.0	30.15	34.0
14	21.0	13.0	15.15	19.0	30	37.0	29.0	31.15	35.0
15	22.0	14.0	16.15	20.0					
18	23.0	15.0	17.15	21.0					
17	24.0	16.0	18.15	22.0					
18	25.0	17.0	19.15	23.0					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-WZA3021-xx-LF
SERIES T LEADFREE
04-32WAY
2.1mm
HIGH 3.0mm
UPPER CONTACT
90°SMT
ZIF

DESCRIPTION: FFC/FPC Connector ZIF Right Angle Upper Contact Type (Pitch 1.0 mm)