


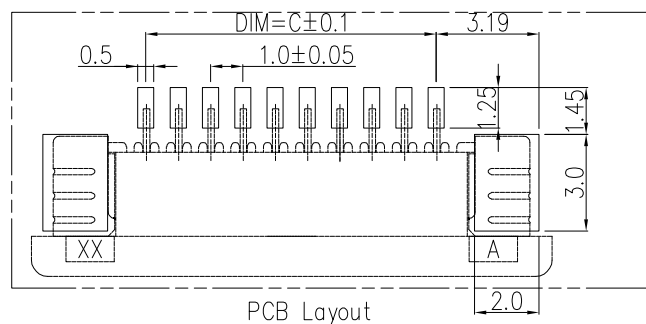
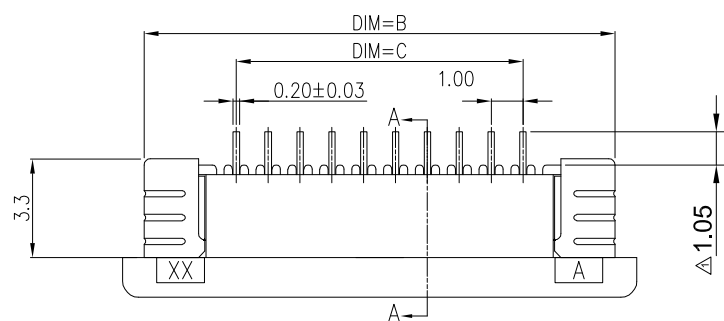





PCB Layout



SECTION A-A



SPEC :

1. Housing: Hight-Temp Plastic,UL94-V
Color:Nature(Lvory)(LCP)
2. Locker: Hight-Temp Plastic,UL94-V
Color:Black(LCP)
3. Contact:Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 0.5A DC
7. Operating Temperature Range : -45°C ~ +85°C

No. of contacts	Dimensions					No. of contacts	Dimensions				
	A	B	C	D	E		A	B	C	D	E
4	10.10	9.10	3.00	5.10	5.20	17	23.10	22.10	16.00	18.10	5.65
5	11.10	10.10	4.00	6.10		18	24.10	23.10	17.00	19.10	
6	12.10	11.10	5.00	7.10		19	25.10	24.10	18.00	20.10	
7	13.10	12.10	6.00	8.10		20	26.10	25.10	19.00	21.10	
8	14.10	13.10	7.00	9.10		21	27.10	26.10	20.00	22.10	
9	15.10	14.10	8.00	10.10		22	28.10	27.10	21.00	23.10	
10	16.10	15.10	9.00	11.10		23	29.10	28.10	22.00	24.10	
11	17.10	16.10	10.00	12.10		24	30.10	29.10	23.00	25.10	
12	18.10	17.10	11.00	13.10		25	31.10	30.10	24.00	26.10	
13	19.10	18.10	12.00	14.10		26	32.10	31.10	25.00	27.10	
14	20.10	19.10	13.00	15.10		27	33.10	32.10	26.00	28.10	
15	21.10	20.10	14.00	16.10		28	34.10	33.10	27.00	29.10	
16	22.10	21.10	15.00	17.10		29	35.10	34.10	28.00	30.10	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WZB202-xx-LF
SERIES
LEADFREE
04~29WAY
HIGH 2.0mm
BOTTOM CONTACT
ZIF
90°SMT

DESCRIPTION: 1.0PH 2.0H 抽屜臥貼下接