



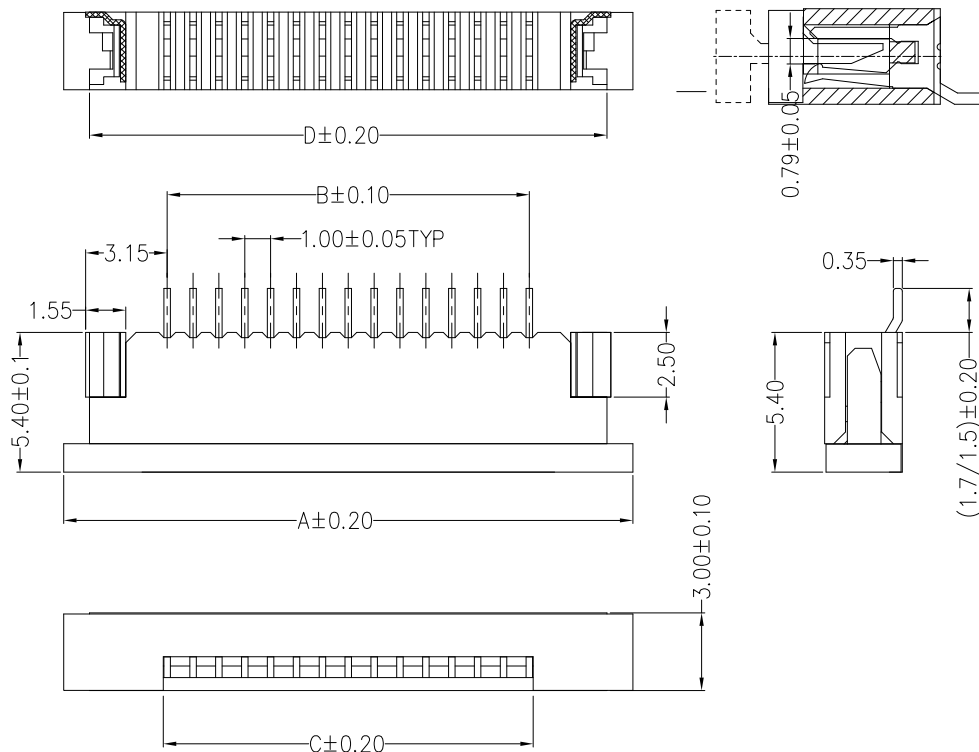


SPEC :

1. Housing: Hight-Temp Plastic,UL94-V
Color: Nature(Lvory)(LCP)
2. Locker: Hight-Temp Plastic,UL94-V
Color: Black(LCP)
3. Contact: Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)

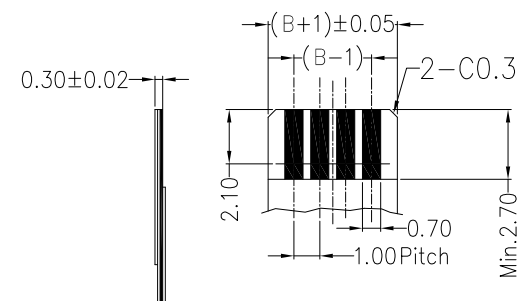

PROPER CABLE

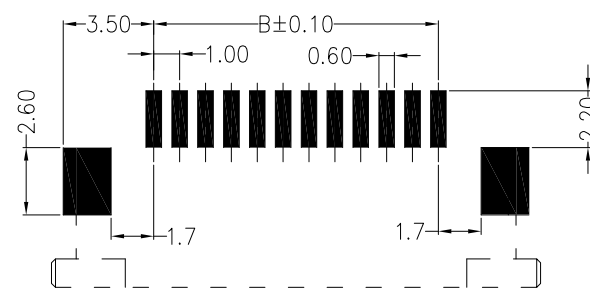

P.C.BOARD LAYOUT

POS.	A	B	C	D	POS.	A	B	C	D	POS.	A	B	C	D
04	11.0	3.0	5.15	9.0	13	20.0	12.0	14.15	18.0	22	29.0	21.0	23.15	27.0
05	12.0	4.0	6.15	10.0	14	21.0	13.0	15.15	19.0	23	30.0	22.0	24.15	28.0
06	13.0	5.0	7.15	11.0	15	22.0	14.0	16.15	20.0	24	31.0	23.0	25.15	29.0
07	14.0	6.0	8.15	12.0	16	23.0	15.0	17.15	21.0	25	32.0	24.0	26.15	30.0
08	15.0	7.0	9.15	13.0	17	24.0	16.0	18.15	22.0	26	33.0	25.0	27.15	31.0
09	16.0	8.0	10.15	14.0	18	25.0	17.0	19.15	23.0	27	34.0	26.0	28.15	32.0
10	17.0	9.0	11.15	15.0	19	26.0	18.0	20.15	24.0	28	35.0	27.0	29.15	33.0
11	18.0	10.0	12.15	16.0	20	27.0	19.0	21.15	25.0	29	36.0	28.0	30.15	34.0
12	19.0	11.0	13.15	17.0	21	28.0	20.0	22.15	26.0	30	37.0	29.0	31.15	35.0

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-WZB3021-xx-LF

SERIES
LEADFREE
04~30WAY
2.1mm
HIGH 3.0mm
90°SMT
ZIF
BOTTOM CONTACT

DESCRIPTION: 1.0PH 3.0H 抽屜臥貼下接