
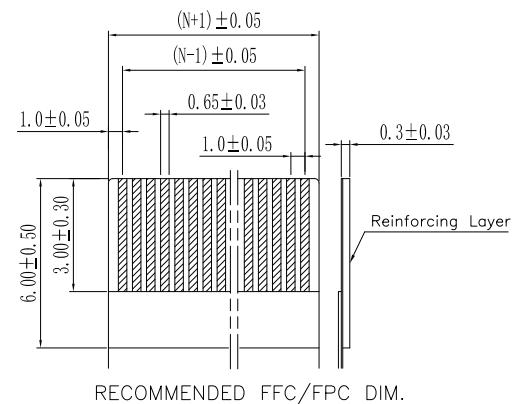
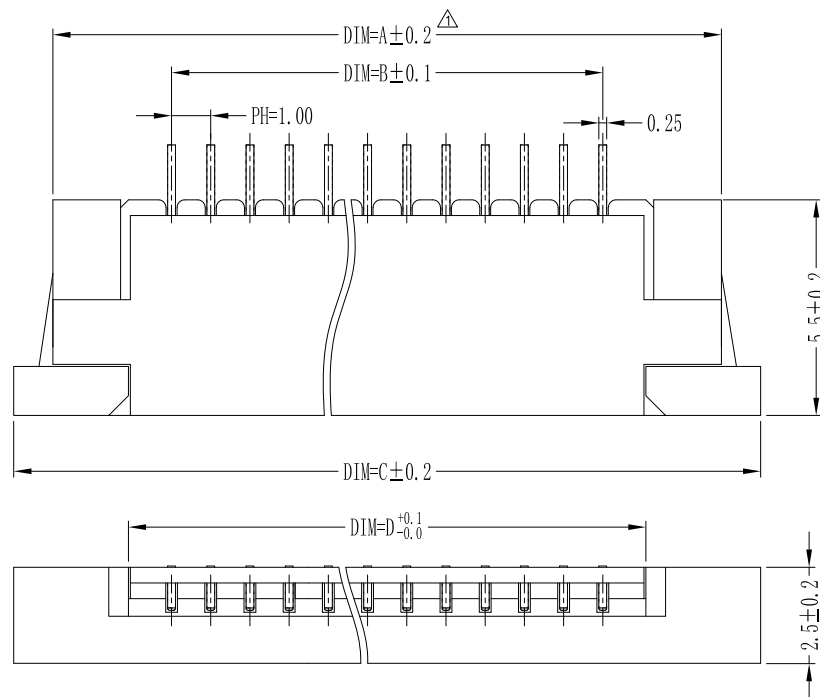
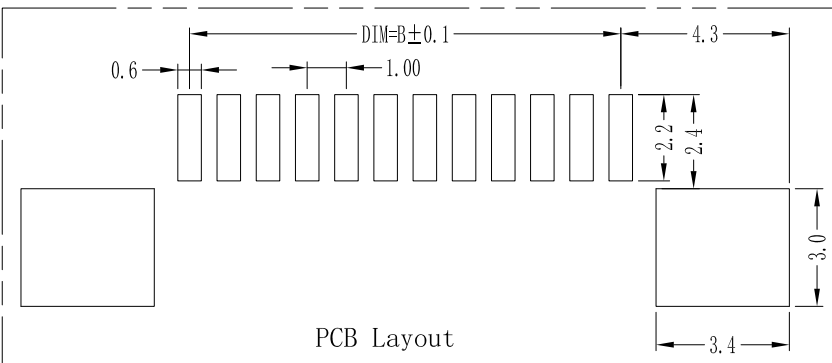


上接触

A: UPPER CONTACT



下接触

B: BOTTOM CONTACT

性能:
额定电流: 0.5A
额定电压: 50V
耐电压: 500V
接触电阻: $\leq 20m\Omega$
绝缘电阻: 800M Ω
工作温度: -20℃~+85℃

塑件 (材质): LCP, UL94V-0
锁扣 (材质): LCP, UL94V-0
插簧 (材质): 磷青铜, 镀锡/镀金
焊片 (材质): 磷青铜, 镀锡/镀金

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.1	29.0	37.0	31.1
29P	34.1	28.0	36.0	30.1
28P	33.1	27.0	35.0	29.1
27P	32.1	26.0	34.0	28.1
26P	31.1	25.0	33.0	27.1
25P	30.1	24.0	32.0	26.1
24P	29.1	23.0	31.0	25.1
23P	28.1	22.0	30.0	24.1
22P	27.1	21.0	29.0	23.1
21P	26.1	20.0	28.0	22.1
20P	25.1	19.0	27.0	21.1
19P	24.1	18.0	26.0	20.1
18P	23.1	17.0	25.0	19.1
17P	22.1	16.0	24.0	18.1
16P	21.1	15.0	23.0	17.1
15P	20.1	14.0	22.0	16.1
14P	19.1	13.0	21.0	15.1
13P	18.1	12.0	20.0	14.1
12P	17.1	11.0	19.0	13.1
11P	16.1	10.0	18.0	12.1
10P	15.1	9.0	17.0	11.1
9P	14.1	8.0	16.0	10.1
8P	13.1	7.0	15.0	9.1
7P	12.1	6.0	14.0	8.1
6P	11.1	5.0	13.0	7.1
5P	10.1	4.0	12.0	6.1
4P	9.1	3.0	11.0	5.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$





PPOJECTION

照片框


ORDER INFORMATION

FPA-WZx25R-xx-LF
SERIES
90°SMT
ZIF A: UPPER CONTACT
B: BOTTOM CONTACT
LEADFREE
04~30 WAY
HIGH 2.5mm
REEL


DESCRIPTION: FPC 1.0 K型 抽屜上/下接

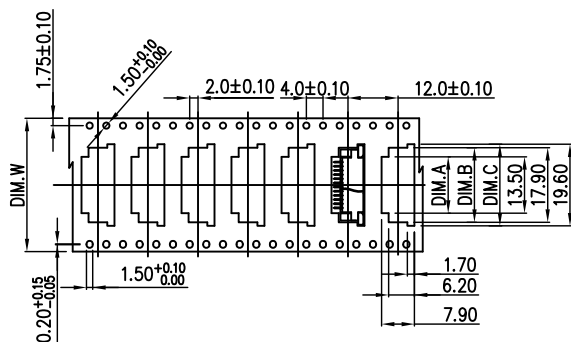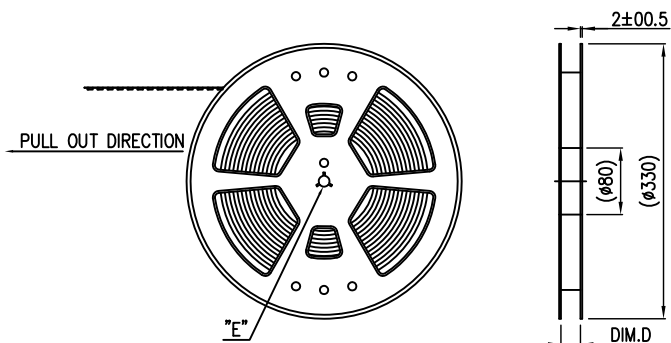

- NOTES:
- 1.Number of Connectors:1000 Pcs/Reel
 - 2.Material
Carrier Tape:PET,PE,PEF
Reel:PS
 - 3.Lead Tape Length:

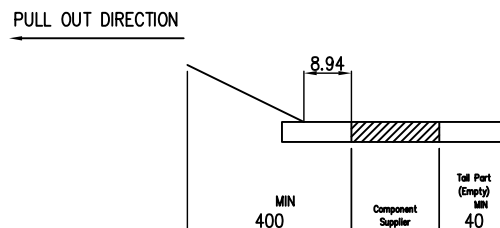

- 4.Peeling off force of top tape
0.3N ~ 1.1N
(Peeling direction as shown in following fig)

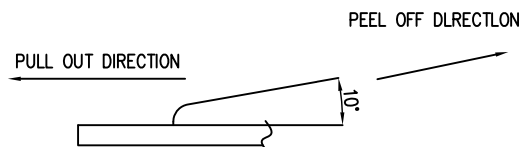

PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.W	單邊/雙邊孔
4	4.80	9.90	11.60	25.50	24.50	單邊孔
5	5.80	10.90	12.60	25.50	24.50	單邊孔
6	6.80	11.90	13.60	25.50	24.50	單邊孔
7	7.80	12.90	14.60	25.50	24.50	單邊孔
8	8.80	13.90	15.60	25.50	24.50	單邊孔
9	9.80	14.90	16.60	25.50	24.50	單邊孔
10	10.80	15.90	17.60	25.50	24.50	單邊孔
11	11.80	16.90	18.60	33.50	32.00	雙邊孔
12	12.80	17.90	19.60	33.50	32.00	雙邊孔
13	13.80	18.90	20.60	33.50	32.00	雙邊孔
14	14.80	19.90	21.60	33.50	32.00	雙邊孔
15	15.80	20.90	22.60	45.50	44.00	雙邊孔
16	16.80	21.90	23.60	45.50	44.00	雙邊孔
17	17.80	22.90	24.60	45.50	44.00	雙邊孔
18	18.80	23.90	25.60	45.50	44.00	雙邊孔
19	19.80	24.90	26.60	45.50	44.00	雙邊孔
20	20.80	25.90	27.60	45.50	44.00	雙邊孔
21	21.80	26.90	28.60	45.50	44.00	雙邊孔
22	22.80	27.90	29.60	45.50	44.00	雙邊孔
23	23.80	28.90	30.60	45.50	44.00	雙邊孔
24	24.80	29.90	31.60	45.50	44.00	雙邊孔
25	25.80	30.90	32.60	45.50	44.00	雙邊孔
26	26.80	31.90	33.60	57.50	56.00	雙邊孔
27	27.80	32.90	34.60	57.50	56.00	雙邊孔
28	28.80	33.90	35.60	57.50	56.00	雙邊孔
29	29.80	34.90	36.60	57.50	56.00	雙邊孔
30	30.80	35.90	37.60	57.50	56.00	雙邊孔
31	31.80	36.90	38.60	57.50	56.00	雙邊孔
32	32.80	37.90	39.60	57.50	56.00	雙邊孔

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

FPA-WZx25R-xx-LF
SERIES REEL LEADFREE
90°SMT HIGH 2.5mm
ZIF A: UPPER CONTACT
B: BOTTOM CONTACT

DESCRIPTION: FPC 1.0PH 2.5H 抽屜式上下接 包裝圖

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION