

NOTES:

1.HOUSING MATERIAL: HEAT RESISTANT PLASTIC PA6T UL94 V-0.
ACTUATOR MATERIAL: HEAT RESISTANT PLASTIC PPS UL94 V-0.



2.TERMINAL MATERIAL: Phosphor Bronze

80"~120u" Tin Over& 50u"~100u" Nickel Under Plated. (Lead Free)

3.FITTING NAIL MATERIAL: Brass


80"~120u" Tin Over& 50u"~100u" Nickel Under Plated. (Lead Free)

No. of Contacts	DIM. A	DIM. B	DIM. C	DIM. D
04	3.00	5.10	10.40	11.10
05	4.00	6.10	11.40	12.10
06	5.00	7.10	12.40	13.10
07	6.00	8.10	13.40	14.10
08	7.00	9.10	14.40	15.10
09	8.00	10.10	15.40	16.10
10	9.00	11.10	16.40	17.10
11	10.00	12.10	17.40	18.10
12	11.00	13.10	18.40	19.10
13	12.00	14.10	19.40	20.10
14	13.00	15.10	20.40	21.10
15	14.00	16.10	21.40	22.10
16	15.00	17.10	22.40	23.10
17	16.00	18.10	23.40	24.10
18	17.00	19.10	24.40	25.10
19	18.00	20.10	25.40	26.10
20	19.00	21.10	26.40	27.10
21	20.00	22.10	27.40	28.10
22	21.00	23.10	28.40	29.10
23	22.00	24.10	29.40	30.10
24	23.00	25.10	30.40	31.10
25	24.00	26.10	31.40	32.10
26	25.00	27.10	32.40	33.10
27	26.00	28.10	33.40	34.10
28	27.00	29.10	34.40	35.10
29	28.00	30.10	35.40	36.10
30	29.00	31.10	36.40	37.10
31	30.00	32.10	37.40	38.10
32	31.00	33.10	38.40	39.10
33	32.00	34.10	39.40	40.10
34	33.00	35.10	40.40	41.10
35	34.00	36.10	41.40	42.10
36	35.00	37.10	42.40	43.10
37	36.00	38.10	43.40	44.10
38	37.00	39.10	44.40	45.10
39	38.00	40.10	45.40	46.10
40	39.00	41.10	46.40	47.10

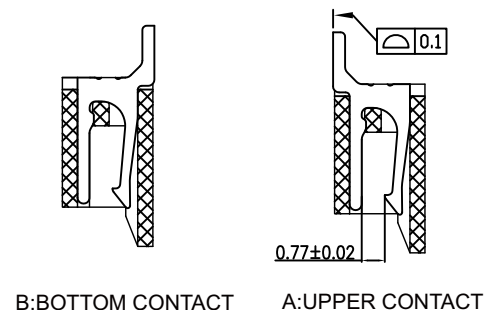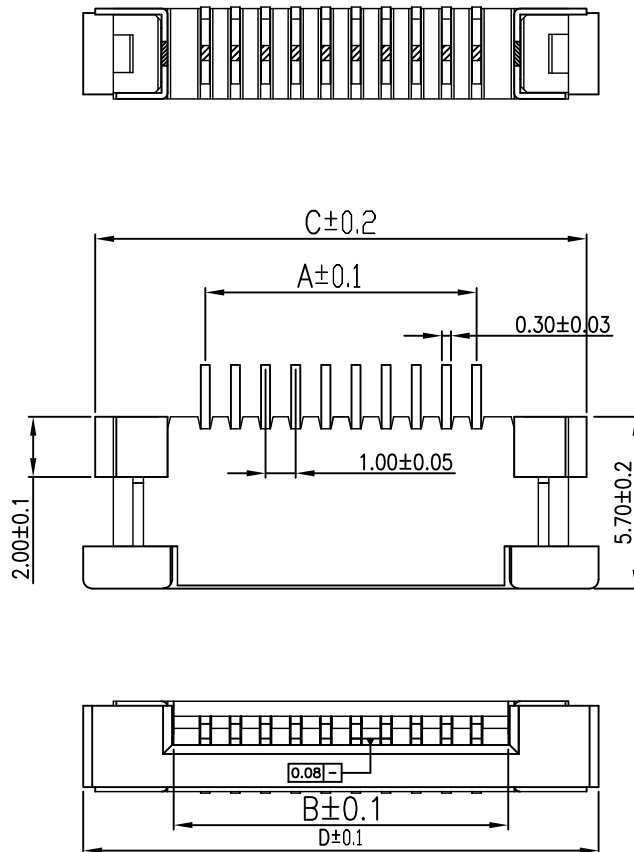

B: BOTTOM CONTACT

A: UPPER CONTACT

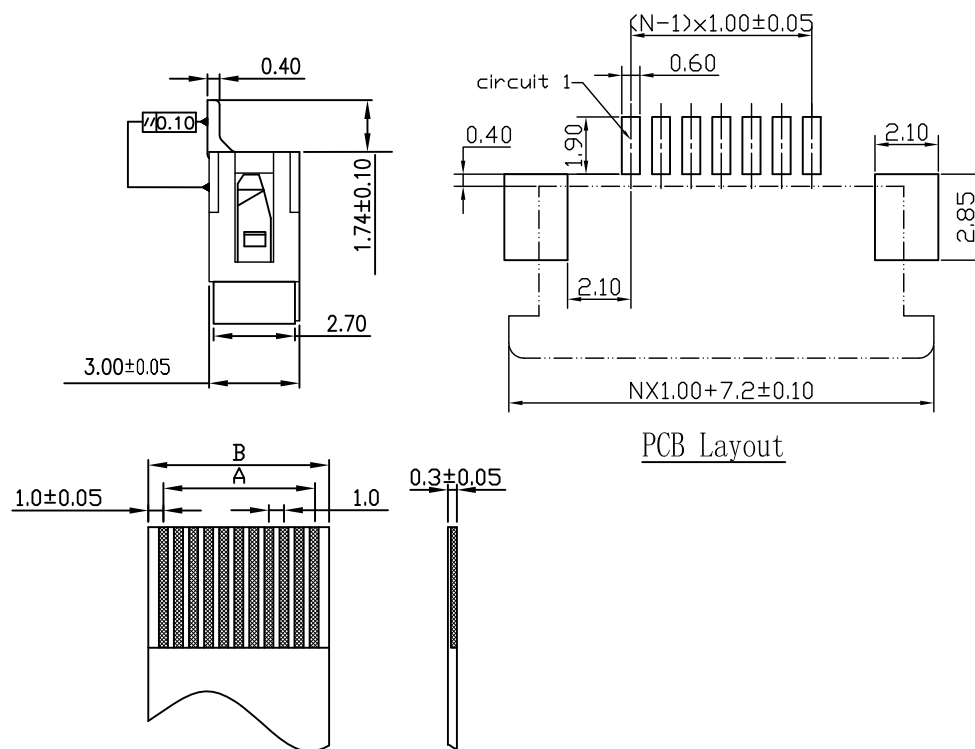

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ± 0.01
ANG ±

照片框

ORDER INFORMATION

FPA-WZx3021-xx-LF
SERIES | | | LEADFREE
90°SMT | | | HIGH 3.0mm
ZIF A: UPPER CONTACT
B: BOTTOM CONTACT

DESCRIPTION: FFC/FPC Connector ZIF Right Angle Contact Type 1.0 mm H=3.0mm