

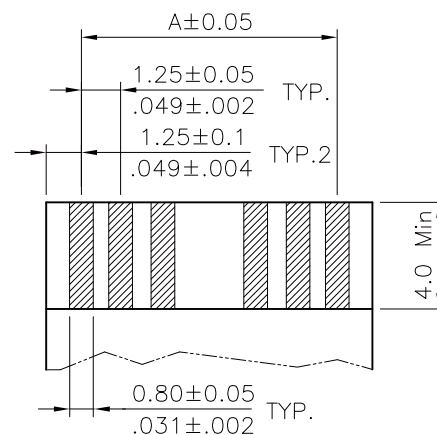


Material:

- * Insulation: Glass filled polyester UL 94V-0
- * Contact: Phosphor Bronze

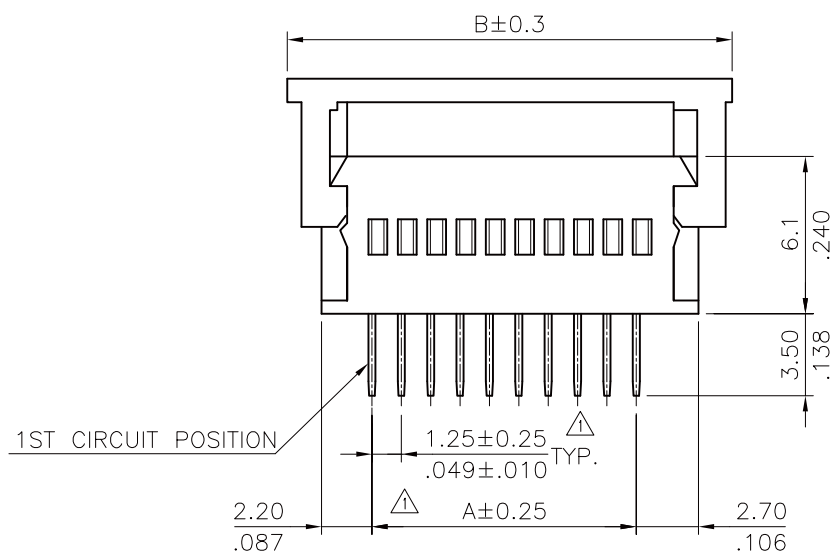

Accommodated FPC/FFC
(Thickness: 0.3mm±0.05)

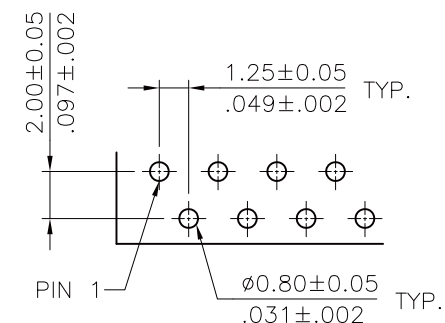

Recommended P.C. Board Layout

A = 1.25 * No. of Spaces

B = A + 7.05

C = A + 2.7

△ * Available in 3 through 31 circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

FPB-DZAR-xx-LF

SERIES

LEADFREE

03-31WAY

R TYPE FOOT POSITION

SINGLE CONTACT

ZIF

DIP 180°

DESCRIPTION: