


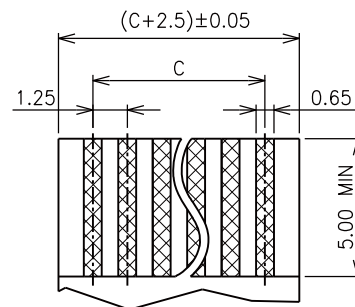
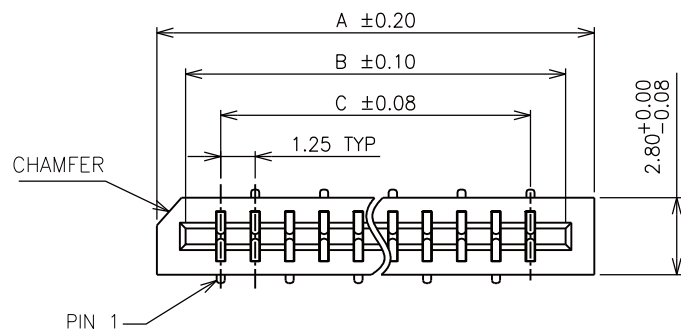
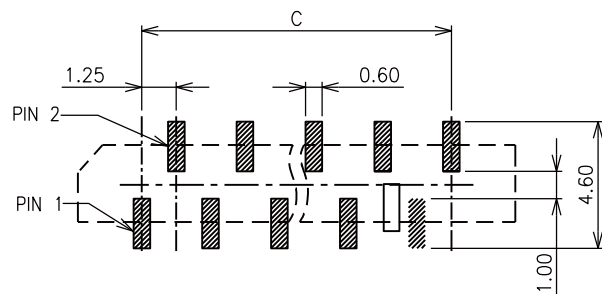




FPC/FFC T=0.30±0.05

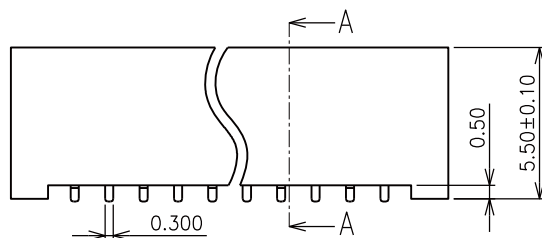

RECOMMENDED PCB LAYOUT

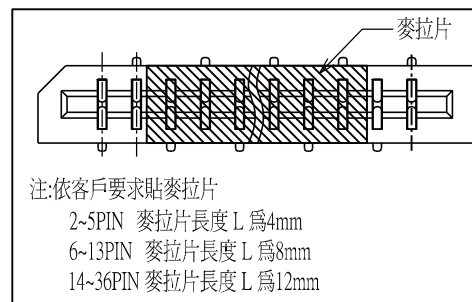

NOTE:

■ MATERIAL

HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.
CONTACT: COPPER ALLOY.
PLATING: TIN PLATED OVER NICKEL.

■ ELECTRICAL

CURRENT RATING: 1.0AMP.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
INSULATION RESISTANCE: 500MΩ MIN.
CONTACT RESISTANCE: 30mΩ MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C TO 85°C.

■ DIMENSION TABLE

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
2	5.90	3.80	1.25	20	28.40	26.30	23.75
3	7.15	5.05	2.50	21	29.65	27.55	25.00
4	8.40	6.30	3.75	22	30.90	28.80	26.25
5	9.65	7.55	5.00	23	32.15	30.05	27.50
6	10.90	8.80	6.25	24	33.40	31.30	28.75
7	12.15	10.05	7.50	25	34.65	32.55	30.00
8	13.40	11.30	8.75	26	35.90	33.80	31.25
9	14.65	12.55	10.00	27	37.15	35.05	32.50
10	15.90	13.80	11.25	28	38.40	36.30	33.75
11	17.15	15.05	12.50	29	39.65	37.55	35.00
12	18.40	16.30	13.75	30	40.90	38.80	36.25
13	19.65	17.55	15.00	31	42.15	40.05	37.50
14	20.90	18.80	16.25	32	43.40	41.30	38.75
15	22.15	20.05	17.50	33	44.65	42.55	40.00
16	23.40	21.30	18.75	34	45.90	43.80	41.25
17	24.65	22.55	20.00	35	47.15	45.05	42.50
18	25.90	23.80	21.25	36	48.40	46.30	43.75
19	27.15	25.05	22.50				

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPB-VL2L56CR-xx-LF

SERIES LEADFREE

02~36WAY






180°SMT REEL

NON ZIF MYLAR

DUAL CONTACT HIGH 5.6mm

L TYPE FOOT

DESCRIPTION: FPC/FFC 1.25 PITCH NON ZIF TOP ENTRY DUAL CONTACT
SMT TYPE - SPECIAL PCB LAYOUT

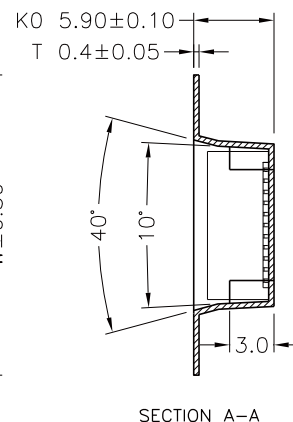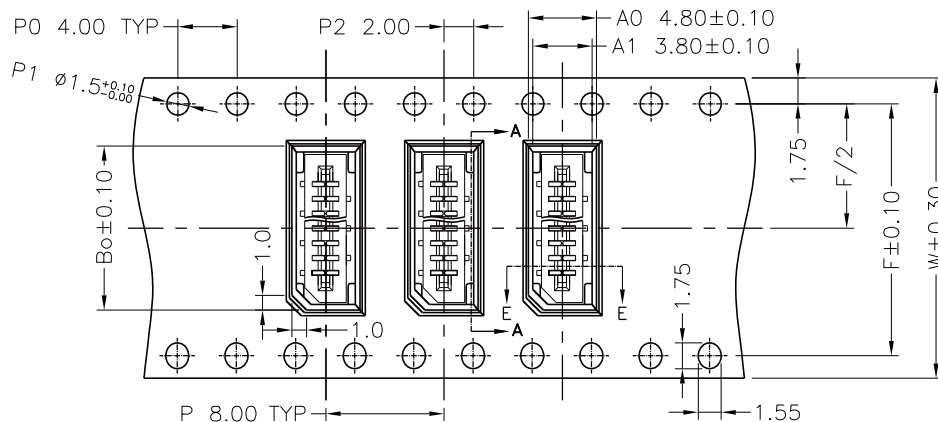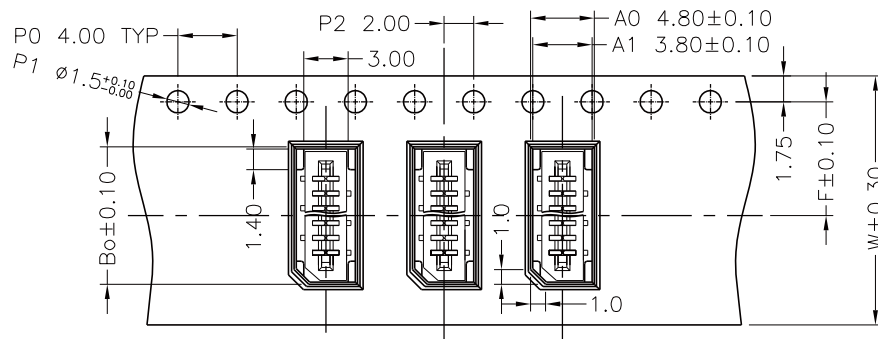


NOTE:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. A measured on a plane 0.3mm above the bottom of the pocket.
3. Material: Transparent Conductive Polystyrene.
4. Thickness: 0.40 ± 0.05 mm.
5. Packing length per 22" reel: 8.60 Meters.
6. Component loader 13" reel: 1000 pcs.
7. For tape width (dimension W) 16mm, 24mm a pilot hole is provided on one side
For tape width (dimension W) 32mm and 44mm, 56mm, 72mm pilot holes are provided on both side.
8. The top tape all of pull about 0.1N to 1.3N (10g to 130g).

DIMENSION TABLE

NO. OF POS	ITEM			NO. OF POS	ITEM		
	Bo	W	F		Bo	W	F
2	6.20	16	7.50	20	28.70	44	40.4
3	7.45	24	11.5	21	29.95	44	40.4
4	8.70	24	11.5	22	31.20	44	40.4
5	9.95	24	11.5	23	32.45	56	52.4
6	11.20	24	11.5	24	33.70	56	52.4
7	12.45	24	11.5	25	34.95	56	52.4
8	13.70	24	11.5	26	36.20	56	52.4
9	14.95	24	11.5	27	37.45	56	52.4
10	16.20	32	28.4	28	38.70	56	52.4
11	17.45	32	28.4	29	39.95	56	52.4
12	18.70	32	28.4	30	41.20	56	52.4
13	19.95	44	40.4	31	42.45	56	52.4
14	21.20	44	40.4	32	43.70	72	68.4
15	22.45	44	40.4	33	44.95	72	68.4
16	23.70	44	40.4	34	46.20	72	68.4
17	24.95	44	40.4	35	47.45	72	68.4
18	26.20	44	40.4	36	48.70	72	68.4
19	27.45	44	40.4				

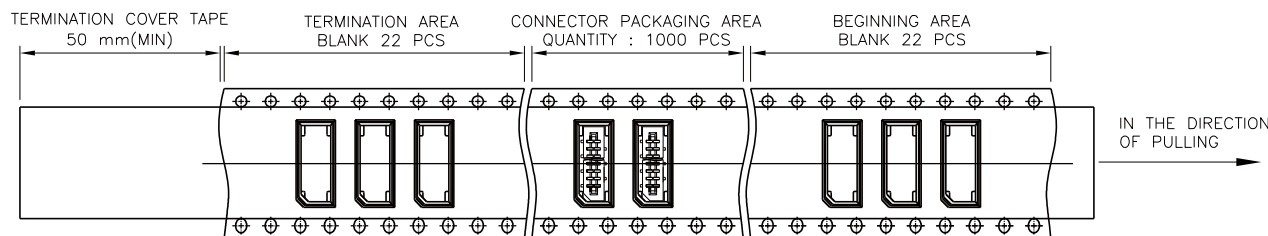

COMPOSITION OF PACKAGING

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X ± 0.30

.X ± 0.20

.XX ± 0.15

.XXX ± 0.08

ANG $\pm$

P PROJECTION

照片框

ORDER INFORMATION

FPB-VL2L56CR-xx-LF

SERIES LEADFREE

180°SMT REEL 02-36WAY

NON ZIF MYLAR



DUAL CONTACT HIGH 5.6mm

L TYPE FOOT

DESCRIPTION: FPC 1.25mm 雙面接觸 SMT180° 卷裝作業圖

■ NOTE:

1. REEL MATERIAL: PS
2. CARRIER MATERIAL: PS
3. COVERTAPE MATERIAL:PS
4. COVER TAPE REEL STRENGTH:13"
5. QUANTITY:1000pcs/REEL
DETAIL QUANTIT:SEE TABLE
6. 外箱內腔尺寸：340*340*290mm
7. 箱內所有卷盤須用一個防水袋密封好；
8. 裝箱後，如有上下間隙需用緩沖物填滿再封箱。

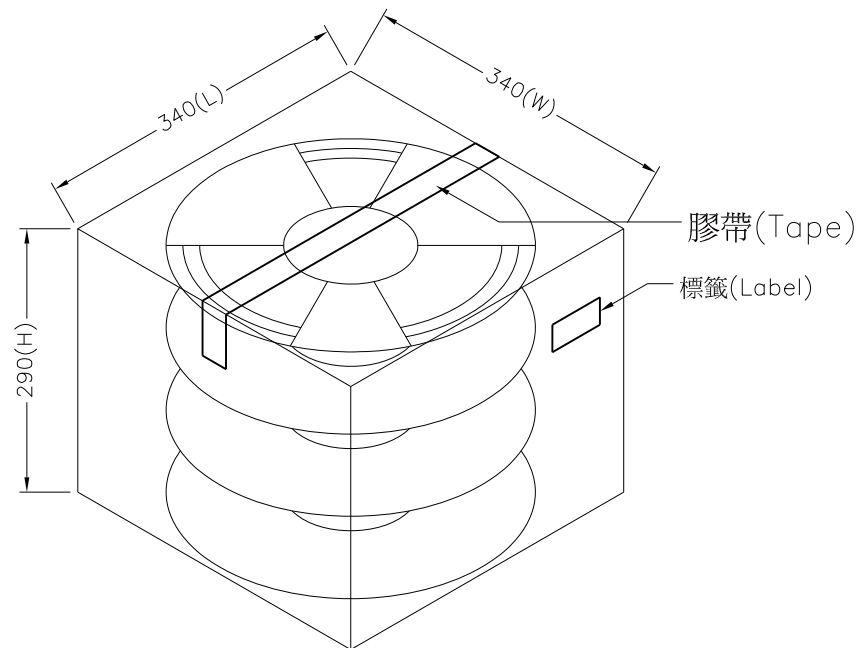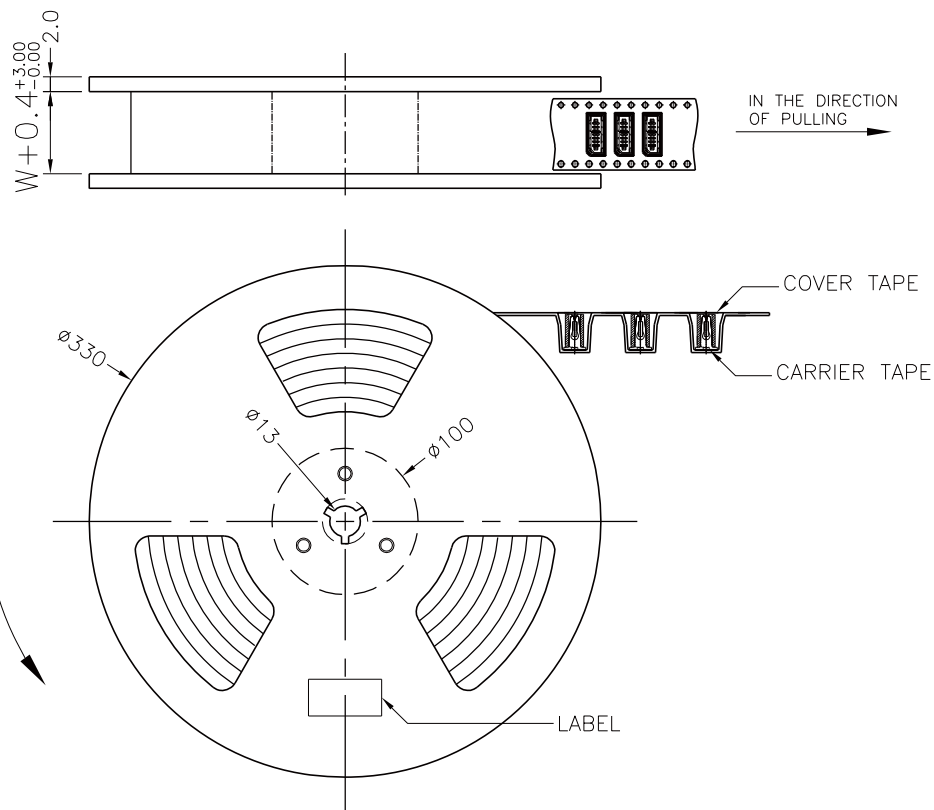

■ DIMENSION TABLE

NO. OF POS	NO.OF REEL	PACKAGING QUANTITY(PCS)
2	15	15000
3~9	10	10000
10~12	8	8000
13~22	6	6000
23~31	4	4000
32~36	3	3000

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.15

.XXX ± 0.08

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPB-VL2L56CR-xx-LF

SERIES REEL LEADFREE

180°SMT NON ZIF MYLAR 02~36WAY

DUAL CONTACT HIGH 5.6mm

L TYPE FOOT

DESCRIPTION: FPC 1.25mm 雙面接觸 SMT180° 卷裝作業圖