

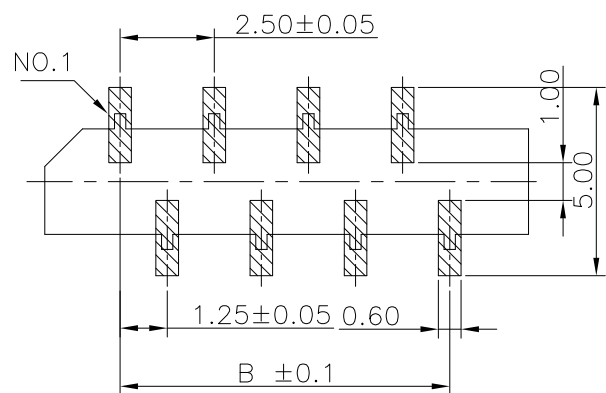
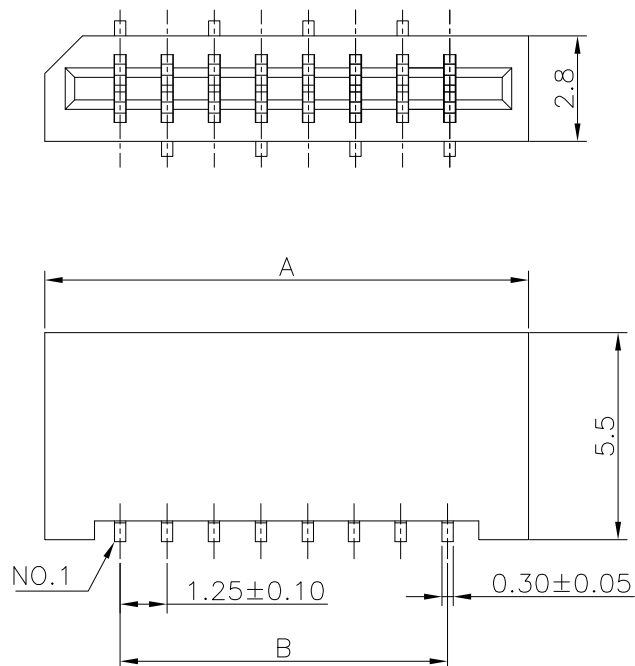


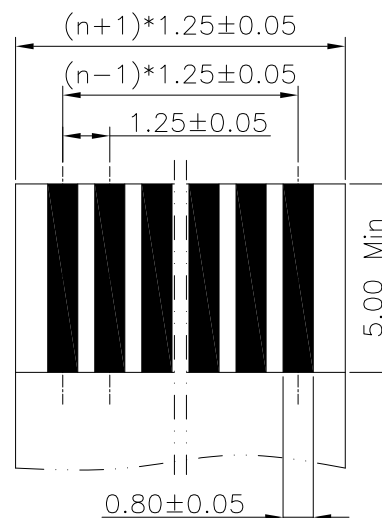

PCB Layout

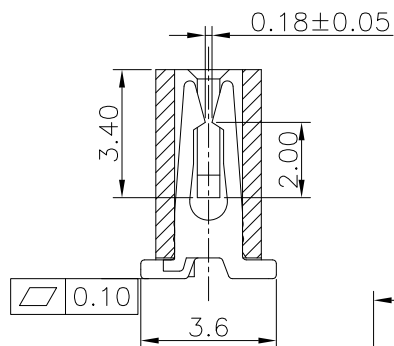

RECOMMENDED FPC SPEC
T=0.30±0.02mm

SPEC :

1. Housing: Hight-Temp Plastic, UL94-V
Color: Nature (Ivory) (LCP)
2. Contact: Phosphor Bronze (C5191)
3. Operating Voltage (Max): 500V AC
4. Current Rating (Max): 1.0A DC
5. Operating Temperature Range : -25°C ~ +85°C

孔数	A	B	C
2	5.25	1.25	3.85
3	6.50	2.50	5.10
4	7.75	3.75	6.35
5	9.00	5.00	7.60
6	10.25	6.25	8.85
7	11.50	7.50	10.10
8	12.75	8.75	11.35
9	14.00	10.00	12.60
10	15.25	11.25	13.85
11	16.50	12.50	15.10
12	17.75	13.75	16.35
13	19.00	15.00	17.60
14	20.25	16.25	18.85
15	21.50	17.50	20.10
16	22.75	18.75	21.35
17	24.00	20.00	22.60
18	25.25	21.25	23.85
19	26.50	22.50	25.10
20	27.75	23.75	26.35
21	29.00	25.00	27.60
22	30.25	26.25	28.85
23	31.50	27.50	30.10
24	32.75	28.75	31.35
25	34.00	30.00	32.60
26	35.25	31.25	33.85
27	36.50	32.50	35.10
28	37.75	33.75	36.35
29	39.00	35.00	37.60
30	40.25	36.25	38.85

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPB-VL2R56-xx-LF

SERIES T LEADFREE
02-30WAY
HIGH 5.6mm
180°SMT R TYPE FOOT
DUAL CONTACT
NON ZIF

DESCRIPTION: 1.25PH 5.5H 無蓋斜角立貼雙接錯腳位