
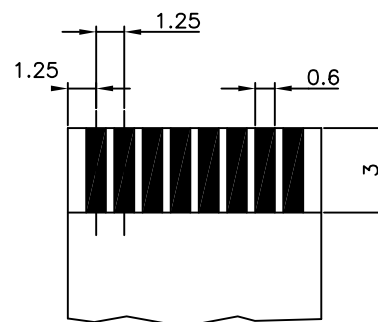
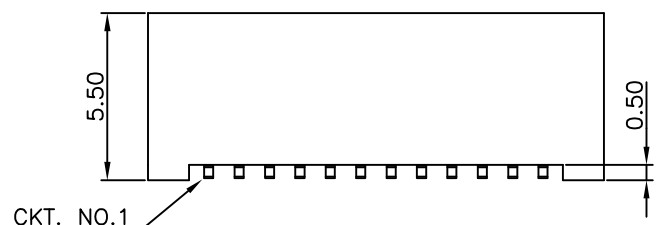
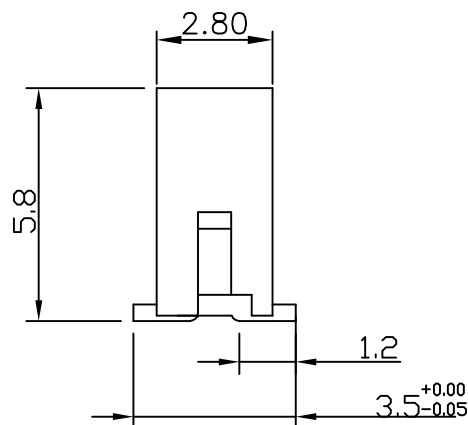


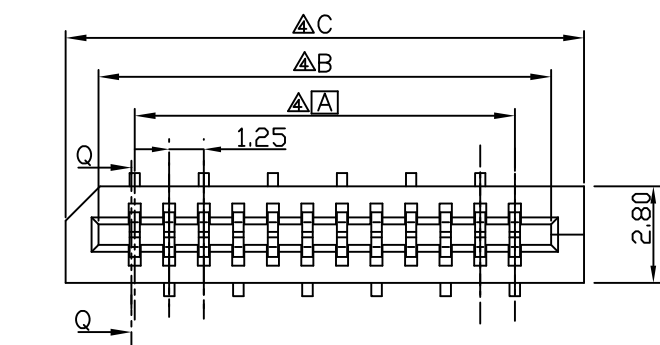

FFC/FPC DIMENSION
THICKNESS 0.26~0.32mm
TOLERANCE: 0.05mm

NOTES

1.MATERIAL:

SPACE:NYLON 46 (UL94V-0)

P :PPS

CONTACT: PHOSPHOR BRONZE

2.PLATING:

1.TIN / LEAD 120u" MIN OVER NICKEL 50u".

G. RoHS


Tin 100u" over NICKEL 50u"

3.PACKING: TUBE

4.DIM A=1.25mm*(CKT-1)

DIM B=DIM A+2.6mm

DIM C=DIM A+4mm



Q-Q SECTION

PC BOARD LAYOUT PCB T=1.6mm
TOP VIEW

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

FPB-VL2R58-xx-LF
SERIES
180°SMT
LEADFREE
03~30WAY
HIGH 5.8mm
R TYPE FOOT
DUAL CONTACT
NON ZIF

DESCRIPTION: