


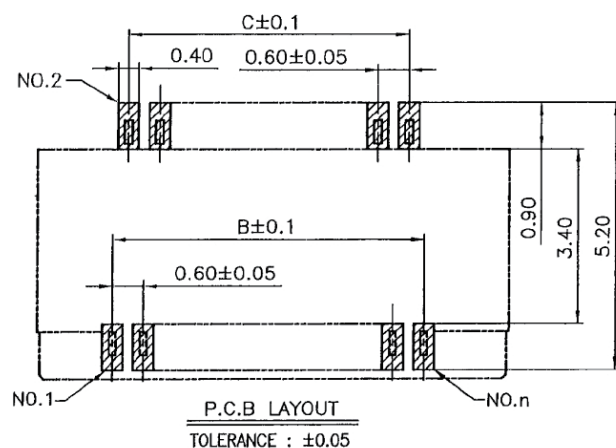
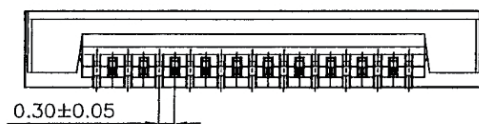


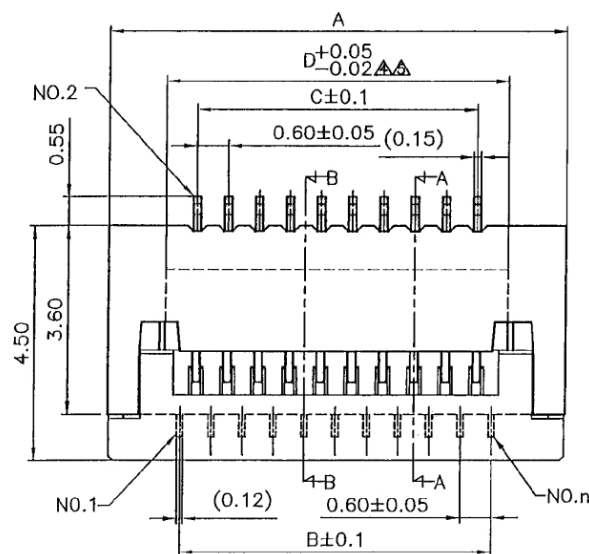

TOLERANCE : ±0.05




SECTION A-A

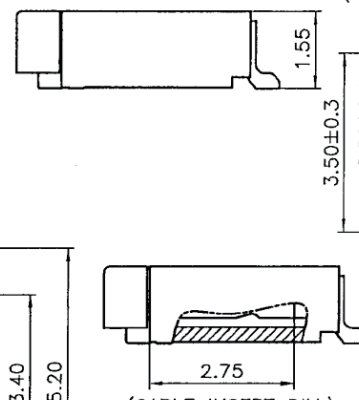

SECTION B-B

NOTES:MATERIAL & FINISH
1.HOUSING:HIGH-TEMPERATURE THERMOPLASTIC UL94V-0
COLOR:WHITE
2.ACTUATOR:HIGH-TEMPERATURE THERMOPLASTIC UL94V-0
COLOR:BLACK
3.CONTACT:COPPER ALLOY
PLATING:GOLD OR TIN OR TIN(LEAD FREE) OR MATTE-TIN PLATED

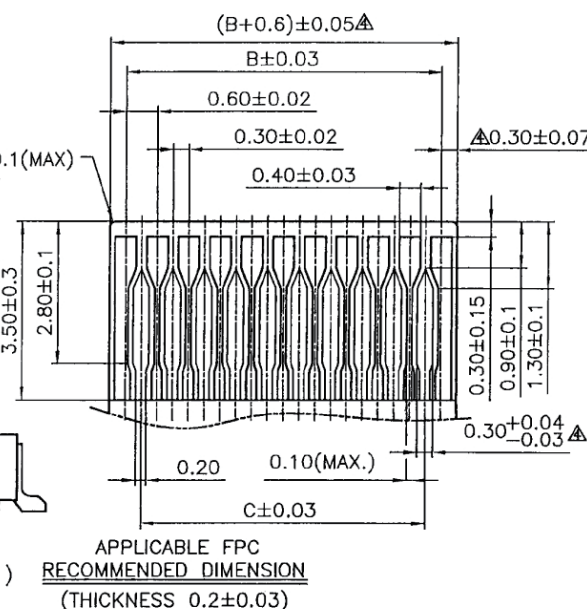

PIN	A	B	C	D△
05	4.0	1.2	0.6	1.85
07	4.6	1.8	1.2	2.45
09	5.2	2.4	1.8	3.05
11	5.8	3.0	2.4	3.65
13	6.4	3.6	3.0	4.25
15	7.0	4.2	3.6	4.85
17	7.6	4.8	4.2	5.45
19	8.2	5.4	4.8	6.05
21	8.8	6.0	5.4	6.65
23	9.4	6.6	6.0	7.25
25	10.0	7.2	6.6	7.85
27	10.6	7.8	7.2	8.45
29	11.4	8.4	7.8	9.05
31	12.0	9.0	8.4	9.65
33	12.4	9.6	9.0	10.25
35	13.0	10.2	9.6	10.85
37	13.6	10.8	10.2	11.45
39	14.2	11.4	10.8	12.05
41	14.8	12.0	11.4	12.65
43	15.4	12.6	12.0	13.25
45	16.0	13.2	12.6	13.85
47	16.6	13.8	13.2	14.45
49	17.2	14.4	13.8	15.05
51	17.8	15.0	14.4	15.65
53	18.4	15.6	15.0	16.25
55	19.0	16.2	15.6	16.85
57	19.6	16.8	16.2	17.45
59	20.6	17.4	16.8	18.05
61	20.8	18.0	17.4	18.65

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPT-WHB15-xx-LF

SERIES

LEADFREE
05~61WAY
HIGH 1.55mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION: