


SYMBOL	N	P	W	SP	M	A	TL	T	S1	S2	S3	S4	
RANGE	40	0.5	20.5	19.5	0.5	0	70	0.30	4.0	4.0	6.0	6.0	
TOLERANCE		±0.05	±0.1	±0.1	±0.1	<0.5	±2.0	±0.05	±1.0	±1.0	±2.0	±2.0	
CONDUCTOR SPECIFICATION		TIN PLATED COPPER WIRE (TIN 1~3um)		THICKNESS(Ct)		0.035		±0.005		WIDTH(Cw)		0.3 ±0.03	

FFC CABLE Charateristics特性表 UL STYLE: 20798

Test Item 測試項目	Testing Method 測試方法	Specification 規格
1 Conductor resistance 導體阻抗	JIS-C-3102(at20°C)	2.2 Ω/M MAX.
2 Insulation resistance 絕緣阻抗	Apply the voltage of DC 500V for min	More than 1000MΩ 大於1000MΩ
3 Dielectric Srrength 耐壓強度	AC 500V, 0.5Ma, 1分鐘, 相鄰兩導體在空氣中	PASS
4 Continuity Test 導通測試	Apply Test DC 3V	No open/Short Citcuit
5 Rated Voltage&Temperature 額定電壓及溫度	UL Sub, 758	60V 80°C
6 Operating Temperature 操作溫度	Fixed Wiring Condition	-30°C ~80°C
7 Flammability Test 耐燃性測試	UL Sub, 758 V W-1	PASS
8 Heat Resistance 抗熱測試	85°C / 96Hrs	No Trouble with insulation Resistance and withstand voltage 絕緣電阻與耐電壓符合要求
9 Humidity Resistance 抗溼測試	40°C , 95%RH, 96Hrs	
10 Temperature Cycling Test 溫度循環測試	-40°C for 4hrs--85°C for 4hrs--25°C for 1hrs (5 cyc)	
11 Sliding Test 柔性測試	R=Cable thickness	耐曲折測試 ≥ 30cycle
	15mmR, 70cycle/min , 25mm 往復運動	耐曲折測試 ≥ 100,000cycle
13 Abrasion Test 耐磨測試	Ø5mm, 600g, 60cycle/min	Min 10,000cycles 10,000回以上

RoHS Compliant


TOLERANCES ARE

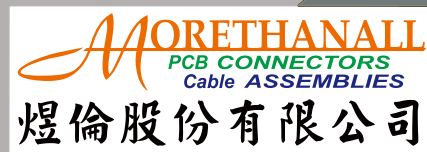

DRAWING BY CY		X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION



DESCRIPTION:

www.morethanall.com