


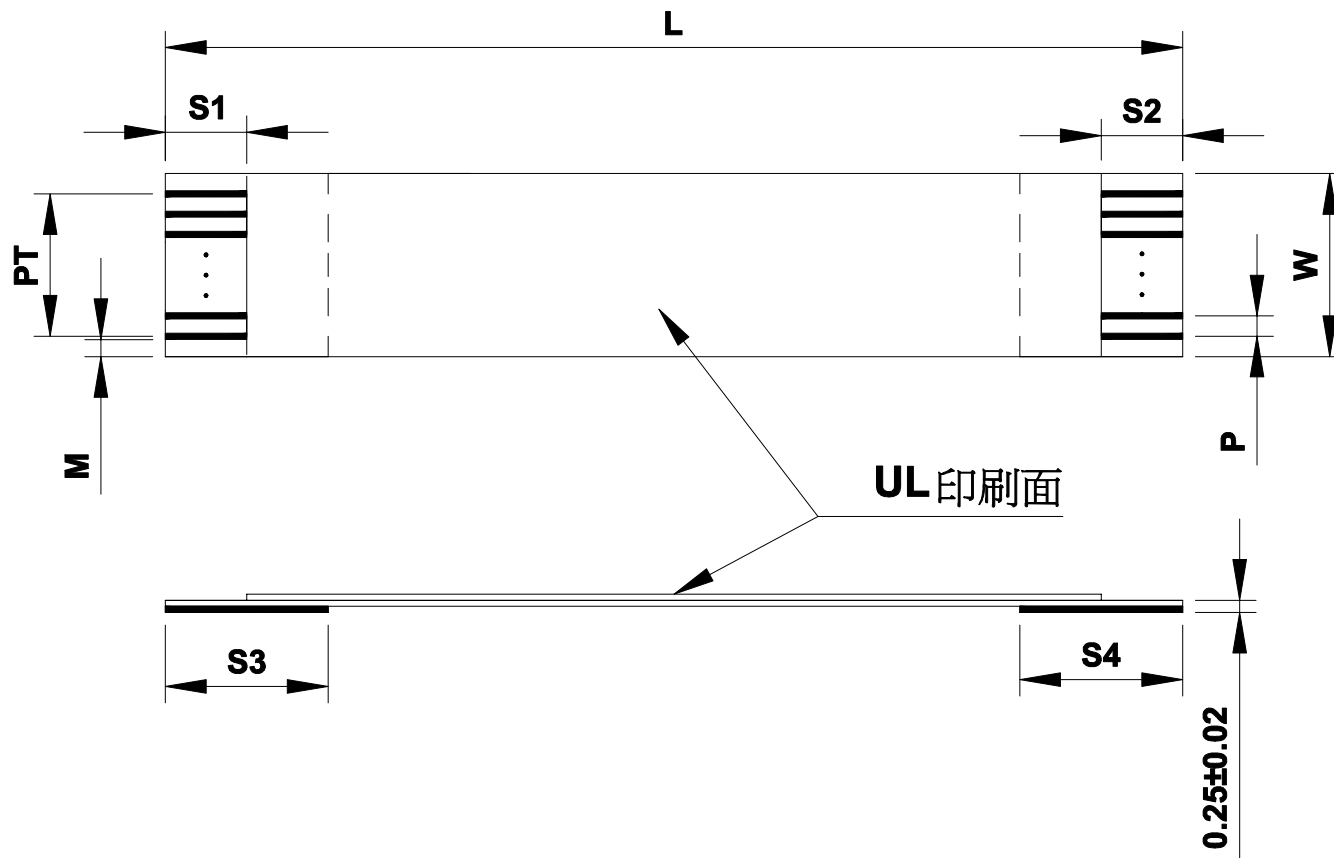

NOTES:

導體數	Num. of conductors	40pins
導體	conductor width	0.3*0.035mm
導體間距	Pitch(P)	0.5mm
成品總長度	L	100±2
成品總寬度	W	20.5±0.1
導體總間距	PT	19.5±0.15
邊緣寬度	M	0.35±0.1
露銅長度	S1	4±1
露銅長度	S2	4±1
加強板寬度	S3	6±1
加強板寬度	S4	6±1

Available UL Standard:2896 80°C,30V

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-CA40-100(025)-LF

SERIES

40

WAY

100mm

0.25mm

LEADFREE

SAME SIDE

CABLE

DESCRIPTION: