
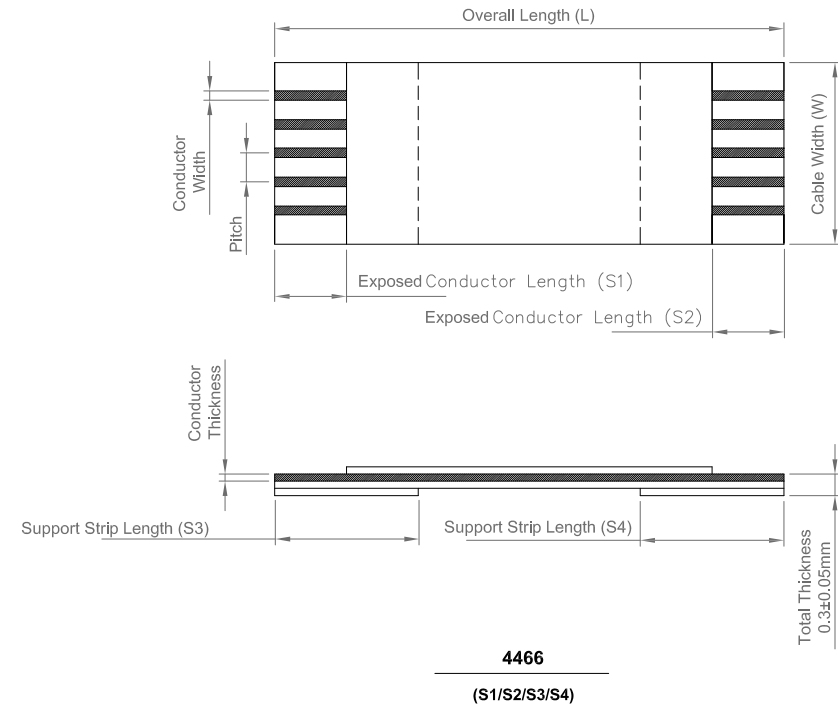


Cable Type A - Conductor Same Side

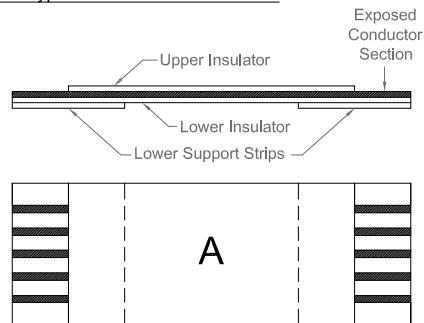

Specification

- Material:
Conductor: Tinned Copper or Gold-plated Copper
Insulation: Flame Retardant Polyester, Color: White
Supporting Tape: Polyester, Color: Blue
- Electrical:
Voltage Rating: 60V
Current Rating: 1A
- Mechanical & Environmental:
Operating Temperature: 80 °C
Durability: 30 Cycles
- Printing: UL 20624 80°C 60V

Cable Width (W)	
Pitch (mm)	Total Cable Width (mm)
0.50	0.5 x (No. of Conductors+1) ± 0.08mm

Item	Pitch 0.5mm
Conductor Size	0.035*0.300
No. of Conduct (N)	4 ~ 80
Total Length (TL)	25 ~ 1500
Exposed Conductor Length (S1/S2)	2, 3, 4, 5
Support Strip Length (S3/S4)	5, 6, 7, 8

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

ORDER INFORMATION

FPV-CAxx-xxx-LF
SERIES LEADFREE
025:25mm
150:150mm
CABLE 04~80 WAY
SAME SIDE

DESCRIPTION: Flat Flex Cable Ordering Information