



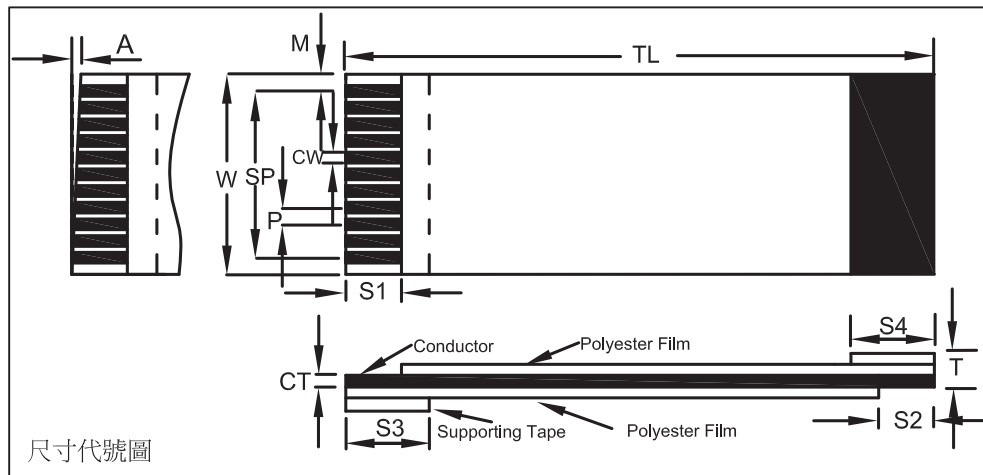

線材加工圖

加工項目:

1.線外加工:外導鋁箔麥拉包覆全段

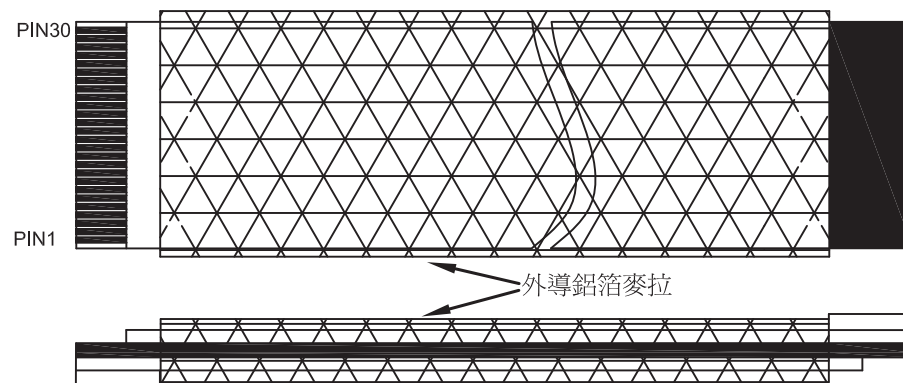

No. of Conductor	30										
SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
RANGE	0.5	15.5	14.5	0.5	0	150	0.4	4	4	6	6
TOLERANCE	±0.05	±0.1	±0.1	±0.1	±0.5	±2	±0.03	±1	±1	±2	±2
CONDUCTOR	Tin Plated Copper		Thickness(Ct)		0.05		±0.01				
SPECIFICATION	Wire (Tin 1~3um)		Width(Cw)		0.3		±0.03				

Note:

UL Style: 20798 80°C 60V

ROSH: YES

Operating Temperature: -30°C~85°C

Dielectric Strength: AC500V / 10ma / 1 min

Rated Current: 1A

儲存環境: 16°C~27°C / 濕度 65RH%

Material:

Insulation Film:

Polyester White

Supporting Tape:

Polyester Blue

Conductor:

Tin Plated Flat Copper Wire

EMI對策:

鋁箔麥拉+背膠

外導鋁箔麥拉結構表示圖



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FPV-CT30-150(040)-LF
SERIES T T T LEADFREE
150mm T:0.4mm
30 WAY
BOTH SIDE SHLD
CABLE

DESCRIPTION: 0.5PH 30PIN L=150mm D TYPE +鋁箔