

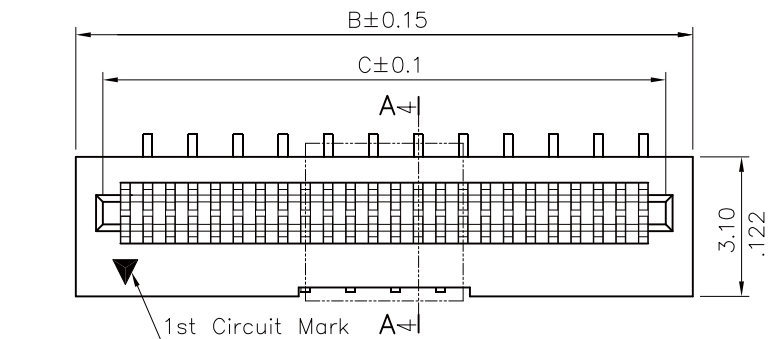
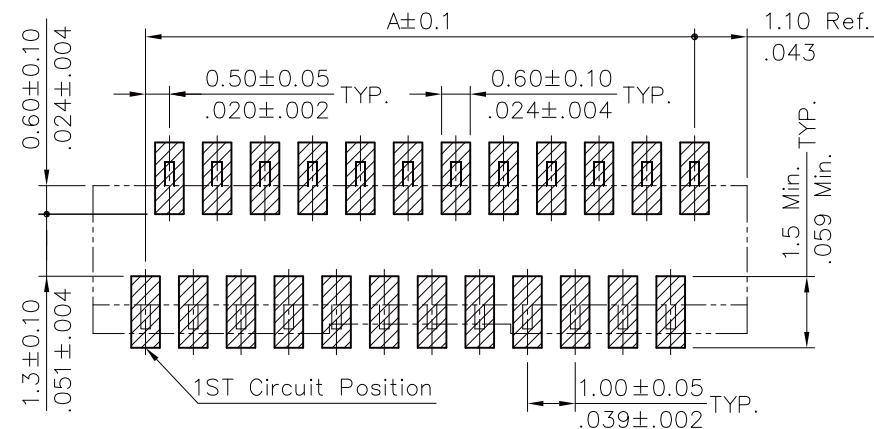
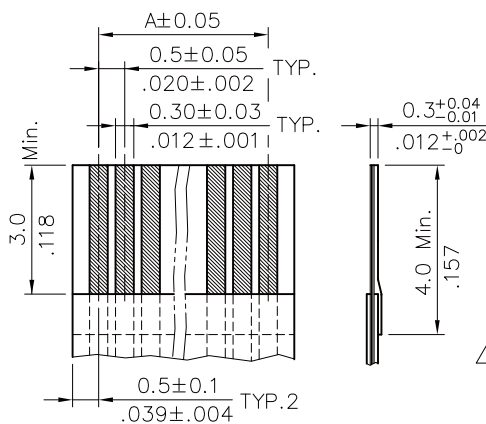
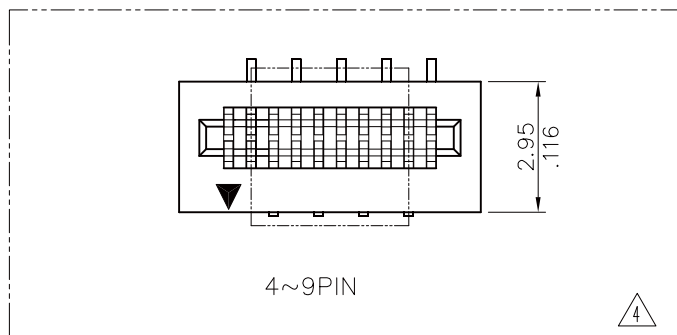


DETAIL "A-A"

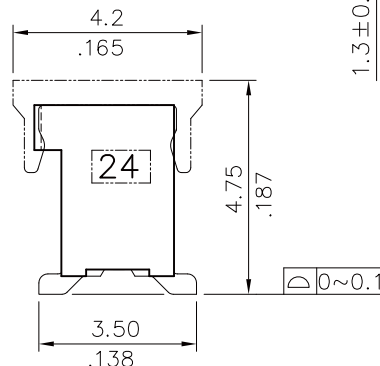

Sold Pad Pattern

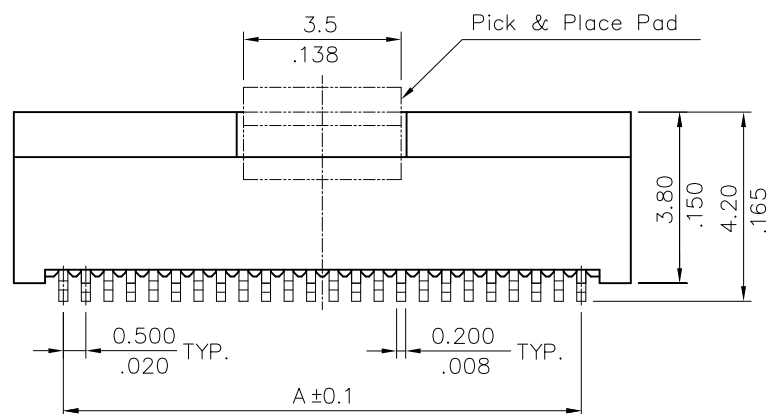

Accommodated FFC/FPC

Material :

- * Body : NYLON 6T UL 94V-0, Color Nature
- * Contact : Phosphor Bronze

$$A = 0.50 \times \text{No. of Spaces}$$

$$B = A + 2.2$$

$$C = A + 1.1$$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°


照片框

ORDER INFORMATION

FPV-VL2L42CR-xx-LF

SERIES
180°SMT
NON ZIF
DUAL CONTACT
LEADFREE
04-50WAY
REEL
CAP
HIGH 4.2mm
L TYPE FOOT POSITION



DESCRIPTION:

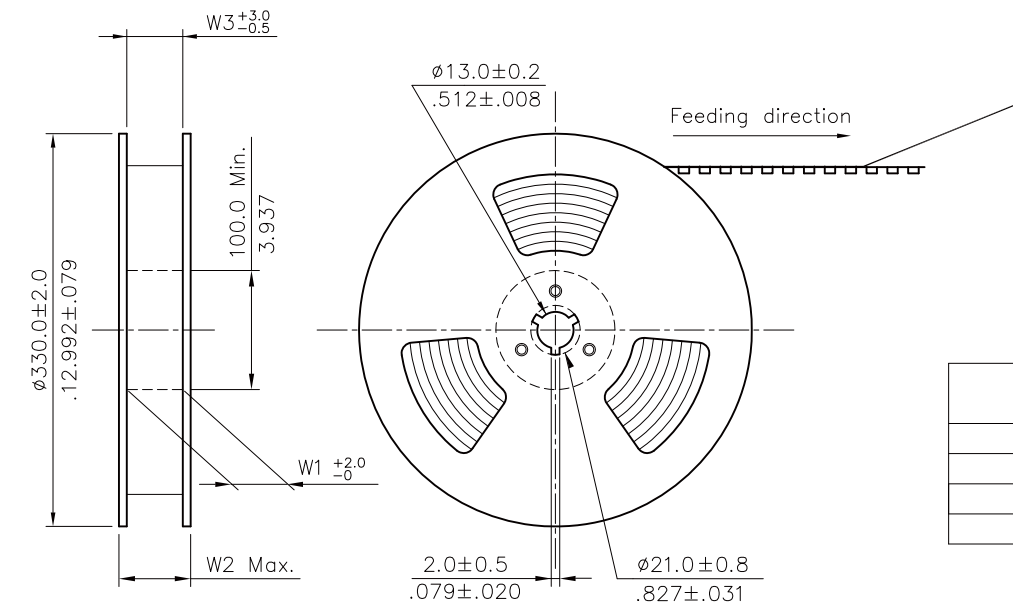


NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Clear,Transparent Polystyrene Alloy (UP-6000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.40 ± 0.05 mm.
6. Packing length per 22" reel : 98.5 Meters.
7. Component load per 13" reel : 1000 pcs.

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4-14	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
15-30	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
31-38	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
39-50	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5

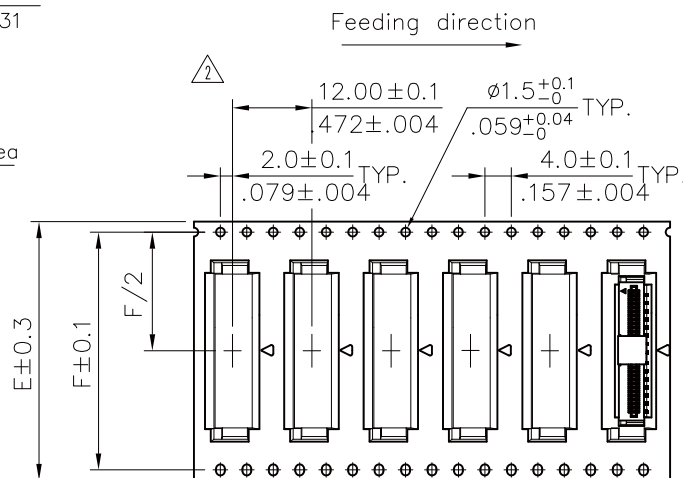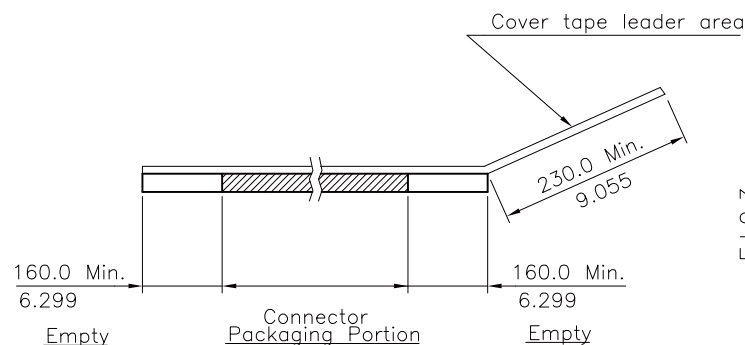

WIDTH : 32, 44 mm Carrier

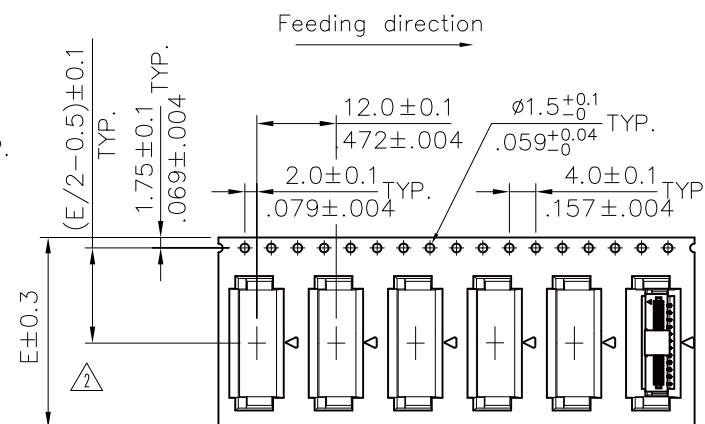

WIDTH : 16, 24 mm Carrier

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

FPV-VL2L42CR-xx-LF

SERIES LEADFREE
04-50WAY

180°SMT
NON ZIF
DUAL CONTACT
REEL
CAP
HIGH 4.2mm
L TYPE FOOT POSITION

DESCRIPTION: