

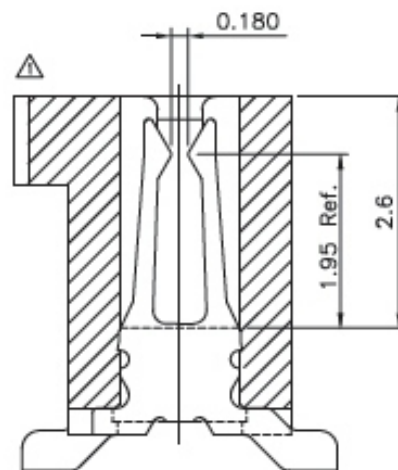
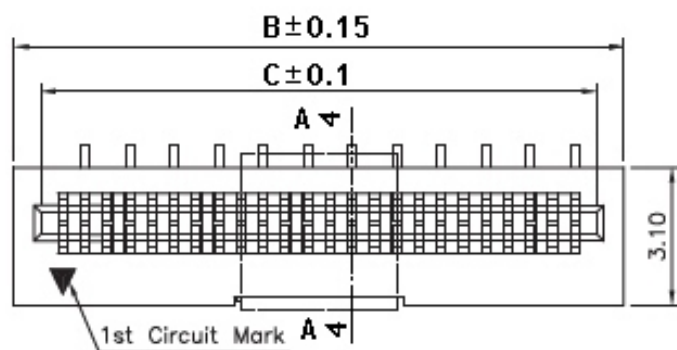
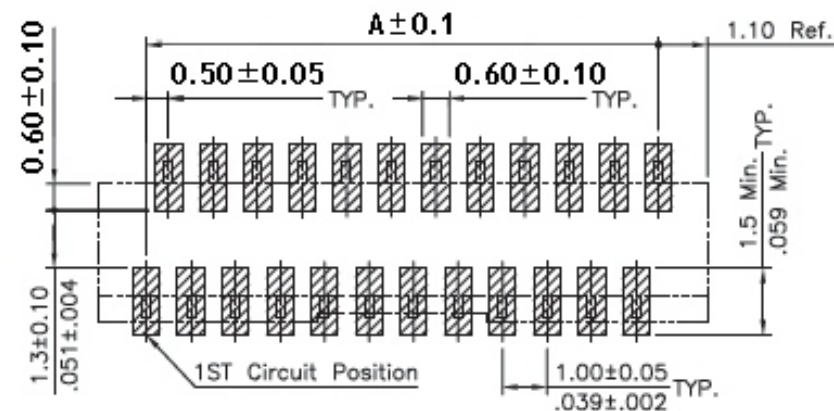


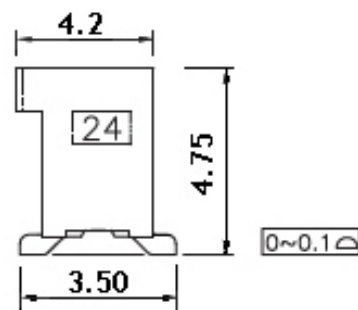

DETAIL "A-A" S:12/1

Material :

- * Body : NYLON 46 With 40% GF. UL 94V-0, Color Nature
- * Contact : Phosphor Bronze

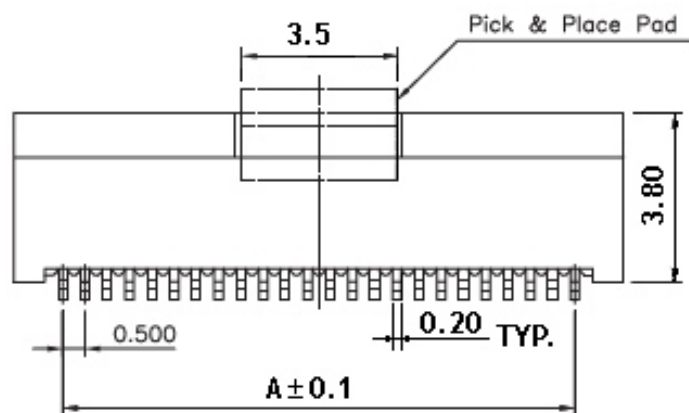

Solder Pad Pattern

A = 0.50 x No. of Spaces
B = A + 2.2
C = A + 1.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-VL2L47CR-xx-LF

SERIES LEADFREE

04~50WAY

REEL

CAP

180°SMT

NON ZIF

DUAL CONTACT

HIGH 4.75




L TYPE FOOT

DESCRIPTION:


NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Clear,Transparent Polystyrene Alloy (UP-6000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.40 ± 0.05 mm.
6. Packing length per 22" reel : 98.5 Meters.
7. Component load per 13" reel : 1000 pcs.

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4-14	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
15-30	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
31-38	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
39-50	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5

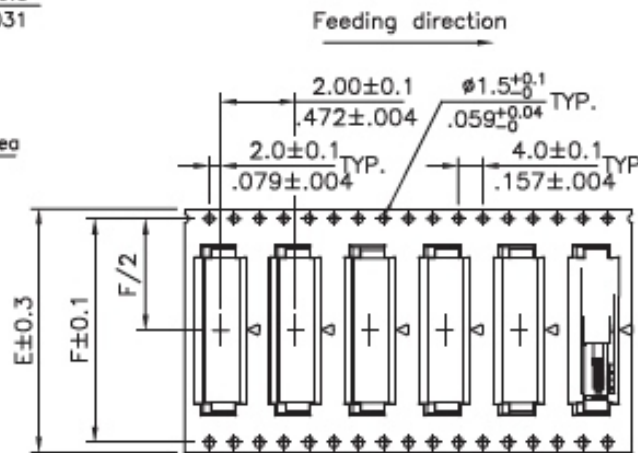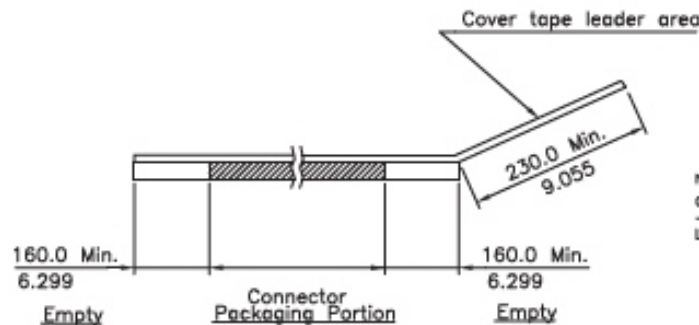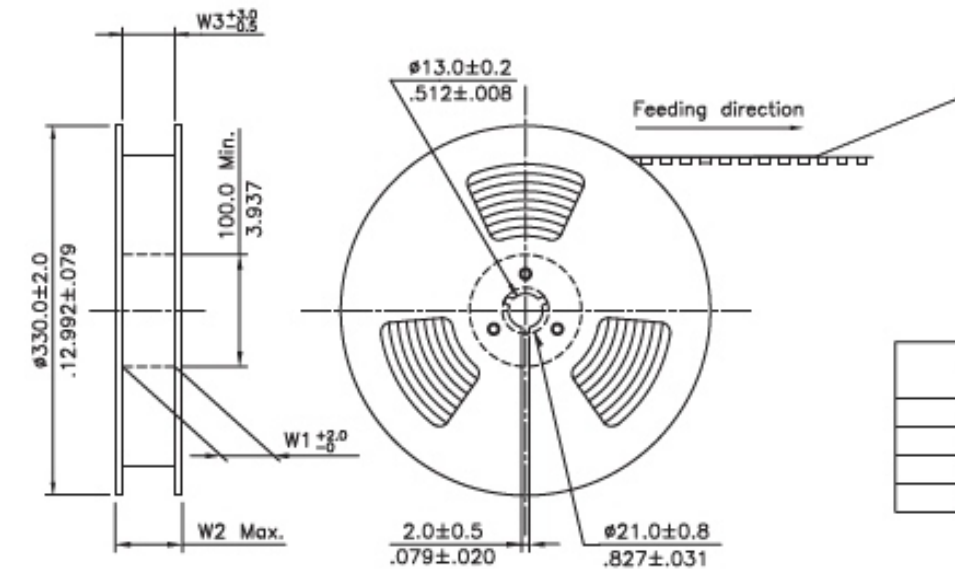

WIDTH : 32, 44 mm Carrier

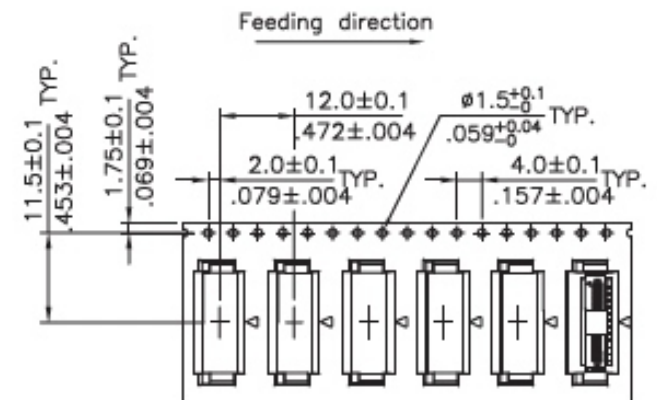

WIDTH : 16, 24 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$

X, $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

照片框

ORDER INFORMATION

FPV-VL2L47CR-xx-LF

SERIES LEADFREE

04-50WAY

REEL

CAP

180°SMT HIGH 4.75

NON ZIF L TYPE FOOT

DESCRIPTION: