

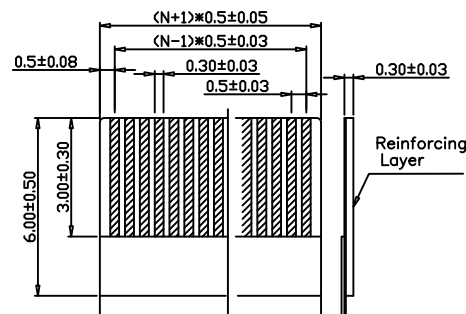
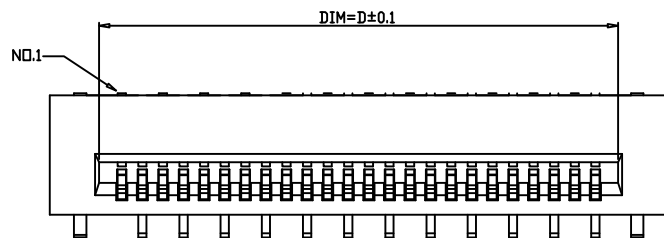


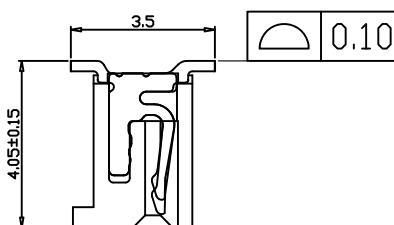


RECOMMENDED FFC/FPC DIM.

Material:



- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Terminal: Copper Alloy.
- 1.3 Fitting Nail: Copper Alloy.

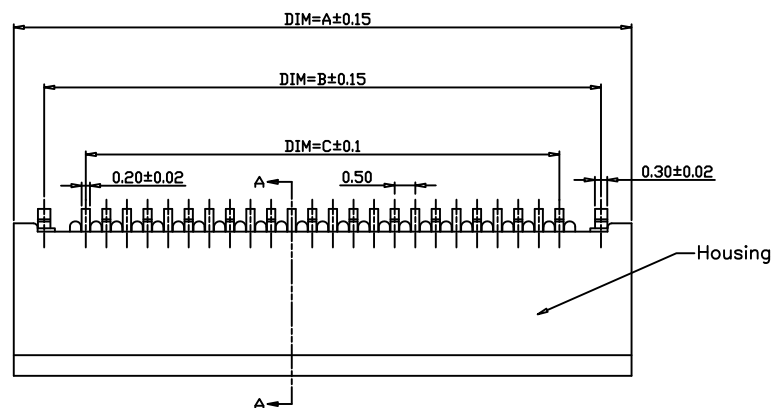

SECTION A-A

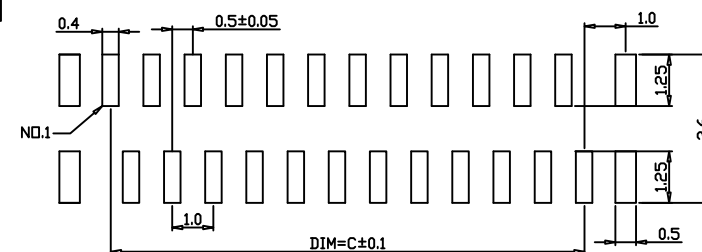

Negative PCB LAYOUT

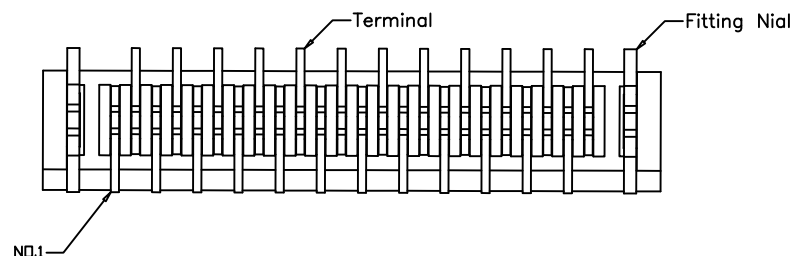

PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
6~N~50	N*0.5+3.0	N*0.5+1.50	N*0.5-0.50	N*0.5+0.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-VL2R40-xx-LF
SERIES T LEADFREE
06~50WAY
HIGH 4.05mm
180°SMT R TYPE FOOT
NON ZIF DUAL CONTACT

DESCRIPTION: 0.5mm non-ZIF FPC SMT VERTICAL TYPE