

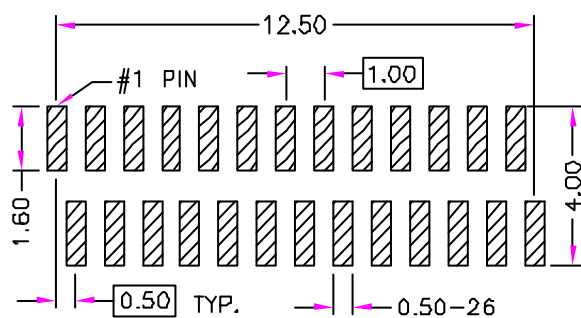



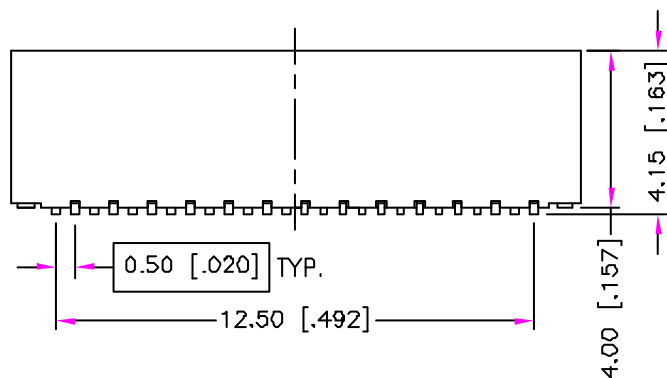

RECOMMEND P.C.B. LAYOUT
TOP VIEW

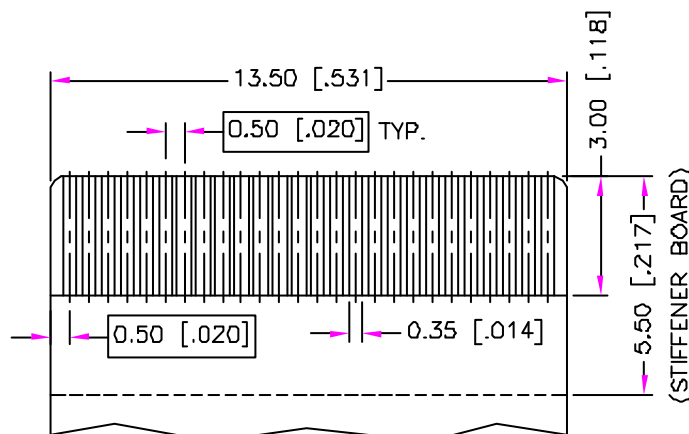


APPLICABLE FPC
RECOMMEND DIMENSION (t=0.30mm)

MATERIALS

1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0).
2. TERMINAL : COPPER ALLOY.

SPECIFICATION

1. CURRENT RATING : 0.5 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 200V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 500M OHMS MIN. AT 100V DC.
4. CONTACT RESISTANCE : 20m OHMS MAX.
5. OPERATING TEMPERATURE : -25°C TO +85°C.
6. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

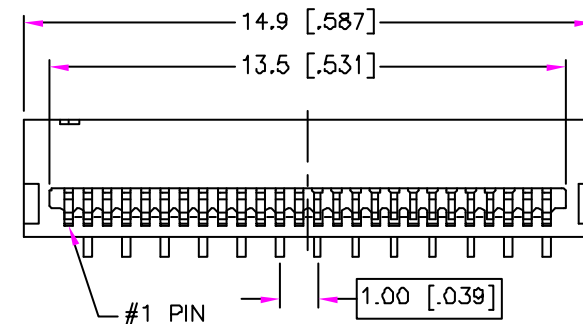

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-VL2R41-26-LF
SERIES T LEADFREE
26WAY
HIGH 4.15mm
180°SMT R TYPE FOOT
DUAL CONTACT
NON ZIF

DESCRIPTION: FPC CONNECTOR 0.50mm PITCH, P.C.B. MOUNT SMT, NON-ZIF