


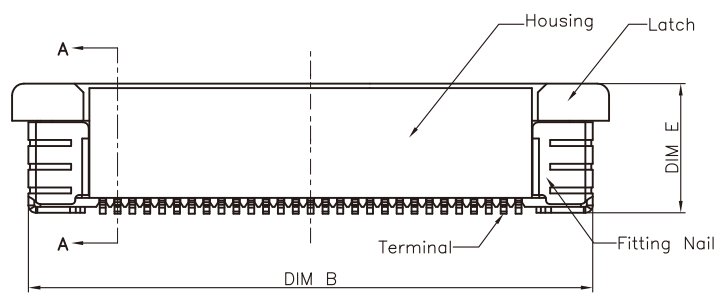


- Material:
- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
 - 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
 - 1.3 Terminal: Copper Alloy.
 - 1.4 Fitting Nail: Copper Alloy.
 - 1.5 CAP: Stainless steel or Copper Alloy.

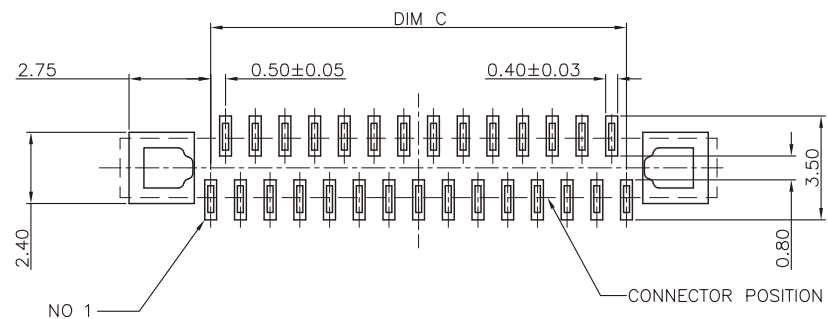

DIM E	
04~N~34	4.40
35~N~60	5.00

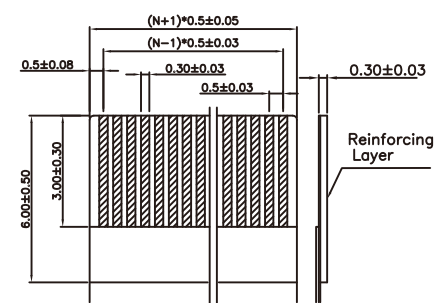

Positive PCB LAYOUT

PIN No.	DIM A	DIM B	DIM C	DIM D
04~N~60	Nx0.5+5.6	Nx0.5+4.5	Nx0.5-0.5	Nx0.5+0.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±



ORDER INFORMATION

FPV-VZAL44(50)-xx-LF
SERIES | | | | LEADFREE
180°SMT | | | | 04~60WAY
ZIF | | | | HIGH 5.0mm
| | | | HIGH 4.40mm
| | | | L:L TYPE
UPPER/CONTACT

DESCRIPTION: 0.5mm ZIF FPC CONNECTOR SMT VERTICAL