

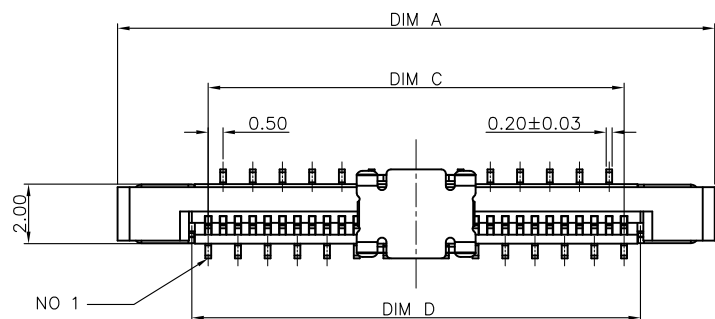
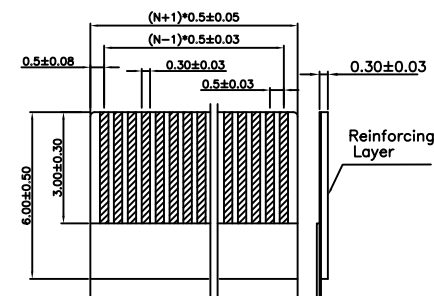



SECTION A-A

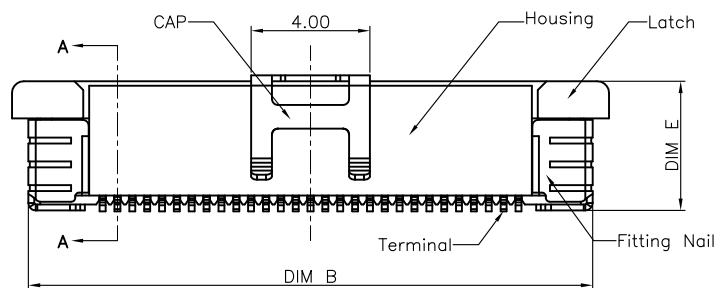

RECOMMENDED FFC/FPC DIM.

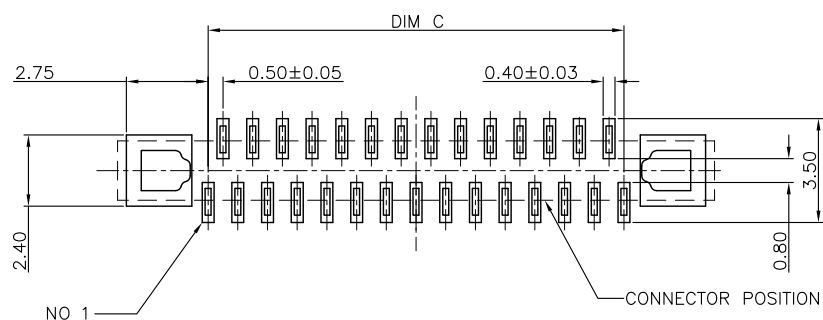

Positive PCB LAYOUT

DIM E		
04~N~34	4.40	MYLAR
35~N~60	5.00	CAP

PIN No.	DIM A	DIM B	DIM C	DIM D
04~N~60	Nx0.5+5.6	Nx0.5+4.5	Nx0.5-0.5	Nx0.5+0.6

Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
- 1.3 Terminal: Copper Alloy.
- 1.4 Fitting Nail: Copper Alloy.
- 1.5 CAP: Stainless steel or Copper Alloy.
- 1.6 Tape & Reel w/MYLAR, w/CAP Standard packaging.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPV-VZAL44(50)C-xx-LF

SERIES
180°SMT
ZIF
UPPER/CONTACT
L:L TYPE
LEADFREE
04~60WAY
MYLAR / CAP
HIGH 5.0mm
HIGH 4.40mm

DESCRIPTION: 0.5mm ZIF FPC CONNECTOR SMT VERTICAL w/ CAP TYPE