
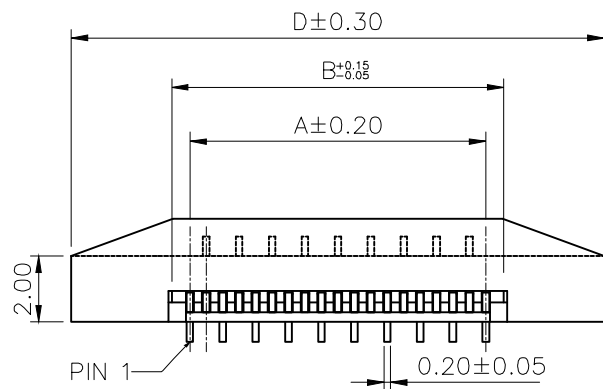
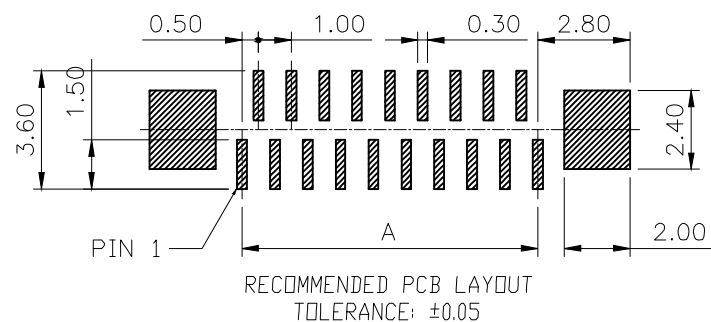
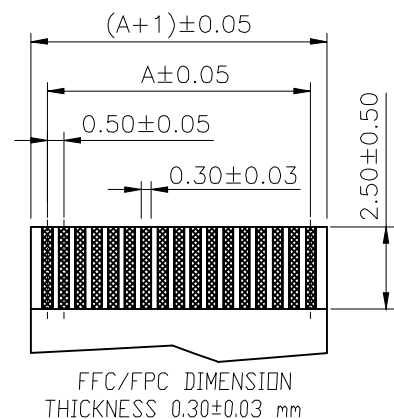



SECTION A-A

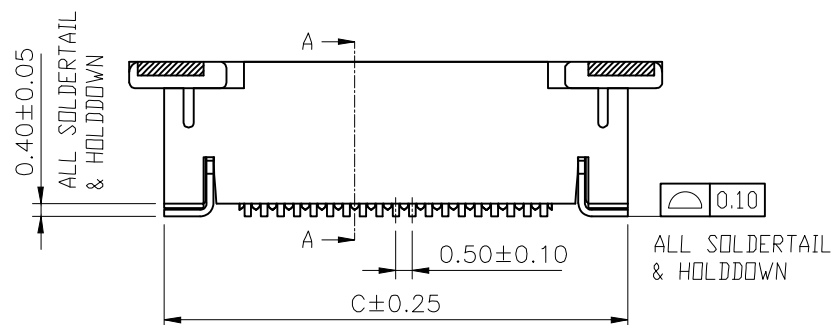

NOTE:

■ MATERIAL AND FINISH

HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
CONTACT:COPPER ALLOY
PLATING:TIN OR GOLD PLATED OVER NICKEL.
HOLDDOWN:COPPER ALLOY. PLATING:TIN PLATED OVER NICKEL.

■ ELECTRICAL

CURRENT:0.5A MAX.
DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.
CONTACT RESISTANCE:30mΩ MAX.
INSULATION RESISTANCE:100MΩ MIN.

ENVIRONMENTAL

TEMPERATURE:-25°C TO +85°C

■ DIMENSIONAL INFORMATION

Pos.	Dimension				
	A	B	C	D	E
6	2.50	3.60	7.60	9.70	4.70
8	3.50	4.60	8.60	10.70	4.70
10	4.50	5.60	9.60	11.70	4.70
12	5.50	6.60	10.60	12.70	4.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-VZAL4731-xx-LF

SERIES
180°SMT
ZIF
LEAD FREE
06~12WAY
WIDTH 3.15mm
HIGH 4.7mm
L TYPE FOOT POSITION
SINGLE CONTACT

DESCRIPTION: