




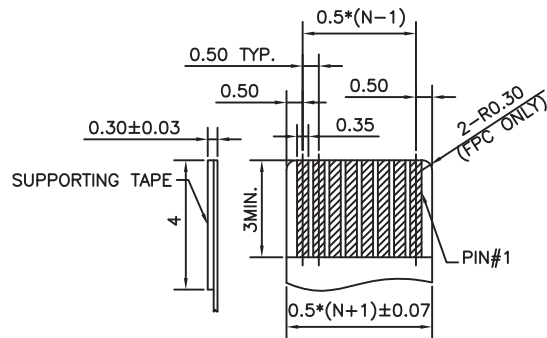

APPLICABLE FPC/FFC LAYOUT
GENERAL TOLERANCE ± 0.05

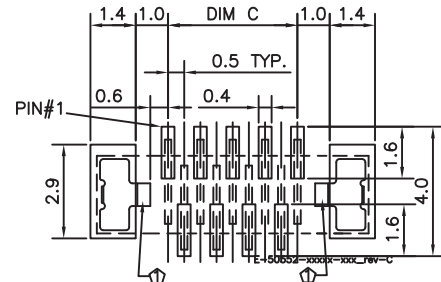

RECOMMENDED PCB LAYOUT(ODD PIN)
GENERAL TOLERANCE ± 0.05

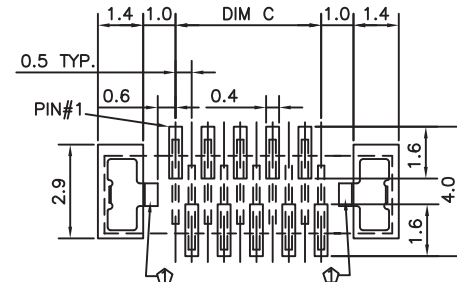

RECOMMENDED PCB LAYOUT(EVEN PIN)
GENERAL TOLERANCE ± 0.05

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
- 1.2 ACTUATOR: THERMOPLASTIC, HIGH TEMP., UL94V-0;
- 1.3 CONTACT: COPPER ALLOY
- 1.4 FITTING NAIL: COPPER ALLOY

2. FINISH:


2.1 CONTACT:

- 50u" MIN. NICKEL UNDERPLATING OVERALL.
N:100u" MIN. MATTE TIN PLATING OVERALL,
1:GOLD FLASH OVERALL.
C:GOLD FLASH(1u" MIN),15u" Au ON CONTACT
B:GOLD FLASH(1u" MIN),5u" Au ON CONTACT


2.2 FITTING NAIL:

- 50u" MIN. NICKEL UNDERPLATING OVERALL.
N:100u" MIN. MATTE TIN PLATING OVERALL,
1:GOLD FLASH OVERALL.




3. REFLOW SOLDER CAPABLE TO 260°C

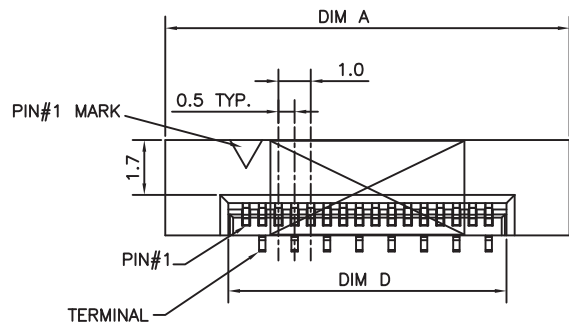


OPEN THIS SPACE FOR FITTING NAIL PLATE AREA

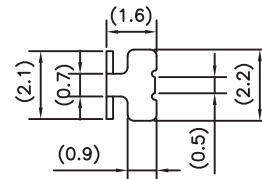

FITTING NAIL PLATE DIM.

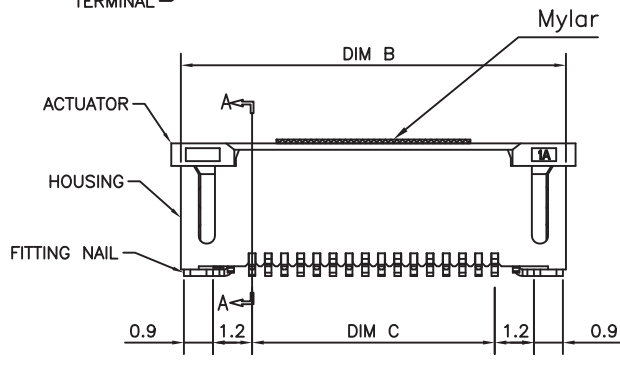

SECTION A-A

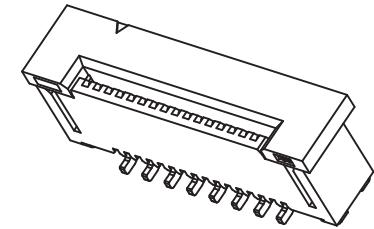

CKTS	DIM A	DIM B	DIM C	DIM D	CKTS	DIM A	DIM B	DIM C	DIM D
006	7.5	6.9	2.5	3.6	029	19	18.4	14	15.1
007	8	7.4	3	4.1	030	19.5	18.9	14.5	15.6
008	8.5	7.9	3.5	4.6	031	20	19.4	15	16.1
009	9	8.4	4	5.1	032	20.5	19.9	15.5	16.6
010	9.5	8.9	4.5	5.6	033	21	20.4	16	17.1
011	10	9.4	5	6.1	034	21.5	20.9	16.5	17.6
012	10.5	9.9	5.5	6.6	035	22	21.4	17	18.1
013	11	10.4	6	7.1	036	22.5	21.9	17.5	18.6
014	11.5	10.9	6.5	7.6	037	23	22.4	18	19.1
015	12	11.4	7	8.1	038	23.5	22.9	18.5	19.6
016	12.5	11.9	7.5	8.6	039	24	23.4	19	20.1
017	13	12.4	8	9.1	040	24.5	23.9	19.5	20.6
018	13.5	12.9	8.5	9.6	041	25	24.4	20	21.1
019	14	13.4	9	10.1	042	25.5	24.9	20.5	21.6
020	14.5	13.9	9.5	10.6	043	26	25.4	21	22.1
021	15	14.4	10	11.1	044	26.5	25.9	21.5	22.6
022	15.5	14.9	10.5	11.6	045	27	26.4	22	23.1
023	16	15.4	11	12.1	046	27.5	26.9	22.5	23.6
024	16.5	15.9	11.5	12.6	047	28	27.4	23	24.1
025	17	16.4	12	13.1	048	28.5	27.9	23.5	24.6
026	17.5	16.9	12.5	13.6	049	29	28.4	24	25.1
027	18	17.4	13	14.1	050	29.5	28.9	24.5	25.6
028	18.5	17.9	13.5	14.6					

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.50
.XX $\pm$ 0.15
.XXX $\pm$ 0.10
ANG $\pm$ 2°

PPOJECTION

照片框

ORDER INFORMATION

FPV-VZAR41C-xx-LF



DESCRIPTION: 0.5mm PITCH ZIF CONN. SMT S/T TYPE