

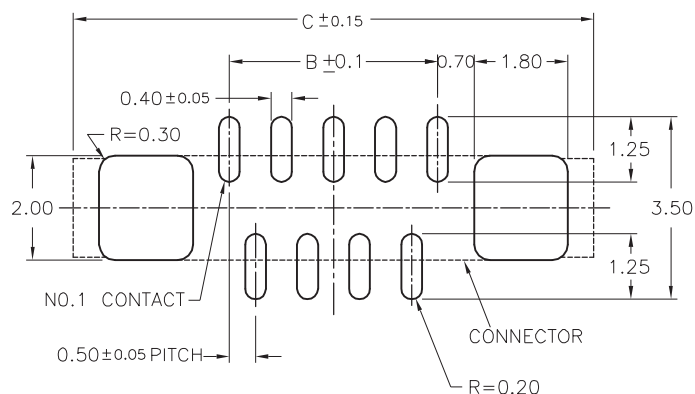
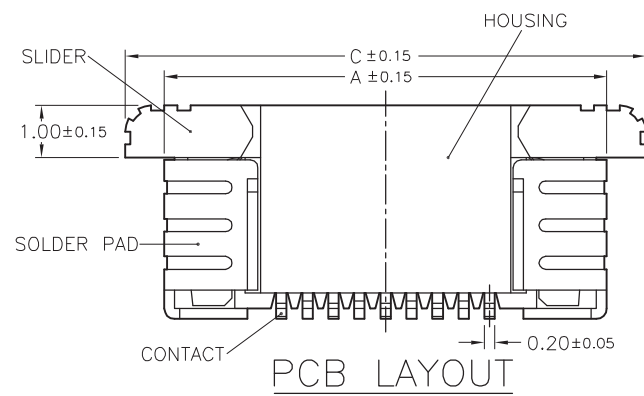


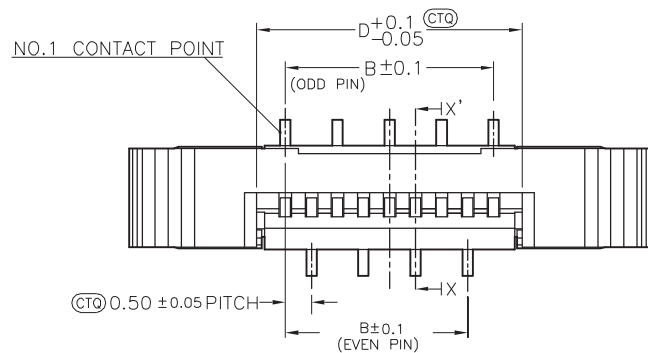


NOTE:

- 1.MATERIAL:
HOUSING:LCP
SLIDER:LCP
CONTACTS:PHOSPHOR BRONZE
SOLDER PAD:BRASS
- 2.PLATING:
CONTACTS:SEE ORDERING INFORMATION
SOLDER PAD:SEE ORDERING INFORMATION
- 3.RATING:
OPERATING VOLTAGE:50V
CURRENT RATING:0.4A
OPERATING TEMPERATURE:-55°C ~ +85°C

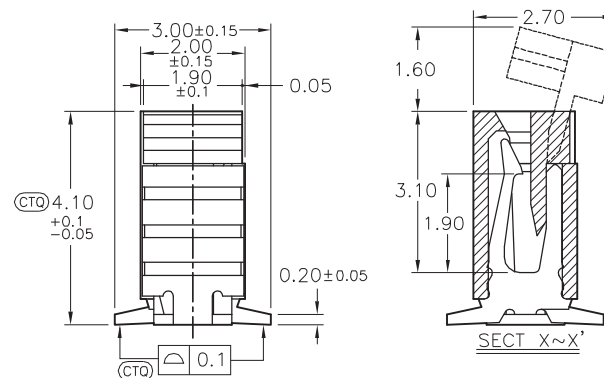

APPLICABLE FPC

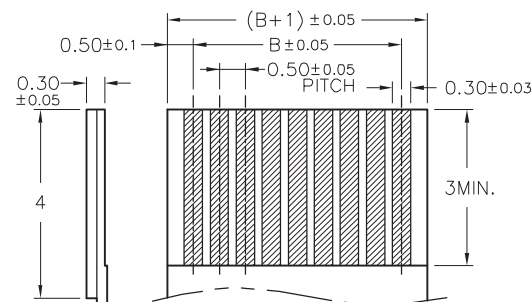

No.of Contacts	DIM. A	DIM. B	DIM. C	DIM. D
04	6.0	1.5	7.5	2.6
05	6.5	2.0	8.0	3.1
06	7.0	2.5	8.5	3.6
07	7.5	3.0	9.0	4.1
08	8.0	3.5	9.5	4.6
09	8.5	4.0	10.0	5.1
10	9.0	4.5	10.5	5.6
11	9.5	5.0	11.0	6.1
12	10.0	5.5	11.5	6.6
13	10.5	6.0	12.0	7.1
14	11.0	6.5	12.5	7.6
15	11.5	7.0	13.0	8.1
16	12.0	7.5	13.5	8.6
17	12.5	8.0	14.0	9.1
18	13.0	8.5	14.5	9.6
19	13.5	9.0	15.0	10.1
20	14.0	9.5	15.5	10.6
21	14.5	10.0	16.0	11.1
22	15.0	10.5	16.5	11.6
23	15.5	11.0	17.0	12.1
24	16.0	11.5	17.5	12.6
25	16.5	12.0	18.0	13.1
26	17.0	12.5	18.5	13.6
27	17.5	13.0	19.0	14.1
28	18.0	13.5	19.5	14.6
29	18.5	14.0	20.0	15.1
30	19.0	14.5	20.5	15.6
31	19.5	15.0	21.0	16.1
32	20.0	15.5	21.5	16.6
33	20.5	16.0	22.0	17.1
34	21.0	16.5	22.5	17.6
35	21.5	17.0	23.0	18.1
36	22.0	17.5	23.5	18.6
37	22.5	18.0	24.0	19.1
38	23.0	18.5	24.5	19.6
39	23.5	19.0	25.0	20.1
40	24.0	19.5	25.5	20.6
41	24.5	20.0	26.0	21.1
42	25.0	20.5	26.5	21.6
43	25.5	21.0	27.0	22.1
44	26.0	21.5	27.5	22.6
45	26.5	22.0	28.0	23.1
46	27.0	22.5	28.5	23.6
47	27.5	23.0	29.0	24.1
48	28.0	23.5	29.5	24.6
49	28.5	24.0	30.0	25.1
50	29.0	24.5	30.5	25.6

本部品不含有環境管理物質規定之有害物質

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框





ORDER INFORMATION

FPV-VZAR41CR-xx-LF



SERIES LEAD FREE
180°SMT REEL
ZIF CAP HIGH 4.1mm
SINGLE CONTACT R TYPE FOOT POSITION

DESCRIPTION: 0.5mm PITCH FPC/FFC CONNECTOR

EMBOSSED TAPE PACKING

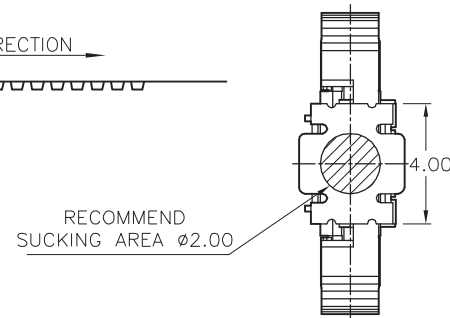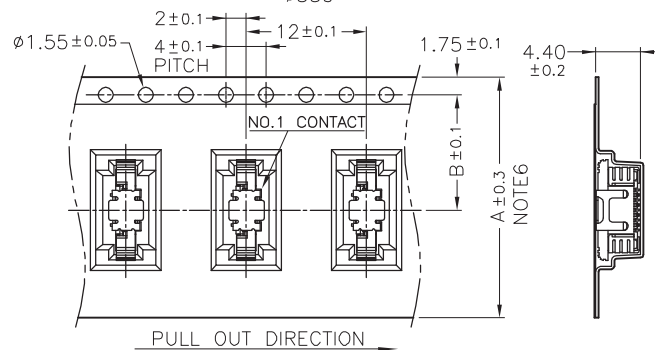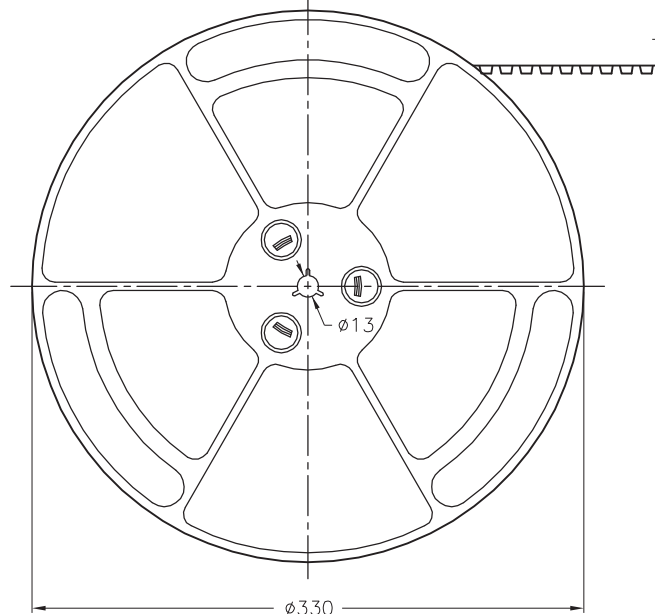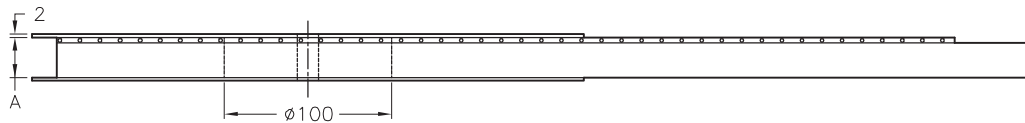

OPTIONAL VACUUM CAP FOR ROBOTIC PLACEMENT

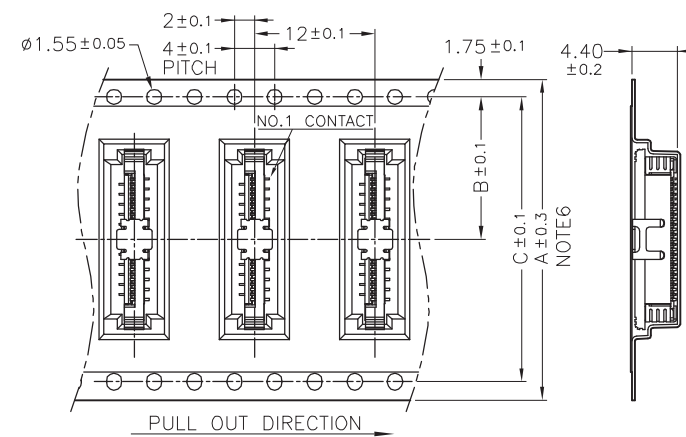

NOTE:

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2 .
- 2.CARRIER CAMBER IS WITHIN 1 mm IN 100mm.
- 3.MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY 100% RECYCLABLE.
- 4.THICKNESS : 0.30 ± 0.05 mm
- 5.COMPONENT LOAD PER 13" REEL :1000 PCS.
- 6.FOR TAPE WIDTH (DIMENSION A) 24mm A PILOT HOLE IS PROVIDED ON ONE SIDE.
FOR TAPE WIDTH (DIMENSION A) 32mm AND 44mm PILOT HOLES ARE PROVIDED ON BOTH SIDES.

Note6

NO.OF CONTACTS	DIM. A	DIM. B	DIM. C
04 ↓ 23	24	11.5	—
24 ↓ 33	32	14.2	28.4
34 ↓ 50	44	20.2	40.4

本部品不含有環境管理物質規定之有害物質

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION


FPV-VZAR41CR-xx-LF

SERIES LEAD FREE

180°SMT REEL

SINGLE CONTACT CAP HIGH 4.1mm
R TYPE FOOT POSITION

DESCRIPTION: 0.5mm PITCH FPC/FFC CONNECTOR

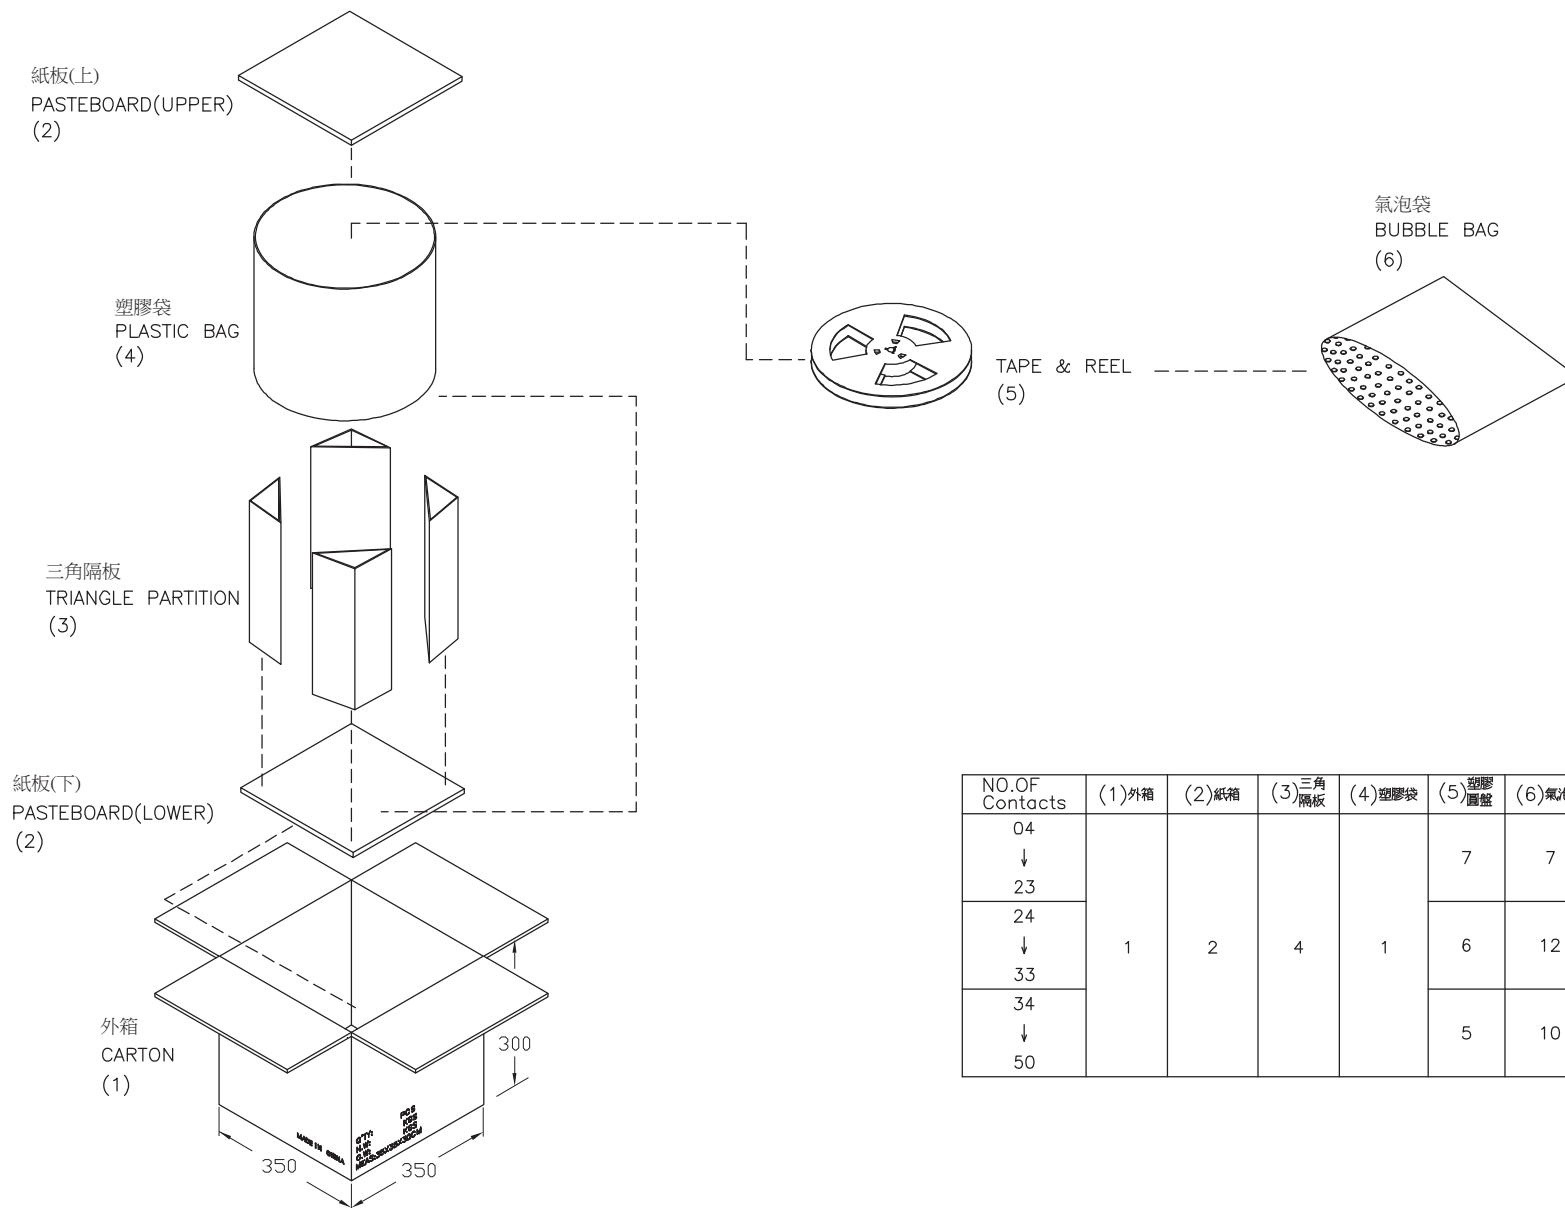

NO.OF Contacts	(1)外箱	(2)紙箱	(3)三角 隔板	(4)塑膠袋	(5)塑膠 圓盤	(6)氣泡袋
04 ↓ 23	1	2	4	1	7	7
24 ↓ 33					6	12
34 ↓ 50					5	10

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-VZAR41CR-xx-LF

SERIES | | | | | LEAD FREE
180°SMT | | | | | REEL
ZIF | | | | | CAP
SINGLE CONTACT | | | | | HIGH 4.1mm
R TYPE FOOT POSITION

DESCRIPTION: 0.5mm PITCH FPC/FFC CONNECTOR