
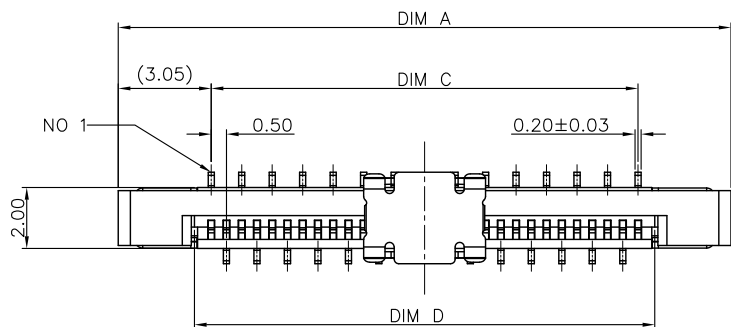





SECTION A-A

Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
- 1.3 Terminal: Copper Alloy.
- 1.4 Fitting Nail: Copper Alloy.
- 1.5 CAP: Stainless steel or Copper Alloy.

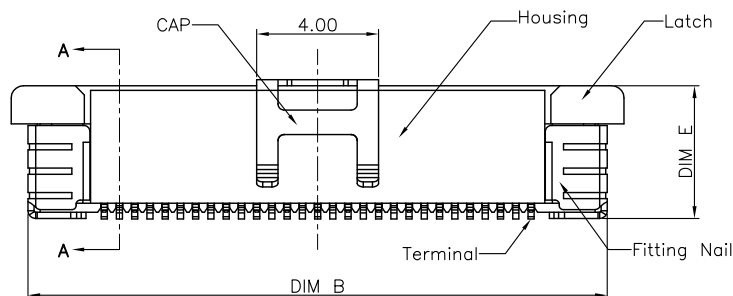

DIM E	
04~N~34	4.40
35~N~60	5.00

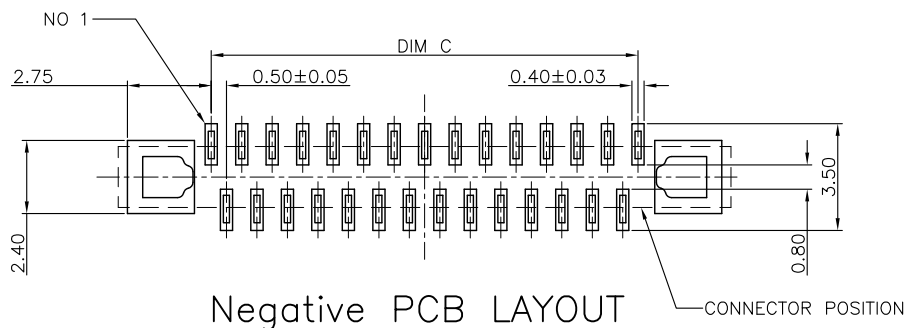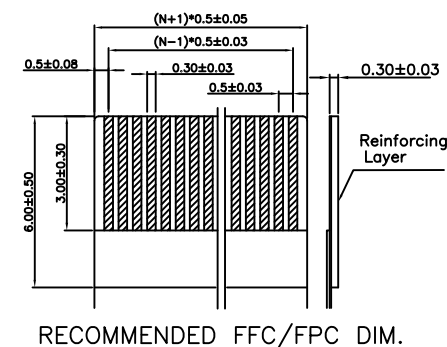

PIN No.	DIM A	DIM B	DIM C	DIM D
04~N~60	Nx0.5+5.6	Nx0.5+4.5	Nx0.5-0.5	Nx0.5+0.6

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAR44(50)C-xx-LF

SERIES 180°SMT ZIF
SINGLE CONTACT R TYPE FOOT

CAP

44:HIGH 4.4mm
50:HIGH 5.0mm

LEAD FREE
04~60WAY

DESCRIPTION: 0.5mm ZIF FPC CONNECTOR SMT VERTICAL w/ CAP TYPE