
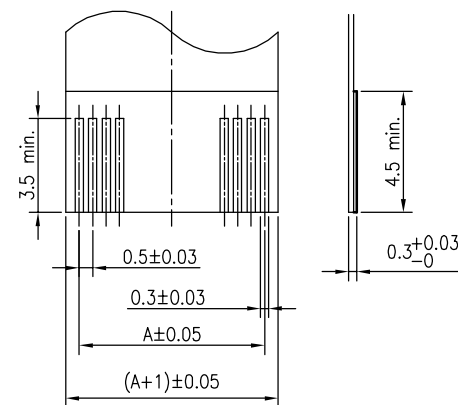
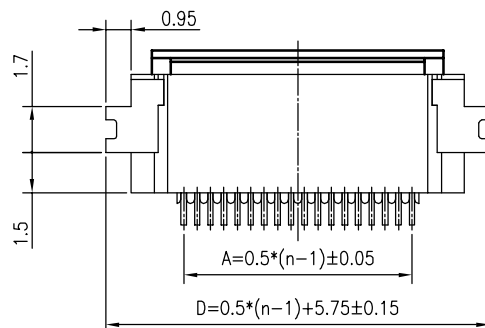
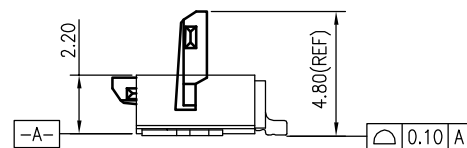
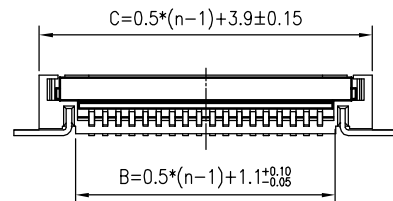
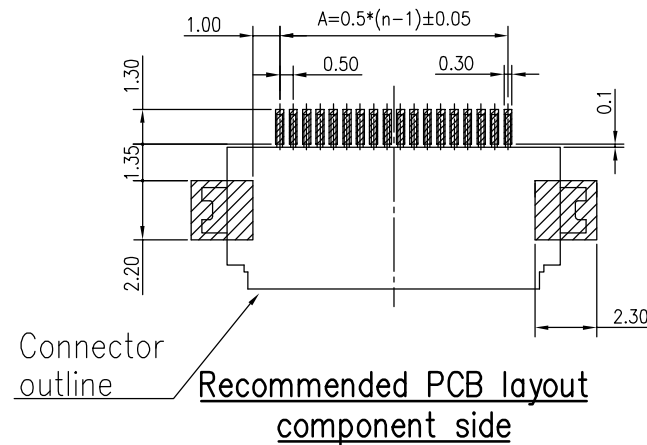


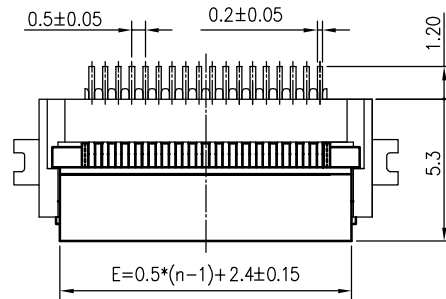

Applicable FPC/FFC  
recommended dimension

## MATERIAL

HOUSING: LCP, UL94V-0, COLOR: NATURAL.

COVER: LCP, UL94V-0, COLOR: BLACK.

CONTACT: PHOSPHOR BRONZE.

PLATING: ALL TIN, LEAD FREE, OR ALL GOLD.

HOLD DOWN: BRASS. PLATING: ALL TIN, LEAD FREE, OR ALL GOLD.

## ELECTRICAL

VOLTAGE: 50V MAX.

CURRENT: 0.4A MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC.

INSULATION RESISTANCE: 50 MEGAOHMS MIN.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

## ENVIRONMENTAL

TEMPERATURE RANGE: -20°C TO 85°C.

## FEATURE AND SPECIFICATIONS

SIZES 51 TO 80 PIN.

FOR 0.3mm THICKNESS FFC/FPC.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

FPV-WHB-xx-LF  
SERIES | | LEADFREE  
51~80WAY  
BOTTOM CONTACT  
HINGED ZIF  
90°SMT

DESCRIPTION: FFC/FPC 0.5 PITCH CONNECTOR, ZIF SMT TYPE, BODY HIGH 2.0 mm.

| Pin  | Part Number | Dimension |       |       |       |       | Pin  | Part Number | Dimension |       |       |       |       |
|------|-------------|-----------|-------|-------|-------|-------|------|-------------|-----------|-------|-------|-------|-------|
|      |             | A         | B     | C     | D     | E     |      |             | A         | B     | C     | D     | E     |
| 51   |             | 25.00     | 26.10 | 28.90 | 30.75 | 27.40 | 66   |             | 32.50     | 33.60 | 36.40 | 38.25 | 34.90 |
| 52   |             | 25.50     | 26.60 | 29.40 | 31.25 | 27.90 | 67   |             | 33.00     | 34.10 | 36.90 | 38.75 | 35.40 |
| 53   |             | 26.00     | 27.10 | 29.90 | 31.75 | 28.40 | 68   |             | 33.50     | 34.60 | 37.40 | 39.25 | 35.90 |
| * 54 |             | 26.50     | 27.60 | 30.40 | 32.25 | 28.90 | 69   |             | 34.00     | 35.10 | 37.90 | 39.75 | 36.40 |
| 55   |             | 27.00     | 28.10 | 30.90 | 32.75 | 29.40 | 70   |             | 34.50     | 35.60 | 38.40 | 40.25 | 36.90 |
| 56   |             | 27.50     | 28.60 | 31.40 | 33.25 | 29.90 | 71   |             | 35.00     | 36.10 | 38.90 | 40.75 | 37.40 |
| 57   |             | 28.00     | 29.10 | 31.90 | 33.75 | 30.40 | 72   |             | 35.50     | 36.60 | 39.40 | 41.25 | 37.90 |
| 58   |             | 28.50     | 29.60 | 32.40 | 34.25 | 30.90 | 73   |             | 36.00     | 37.10 | 39.90 | 41.75 | 38.40 |
| 59   |             | 29.00     | 30.10 | 32.90 | 34.75 | 31.40 | 74   |             | 36.50     | 37.60 | 40.40 | 42.25 | 38.90 |
| * 60 |             | 29.50     | 30.60 | 33.40 | 35.25 | 31.90 | 75   |             | 37.00     | 38.10 | 40.90 | 42.75 | 39.40 |
| 61   |             | 30.00     | 31.10 | 33.90 | 35.75 | 32.40 | 76   |             | 37.50     | 38.60 | 41.40 | 43.25 | 39.90 |
| * 62 |             | 30.50     | 31.60 | 34.40 | 36.25 | 32.90 | 77   |             | 38.00     | 39.10 | 41.90 | 43.75 | 40.40 |
| 63   |             | 31.00     | 32.10 | 34.90 | 36.75 | 33.40 | 78   |             | 38.50     | 39.60 | 42.40 | 44.25 | 40.90 |
| 64   |             | 31.50     | 32.60 | 35.40 | 37.25 | 33.90 | 79   |             | 39.00     | 40.10 | 42.90 | 44.75 | 41.40 |
| 65   |             | 32.00     | 33.10 | 35.90 | 37.75 | 34.40 | * 80 |             | 39.50     | 40.60 | 43.40 | 45.25 | 41.90 |

註：“\*”表示已開模規格

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

FPV-WHB-xx-LF  
SERIES | | LEADFREE  
51-80WAY  
BOTTOM CONTACT  
HINGED ZIF  
90°SMT

DESCRIPTION: FFC/FPC 0.5 PITCH CONNECTOR , ZIF SMT TYPE , BODY HIGH 2.0 mm.