
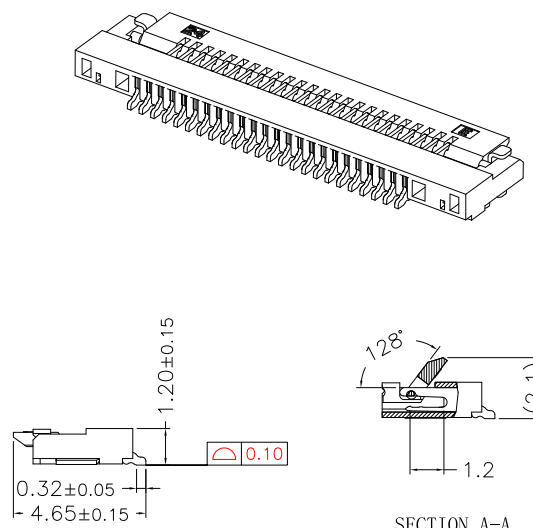
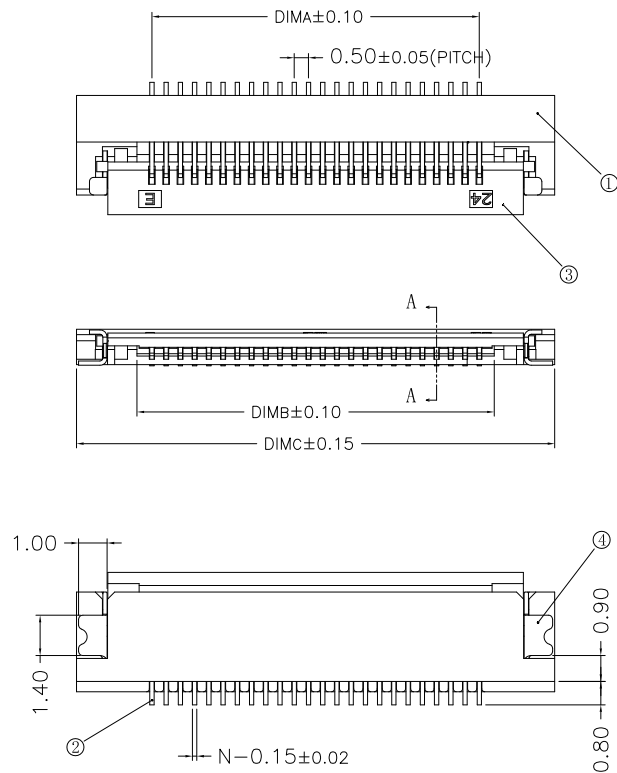


适用扁平线

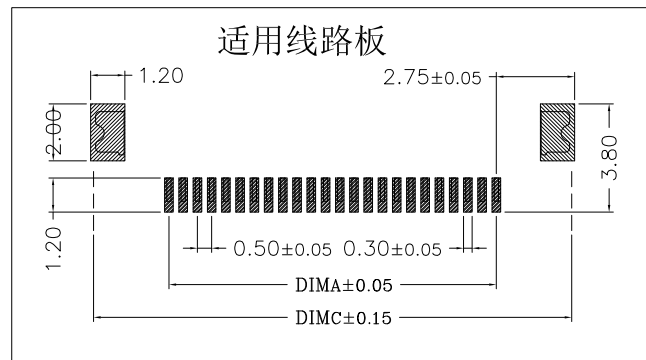

SPEC :

- Housing: High-Temp Plastic, UL94-V
Color: Nature (Lvory) (LCP)
- Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
- Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
- Solder Tab: BRASS (C2680)
- Temperature Rating: -25°C ~ +85°C
- Dielectric Withstanding Voltage: 500V AC/Min

CKT	DIMA	DIMB	DIMC	CKT	DIMA	DIMB	DIMC
4	1.50	2.55	6.80	33	16.00	17.05	21.30
5	2.00	3.05	7.30	34	16.50	17.55	21.80
6	2.50	3.55	7.80	35	17.00	18.05	22.30
7	3.00	4.05	8.30	36	17.50	18.55	22.80
8	3.50	4.55	8.80	37	18.00	19.05	23.30
9	4.00	5.05	9.30	38	18.50	19.55	23.80
10	4.50	5.55	9.80	39	19.00	20.05	24.30
11	5.00	6.05	10.30	40	19.50	20.55	24.80
12	5.50	6.55	10.80	41	20.00	21.05	25.30
13	6.00	7.05	11.30	42	20.50	21.55	25.80
14	6.50	7.55	11.80	43	21.00	22.05	26.30
15	7.00	8.05	12.30	44	21.50	22.55	26.80
16	7.50	8.55	12.80	45	22.00	23.05	27.30
17	8.00	9.05	13.30	46	22.50	23.55	27.80
18	8.50	9.55	13.80	47	23.00	24.05	28.30
19	9.00	10.05	14.30	48	23.50	24.55	28.80
20	9.50	10.55	14.80	49	24.00	25.05	29.30
21	10.00	11.05	15.30	50	24.50	25.55	29.80
22	10.50	11.55	15.80	51	25.00	26.05	30.30
23	11.00	12.05	16.30	52	25.50	26.55	30.80
24	11.50	12.55	16.80	53	26.00	27.05	31.30
25	12.00	13.05	17.30	54	26.50	27.55	31.80
26	12.50	13.55	17.80	55	27.00	28.05	32.30
27	13.00	14.05	18.30	56	27.50	28.55	32.80
28	13.50	14.55	18.80	57	28.00	29.05	33.30
29	14.00	15.05	19.30	58	28.50	29.55	33.80
30	14.50	15.55	19.80	59	29.00	30.05	34.30
31	15.00	16.05	20.30	60	29.50	30.55	34.80
32	15.50	16.55	20.80				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-WHB12-xx-LF

SERIES
LEADFREE
04~60WAY
HIGH 1.20mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION: 0.5PH 1.2H 掀蓋臥貼前插