

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPV-WHB22-xx-LF
SERIES | | | | LEADFREE
*04-60WAY
HIGH 2.24mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

NOTES:

1. HOUSING MATERIAL: HEAT RESISTANCE PLASTIC(UL94 V-0)
ACTUATOR MATERIAL: HEAT RESISTANCE PLASTIC(UL94 V-0)
2. TERMINAL MATERIAL: PHOSPHOR BRONZE C5210R-SH.
TIN PLATING (LEAD FREE)
3. FITTING NAIL MATERIAL: PHOSPHOR BRONZE C5191R-H.
TIN PLATING (LEAD FREE)
4. TERMINAL RETENTION FORCE: 400gf (MIN)
5. FPC CABLE RETENTION FORCE: NO. OF CONTACT*30gf(MIN)

P数	A	B	C	D	E
4	6.40	5.80	2.57	1.50	6.30
5	6.90	6.30	3.07	2.00	6.80
6	7.40	6.80	3.57	2.50	7.30
7	7.90	7.30	4.07	3.00	7.80
8	8.40	7.80	4.57	3.50	8.30
9	8.90	8.30	5.07	4.00	8.80
10	9.40	8.80	5.57	4.50	9.30
11	9.90	9.30	6.07	5.00	9.80
12	10.40	9.80	6.57	5.50	10.30
13	10.90	10.30	7.07	6.00	10.80
14	11.40	10.80	7.57	6.50	11.30
15	11.90	11.30	8.07	7.00	11.80
16	12.40	11.80	8.57	7.50	12.30
17	12.90	12.30	9.07	8.00	12.80
18	13.40	12.80	9.57	8.50	13.30
19	13.90	13.30	10.07	9.00	13.80
20	14.40	13.80	10.57	9.50	14.30
21	14.90	14.30	11.07	10.00	14.80
22	15.40	14.80	11.57	10.50	15.30
23	15.90	15.30	12.07	11.00	15.80
24	16.40	15.80	12.57	11.50	16.30
25	16.90	16.30	13.07	12.00	16.80
26	17.40	16.80	13.57	12.50	17.30
27	17.90	17.30	14.07	13.00	17.80
28	18.40	17.80	14.57	13.50	18.30
29	18.90	18.30	15.07	14.00	18.80
30	19.40	18.80	15.57	14.50	19.30
31	19.90	19.30	16.07	15.00	19.80
32	20.40	19.80	16.57	15.50	20.30
33	20.90	20.30	17.07	16.00	20.80
34	21.40	20.80	17.57	16.50	21.30
35	21.90	21.30	18.07	17.00	21.80
36	22.40	21.80	18.57	17.50	22.30
37	22.90	22.30	19.07	18.00	22.80
38	23.40	22.80	19.57	18.50	23.30
39	23.90	23.30	20.07	19.00	23.80
40	24.40	23.80	20.57	19.50	24.30
41	24.90	24.30	21.07	20.00	24.80
42	25.40	24.80	21.57	20.50	25.30
43	25.90	25.30	22.07	21.00	25.80
44	26.40	25.80	22.57	21.50	26.30
45	26.90	26.30	23.07	22.00	26.80
46	27.40	26.80	23.57	22.50	27.30
47	27.90	27.30	24.07	23.00	27.80
48	28.40	27.80	24.57	23.50	28.30
49	28.90	28.30	25.07	24.00	28.80
50	29.40	28.80	25.57	24.50	29.30
51	29.90	29.30	26.07	25.00	29.80
52	30.40	29.80	26.57	25.50	30.30
53	30.90	30.30	27.07	26.00	30.80
54	31.40	30.80	27.57	26.50	31.30
55	31.90	31.30	28.07	27.00	31.80
56	32.40	31.80	28.57	27.50	32.30
57	32.90	32.30	29.07	28.00	32.80
58	33.40	32.80	29.57	28.50	33.30
59	33.90	33.30	30.07	29.00	33.80
60	34.40	33.80	30.57	29.50	34.30

* *記號表示已開模

RoHS Compliant

TOLERANCES ARE




煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT/ mm	SCALE 1:1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

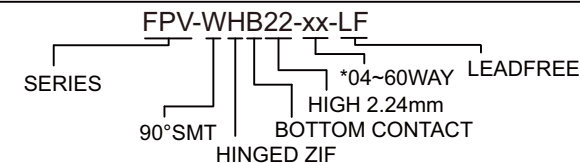

DESCRIPTION: