

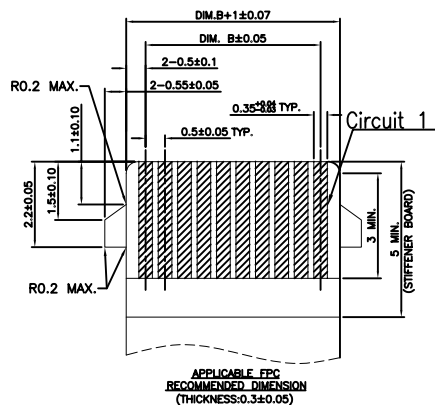
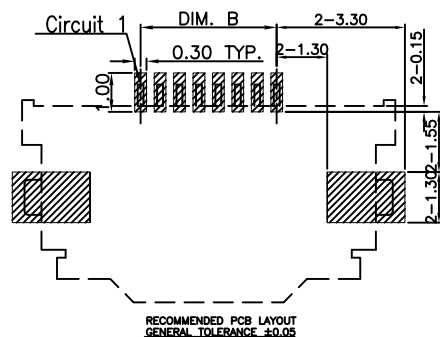
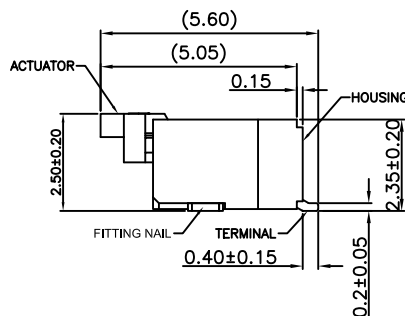




- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0;
 - ACTUATOR: THERMOPLASTIC, HIGH TEMP., UL94V-0;
 - CONTACT: COPPER ALLOY;
 - FITTING NAIL: COPPER ALLOY.
 - FINISH:
 - CONTACT:
 - 50u" MIN. NICKEL PLATING OVERALL;
 - N:100u" MIN. MATTE TIN PLATING OVERALL;
 - 1:GOLD FLASH PLATING OVERALL;
 - T:GOLD FLASH PLATING OVERALL, 10u" GOLD PLATING ON CONTACT AREA.
 - FITTING NAIL:
 - 50u" MIN. NICKEL PLATING OVERALL;
 - N:100u" MIN. MATTE TIN PLATING OVERALL;
 - 1:GOLD FLASH PLATING OVERALL;
 - T:100u" MIN. MATTE TIN PLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C

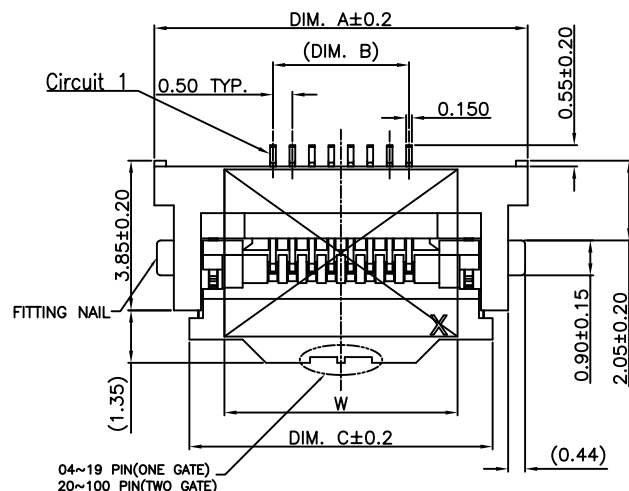

CKT	DIM A	DIM B	DIM C	DIM D	MYLAR W
005	8.10	2.00	6.30	3.08	6.00
006	8.60	2.50	6.80	3.58	6.00
008	9.60	3.50	7.80	4.58	6.00
010	10.60	4.50	8.80	5.58	6.00
012	11.60	5.50	9.80	6.58	6.00
013	12.10	6.00	10.30	7.08	6.00
015	13.10	7.00	11.30	8.08	6.00
020	15.60	9.50	13.80	10.58	12.00
040	25.60	19.50	23.80	20.58	16.00
050	30.60	24.50	28.80	25.58	16.00

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm 2^\circ$

PPOJECTION

照片框

ORDER INFORMATION

FPV-WHB25FKC-xx-LF

SERIES T T T T T LEADFREE

90°SMT 05~80WAY

HINGED ZIF MYLAR FPC LOCK

HIGH 2.5mm



BOTTOM CONTACT

DESCRIPTION: 0.5mm PITCH EASY ON FPC/FFC CO

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

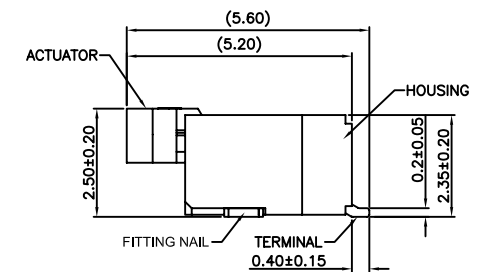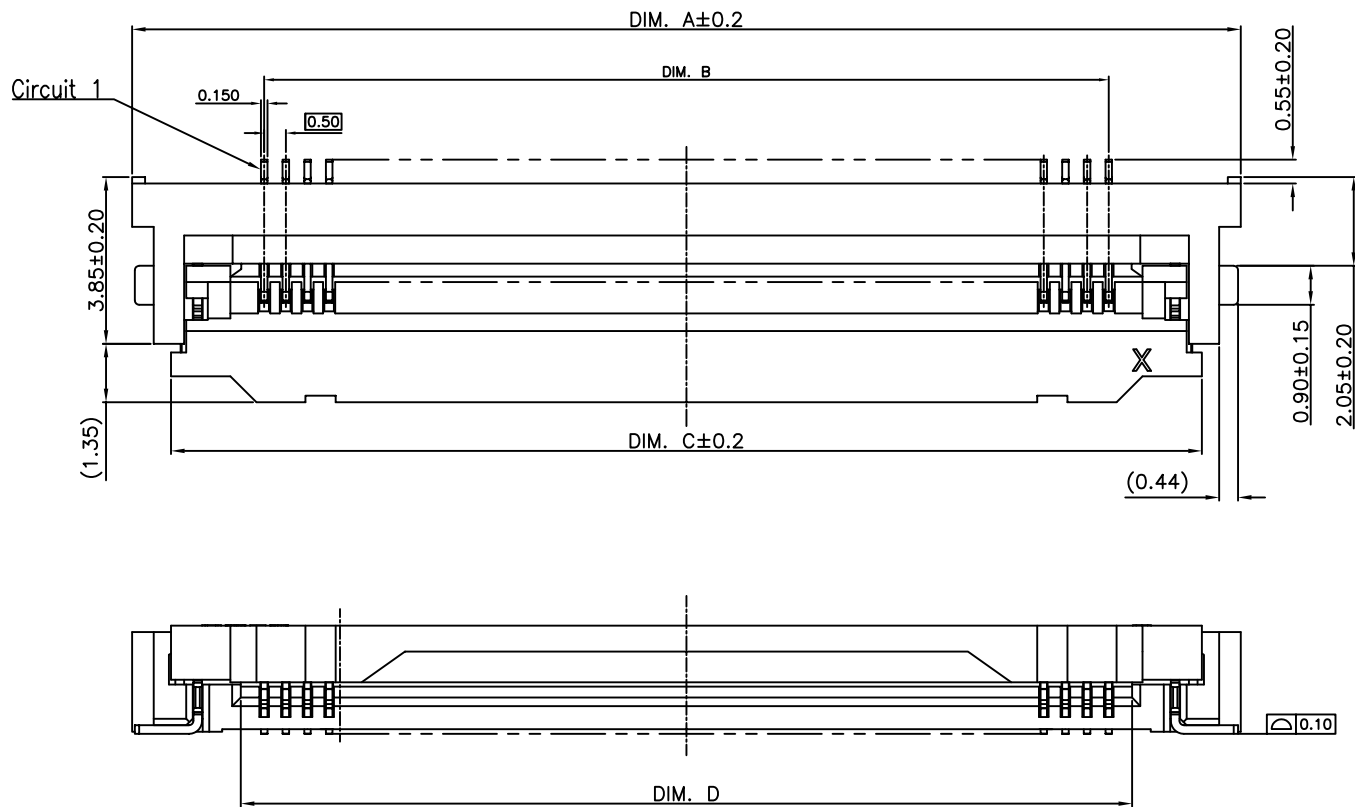

CKT	DIM A	DIM B	DIM C	DIM D	MYLAR W
060	35.60	29.50	33.80	30.58	16.00
064	37.60	31.50	35.80	32.58	16.00
068	39.60	33.50	37.80	34.58	16.00
080	45.60	39.50	43.80	40.58	20.00

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm 2^\circ$

PPOJECTION

照片框

ORDER INFORMATION

FPV-WHB25FKC-xx-LF

SERIES T T T T LEADFREE
90°SMT 05-80WAY
HINGED ZIF MYLAR
FPC LOCK
HIGH 2.5mm
BOTTOM CONTACT

DESCRIPTION: 0.5mm PITCH EASY ON FPC/FFC CO