
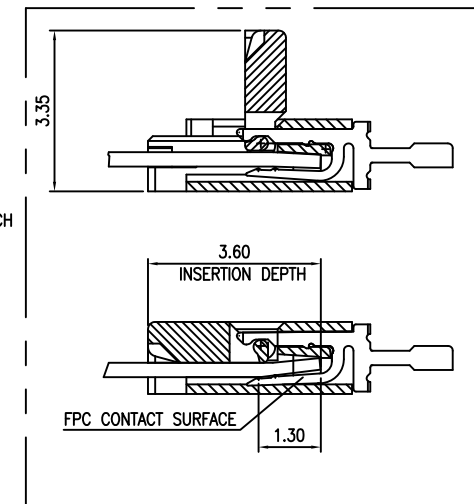



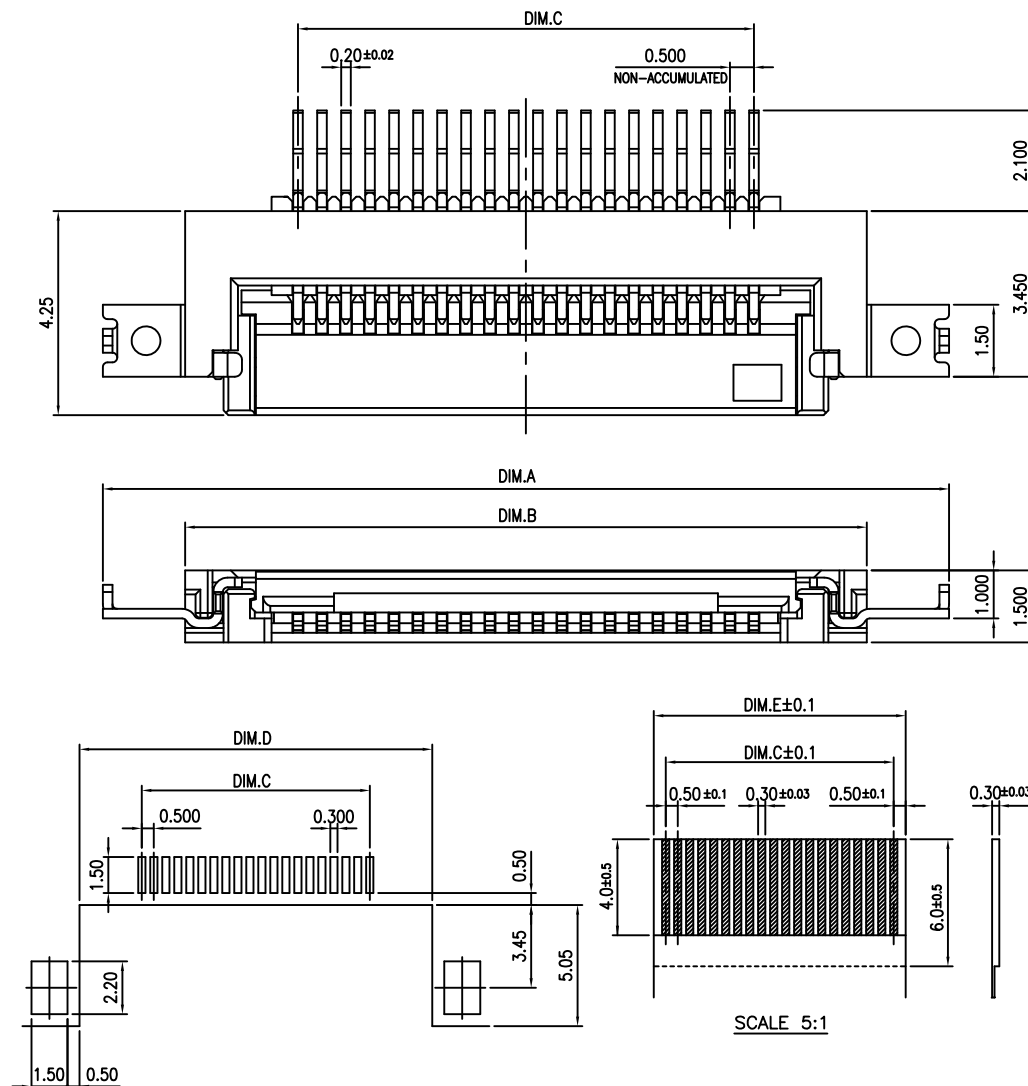

NOTES:

- UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
- MATERIAL OF COMPONENTS :
 INSULATORL.C.P.+30% GLASS REINFORCED
 SPACERNYLON 9T+33% GLASS REINFORCED
 CONTACTPHOSPHOR BRONZE C5191R-H
 HOLD DOWNBRASS C2680R-H
- GOLD FLASH PLATED ALL OVER 50u" MIN.
 UNDER-PLATED NICKEL

RECOMMENDED P.C. BOARD PATTERN LAYOUT
 SCALE 5 : 1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

FPV-WHBF10-xx-LF
 SERIES | | | LEADFREE
 | | | 04~40WAY
 | | | OFFSET 1.0mm
 | | | BOTTOM CONTACT
 | | | HINGED ZIF
 | | | 90°SMT

DESCRIPTION: FPC Connector, Middel Board Mount Pitch 0.5mm ,Thickness 1.5 mm