

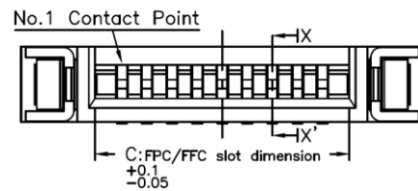


NOTE:



- 1.MATERIAL:
INSULATOR:THERMOPLASTIC
CONTACTS:BRASS
SOLDER PAD:BRASS
- 2.CONTACTS FINISH:TIN OVER NICKEL
SOLDER PAD FINISH:TIN OVER NICKEL
- 3.CURRENT RATING:0.4A MAX.
- 4.VOLTAGE RATING:50V MAX.
- 5.DIELECTRIC WITHSTANDING VOLTAGE:250Vrms.

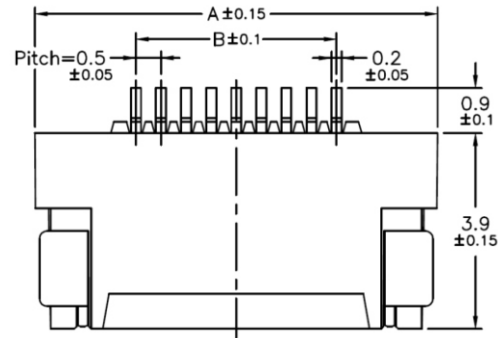


PCB Layout

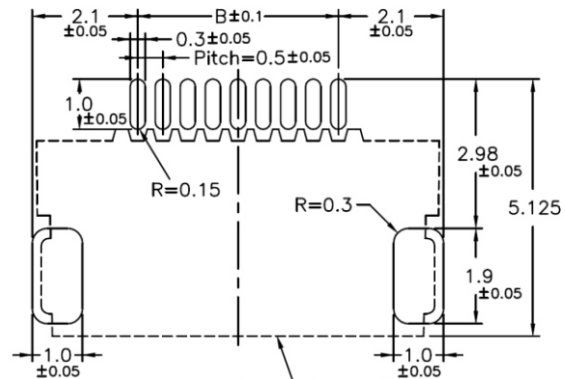

Connector
FPC/FFC INSERT DIRECTION

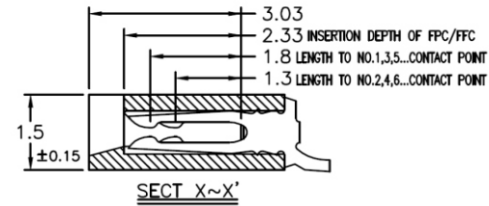

Applicable FPC

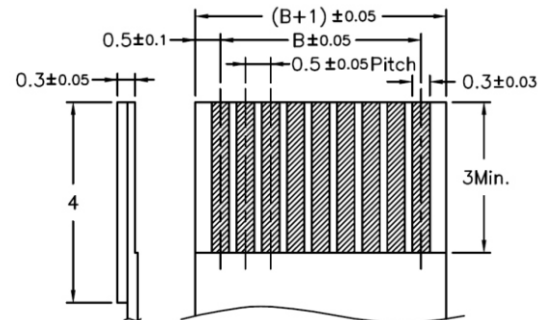

No. of Contacts	DIM. A	DIM. B	DIM. C
4	5.53	1.5	2.57
5	6.03	2	3.07
6	6.53	2.5	3.57
7	7.03	3	4.07
8	7.53	3.5	4.57
9	8.03	4	5.07
10	8.53	4.5	5.57
11	9.03	5	6.07
12	9.53	5.5	6.57
13	10.03	6	7.07
14	10.53	6.5	7.57
15	11.03	7	8.07
16	11.53	7.5	8.57
17	12.03	8	9.07
18	12.53	8.5	9.57
19	13.03	9	10.07
20	13.53	9.5	10.57
21	14.03	10	11.07
22	14.53	10.5	11.57
23	15.03	11	12.07
24	15.53	11.5	12.57
25	16.03	12	13.07
26	16.53	12.5	13.57
27	17.03	13	14.07
28	17.53	13.5	14.57
29	18.03	14	15.07
30	18.53	14.5	15.57
31	19.03	15	16.07
32	19.53	15.5	16.57
33	20.03	16	17.07
34	20.53	16.5	17.57
35	21.03	17	18.07
36	21.53	17.5	18.57
37	22.03	18	19.07
38	22.53	18.5	19.57
39	23.03	19	20.07
40	23.53	19.5	20.57
41	24.03	20	21.07
42	24.53	20.5	21.57
43	25.03	21	22.07
44	25.53	21.5	22.57
45	26.03	22	23.07
46	26.53	22.5	23.57
47	27.03	23	24.07
48	27.53	23.5	24.57
49	28.03	24	25.07
50	28.53	24.5	25.57
51	29.03	25	26.07
52	29.53	25.5	26.57
53	30.03	26	27.07
54	30.53	26.5	27.57
55	31.03	27	28.07
56	31.53	27.5	28.57
57	32.03	28	29.07
58	32.53	28.5	29.57
59	33.03	29	30.07
60	33.53	29.5	30.57

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-WL2E15-xx-LF

SERIES

90°SMT

LEADFREE

04~60 WAY

HIGH 1.5mm

EAR

DUAL CONTACT

NON ZIF

DESCRIPTION: