
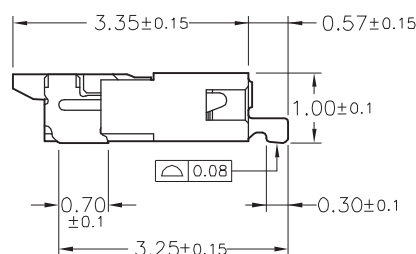
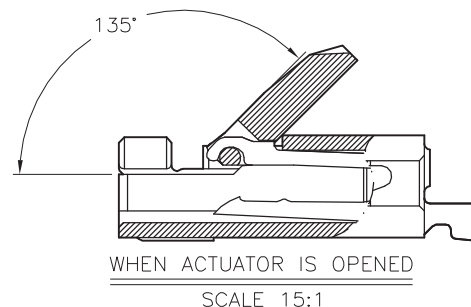
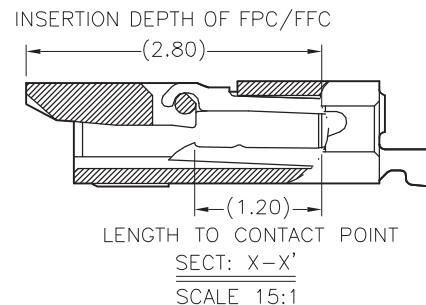
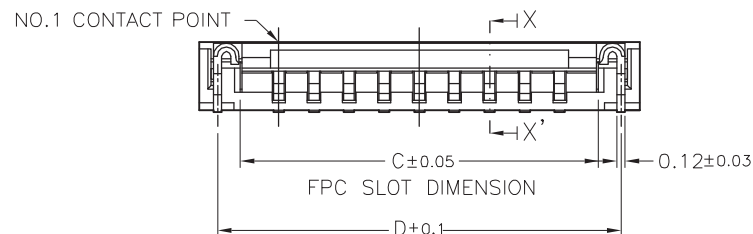


NOTE:

- 1.MATERIAL:
HOUSING:LCP(UL 94V-0)
ACTUATOR:LCP(UL 94V-0)
TERMINAL:PHOSPHOR BRONZE
STOPPER:PHOSPHOR BRONZE
- 2.PLATING:
TERMINAL:SEE ORDERING INFORMATION
STOPPER:TIN OVER NICKEL(LEAD FREE)
- 3.RATING:
OPERATING VOLTAGE:50V
CURRENT RATING:0.5A
OPERATING TEMPERATURE:-55°C ~ +85°C

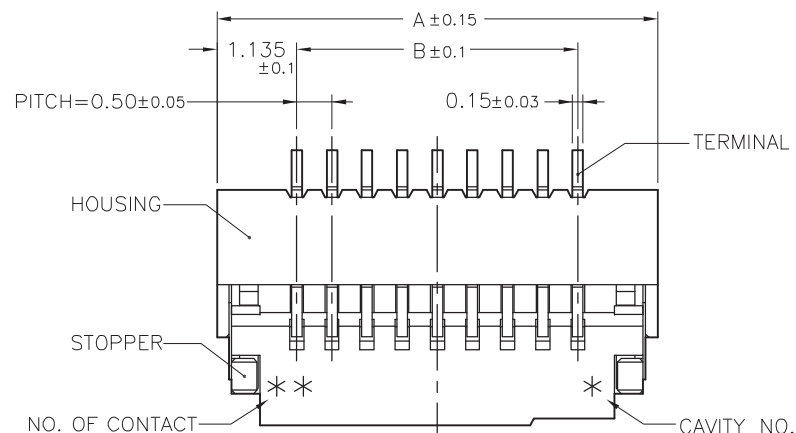

NO.OF CONTACTS	DIM. A	DIM. B	DIM. C	DIM. D
04	3.77	1.5	2.6	3.24
05	4.27	2.0	3.1	3.74
06	4.77	2.5	3.6	4.24
07	5.27	3.0	4.1	4.74
08	5.77	3.5	4.6	5.24
09	6.27	4.0	5.1	5.74
10	6.77	4.5	5.6	6.24
11	7.27	5.0	6.1	6.74
12	7.77	5.5	6.6	7.24
13	8.27	6.0	7.1	7.74
14	8.77	6.5	7.6	8.24
15	9.27	7.0	8.1	8.74
16	9.77	7.5	8.6	9.24
17	10.27	8.0	9.1	9.74
18	10.77	8.5	9.6	10.24
19	11.27	9.0	10.1	10.74
20	11.77	9.5	10.6	11.24
21	12.27	10.0	11.1	11.74
22	12.77	10.5	11.6	12.24
23	13.27	11.0	12.1	12.74
24	13.77	11.5	12.6	13.24
25	14.27	12.0	13.1	13.74
26	14.77	12.5	13.6	14.24
27	15.27	13.0	14.1	14.74
28	15.77	13.5	14.6	15.24
29	16.27	14.0	15.1	15.74
30	16.77	14.5	15.6	16.24
31	17.27	15.0	16.1	16.74
32	17.77	15.5	16.6	17.24
33	18.27	16.0	17.1	17.74
34	18.77	16.5	17.6	18.24
35	19.27	17.0	18.1	18.74
36	19.77	17.5	18.6	19.24
37	20.27	18.0	19.1	19.74
38	20.77	18.5	19.6	20.24
39	21.27	19.0	20.1	20.74
40	21.77	19.5	20.6	21.24
41	22.27	20.0	21.1	21.74
42	22.77	20.5	21.6	22.24
43	23.27	21.0	22.1	22.74
44	23.77	21.5	22.6	23.24
45	24.27	22.0	23.1	23.74
46	24.77	22.5	23.6	24.24
47	25.27	23.0	24.1	24.74
48	25.77	23.5	24.6	25.24
49	26.27	24.0	25.1	25.74
50	26.77	24.5	25.6	26.24

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

FPV-WRD10GF3R-xx-LF


SERIES REEL LEADFREE
04-50WAY

90°SMT
ROTARY ZIF
DUAL CONTACTS HIGH 1.0mm
CABLE t=0.3mm
GOLD


DESCRIPTION: 0.5mm PITCH FPC CONN. E/O (H=1.0)

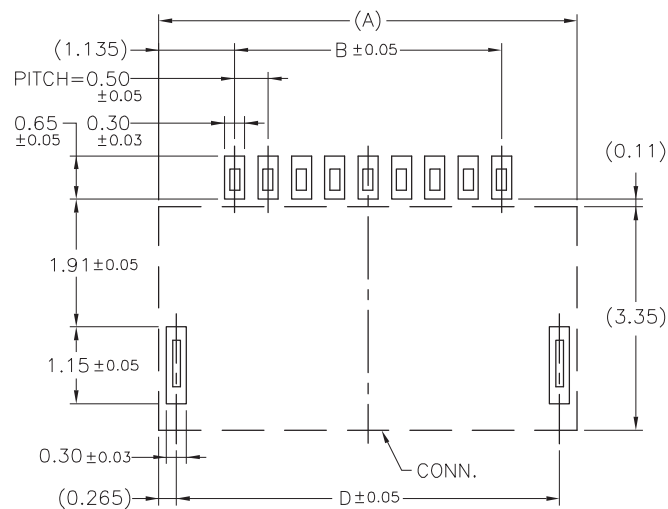

FPC/FFC INSERT DIRECTION
PCB LAYOUT

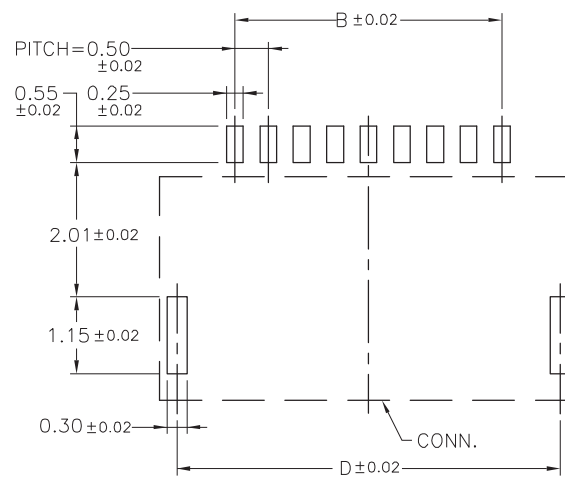

RECOMMENDED METAL MASK PATTERN(THICKNESS 0.1mm)

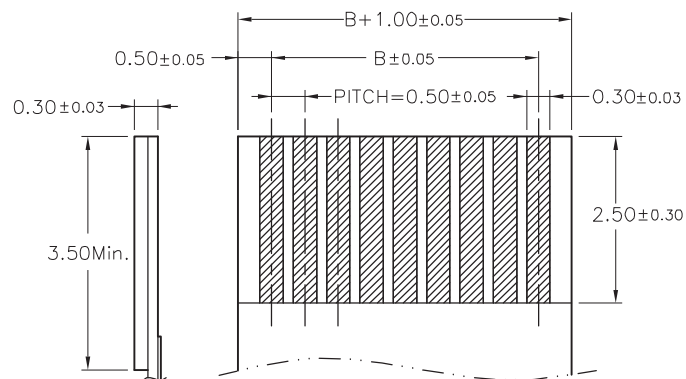

APPLICABLE FPC

NO.OF CONTACTS	DIM. A	DIM. B	DIM. D
04	3.77	1.5	3.24
05	4.27	2.0	3.74
06	4.77	2.5	4.24
07	5.27	3.0	4.74
08	5.77	3.5	5.24
09	6.27	4.0	5.74
10	6.77	4.5	6.24
11	7.27	5.0	6.74
12	7.77	5.5	7.24
13	8.27	6.0	7.74
14	8.77	6.5	8.24
15	9.27	7.0	8.74
16	9.77	7.5	9.24
17	10.27	8.0	9.74
18	10.77	8.5	10.24
19	11.27	9.0	10.74
20	11.77	9.5	11.24
21	12.27	10.0	11.74
22	12.77	10.5	12.24
23	13.27	11.0	12.74
24	13.77	11.5	13.24
25	14.27	12.0	13.74
26	14.77	12.5	14.24
27	15.27	13.0	14.74
28	15.77	13.5	15.24
29	16.27	14.0	15.74
30	16.77	14.5	16.24
31	17.27	15.0	16.74
32	17.77	15.5	17.24
33	18.27	16.0	17.74
34	18.77	16.5	18.24
35	19.27	17.0	18.74
36	19.77	17.5	19.24
37	20.27	18.0	19.74
38	20.77	18.5	20.24
39	21.27	19.0	20.74
40	21.77	19.5	21.24
41	22.27	20.0	21.74
42	22.77	20.5	22.24
43	23.27	21.0	22.74
44	23.77	21.5	23.24
45	24.27	22.0	23.74
46	24.77	22.5	24.24
47	25.27	23.0	24.74
48	25.77	23.5	25.24
49	26.27	24.0	25.74
50	26.77	24.5	26.24

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPV-WRD10GF3R-xx-LF


SERIES LEADFREE
04-50WAY

90°SMT REEL

ROTARY ZIF CABLE t=0.3mm



DUAL CONTACTS HIGH 1.0mm

DESCRIPTION: 0.5mm PITCH FPC CONN. E/O (H=1.0)

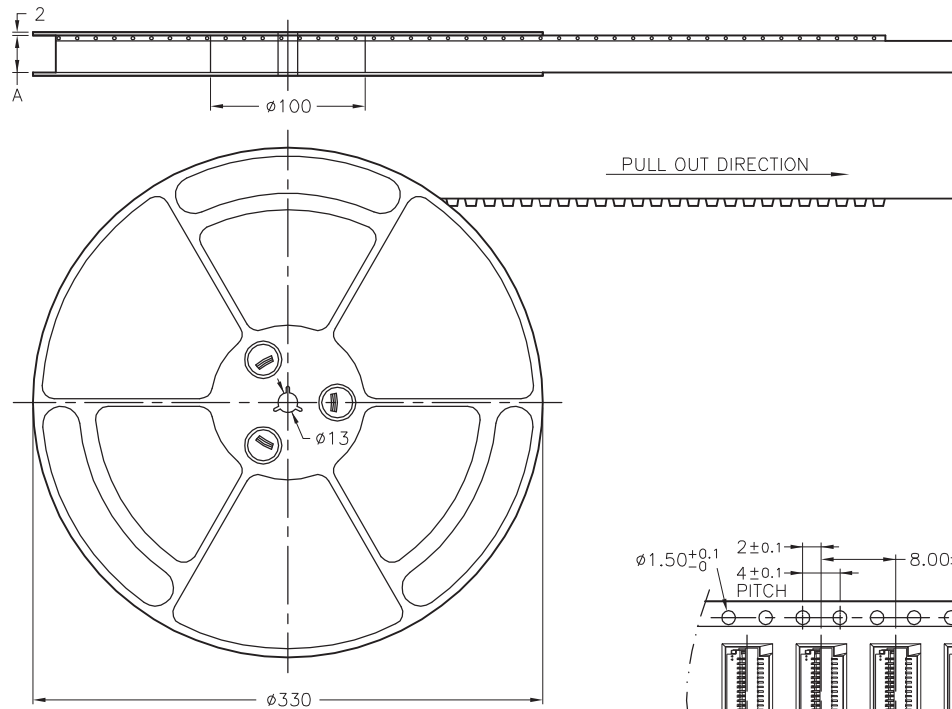

NOTE:

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2 .
- 2.CARRIER CAMBER IS WITHIN 1 mm IN 250mm.
- 3.MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY.
- 4.THICKNESS : 0.3 ± 0.05 mm.
- 5.COMPONENT LOAD PER 13" REEL : 5,000PCS.
- 6.FOR TAPE WIDTH (DIMENSION A) 12/16 AND 24mm A PILOT HOLE IS PROVIDED ON ONE SIDE.
FOR TAPE WIDTH (DIMENSION A) 32mm AND 44mm PILOT HOLES ARE PROVIDED ON BOTH SIDES.

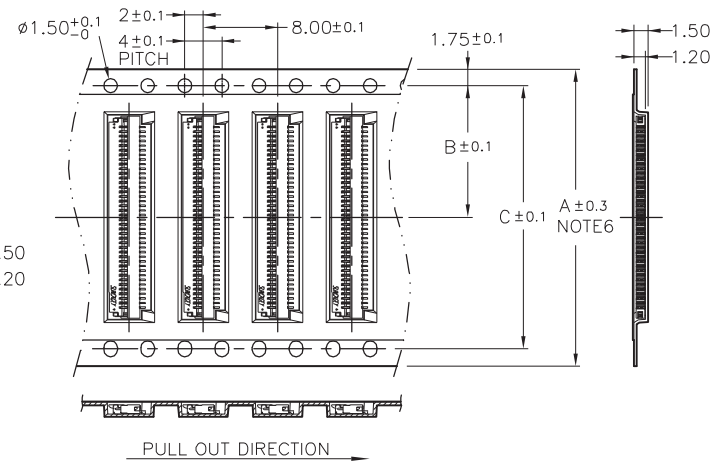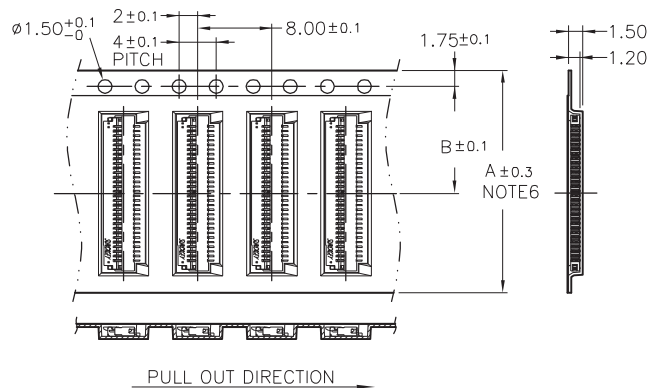

NOTE6

NO.OF CONTACTS	DIM. A	DIM. B	DIM. C
04 ↓ 08	12	5.5	—
09 ↓ 13	16	7.5	—
14 ↓ 30	24	11.5	—
31 ↓ 40	32	14.2	28.4
41 ↓ 50	44	20.2	40.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FPV-WRD10GF3R-xx-LF
SERIES
90°SMT
ROTARY ZIF
DUAL CONTACTS HIGH 1.0mm
LEADFREE
04-50WAY
REEL
CABLE t=0.3mm
GOLD

DESCRIPTION: 0.5mm PITCH FPC CONN. E/O (H=1.0)


紙板(上)
PASTEBOARD(UPPER)
(2)

塑膠袋
PLASTIC BAG
(4)

三角隔板
TRIANGLE PARTITION
(3)


紙板(下)
PASTEBOARD(LOWER)
(2)

外箱
CARTON
(1)

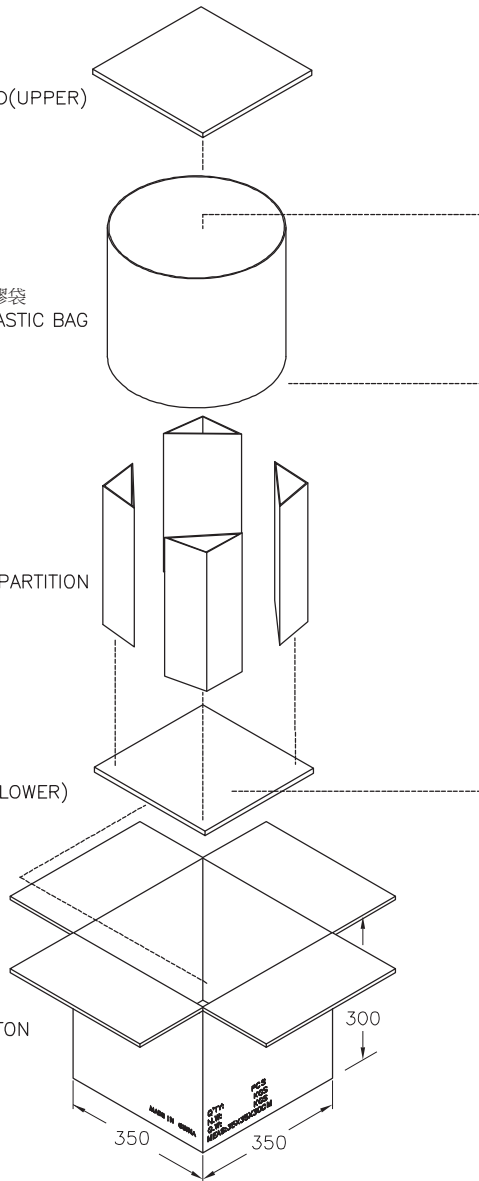

TAPE & REEL
(5)

氣泡袋
BUBBLE BAG
(6)



NO.OF CONTACTS	(1)外箱	(2)紙箱	(3)三角隔板	(4)塑膠袋	(5)塑膠圖盤	(6)氣泡袋
04 ↓ 08	1	2	4	1	10	10
09 ↓ 13					9	9
14 ↓ 30					7	7
31 ↓ 40					6	6
41 ↓ 50					5	5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPV-WRD10GF3R-xx-LF
SERIES
90°SMT
ROTARY ZIF
DUAL CONTACTS
LEADFREE
04-50WAY
REEL
CABLE t=0.3mm
GOLD
HIGH 1.0mm

DESCRIPTION: 0.5mm PITCH FPC CONN. E/O (H=1.0)