

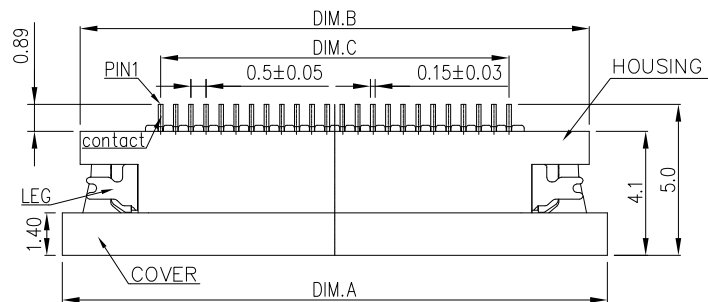



RECOMMENDED FFC
TOLERANCE: ± 0.05

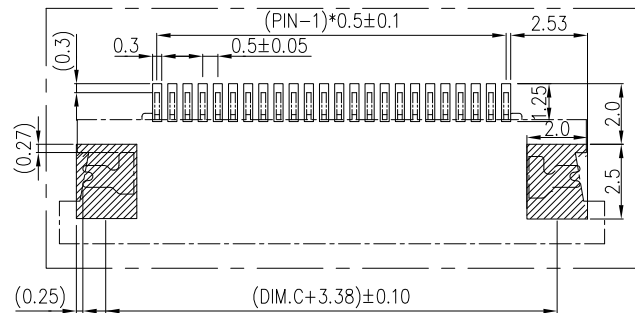

ALL SOLDER AREAS



RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

SPEC :

1. Housing: High-Temp Plastic, UL94V-0
Color: Nature (Ivory) (LCP)
2. Locker: High-Temp Plastic, UL94V-0
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
4. Solder Tab: BRASS (C2680)

PIN	DIM.A	DIM.B	DIM.C	DIM.D	PIN	DIM.A	DIM.B	DIM.C	DIM.D
4	8.00	6.80	1.50	2.58	33	22.50	21.30	16.00	17.08
5	8.50	7.30	2.00	3.08	34	23.00	21.80	16.50	17.58
6	9.00	7.80	2.50	3.58	35	23.50	22.30	17.00	18.08
7	9.50	8.30	3.00	4.08	36	24.00	22.80	17.50	18.58
8	10.00	8.80	3.50	4.58	37	24.50	23.30	18.00	19.08
9	10.50	9.30	4.00	5.08	38	25.00	23.80	18.50	19.58
10	11.00	9.80	4.50	5.58	39	25.50	24.30	19.00	20.08
11	11.50	10.30	5.00	6.08	40	26.00	24.80	19.50	20.58
12	12.00	10.80	5.50	6.58	41	26.50	25.30	20.00	21.08
13	12.50	11.30	6.00	7.08	42	27.00	25.80	20.50	21.58
14	13.00	11.80	6.50	7.58	43	27.50	26.30	21.00	22.08
15	13.50	12.30	7.00	8.08	44	28.00	26.80	21.50	22.58
16	14.00	12.80	7.50	8.58	45	28.50	27.30	22.00	23.08
17	14.50	13.30	8.00	9.08	46	29.00	27.80	22.50	23.58
18	15.00	13.80	8.50	9.58	47	29.50	28.30	23.00	24.08
19	15.50	14.30	9.00	10.08	48	30.00	28.80	23.50	24.58
20	16.00	14.80	9.50	10.58	49	30.50	29.30	24.00	25.08
21	16.50	15.30	10.00	11.08	50	31.00	29.80	24.50	25.58
22	17.00	15.80	10.50	11.58	51	31.50	30.30	25.00	26.08
23	17.50	16.30	11.00	12.08	52	32.00	30.80	25.50	26.58
24	18.00	16.80	11.50	12.58	53	32.50	31.30	26.00	27.08
25	18.50	17.30	12.00	13.08	54	33.00	31.80	26.50	27.58
26	19.00	17.80	12.50	13.58	55	33.50	32.30	27.00	28.08
27	19.50	18.30	13.00	14.08	56	34.00	32.80	27.50	28.58
28	20.00	18.80	13.50	14.58	57	34.50	33.30	28.00	29.08
29	20.50	19.30	14.00	15.08	58	35.00	33.80	28.50	29.58
30	21.00	19.80	14.50	15.58	59	35.50	34.30	29.00	30.08
31	21.50	20.30	15.00	16.08	60	36.00	34.80	29.50	30.58
32	22.00	20.80	15.50	16.58					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$


照片框

ORDER INFORMATION



FPV-WZB12GR-xx-LF
SERIES
90°SMT
ZIF
LEADFREE
04~60WAY
REEL
GOLD
HIGH 1.2mm
BOTTOM/CONTACT

DESCRIPTION: 0.5PH 1.2H 抽屜臥貼下接


PULL OUT DIRECTION

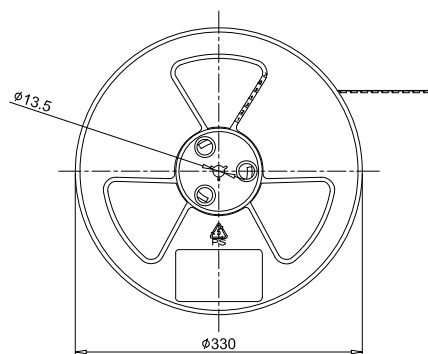

SCALE 3:20

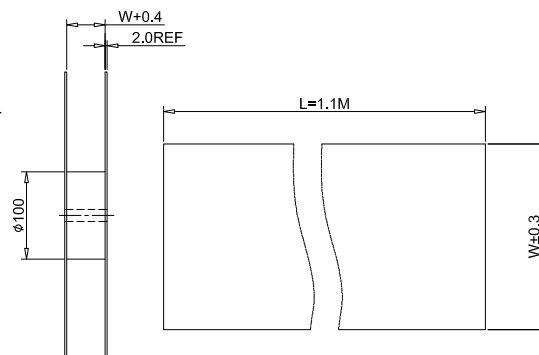

PULL OUT DIRECTION

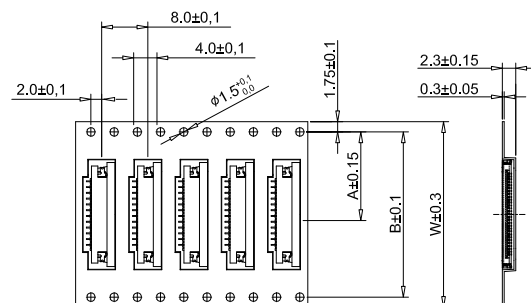

PULL OUT DIRECTION

PIN NO.	W	A	B	A0	B0	PCS /REEL
4PIN~8PIN	16	7.5	—	6.4+	5.5	2000
9PIN~24PIN	24	11.5	—	(n-4)*0.5	5.5	2000
25PIN~36PIN	32	14.2	28.4	(n=pin no)	5.5	2000
37PIN~55PIN	44	20.2	40.4		5.5	2000
56PIN~60PIN	56	26.2	52.4		5.5	2000

UPPER EPS (1PCS) (保利龍板) ①

③ DESICCANT(2PCS) (3G/PCS) (干燥剂)

NUMBER REEL (盤數)

PE BAG(1PCS) ② (PE防水袋)

AIR BLADDER BAG ④ (氣泡袋, 每膠盤用1PCS)

RIVET MAST (4PCS) ⑤ (折疊板)

CARTON (1PCS) (紙箱) ⑥

GP LABEL ⑦ (環保標籤) (1PCS)

DOWN EPS (1PCS) (下保利龍板) ⑨

LABLE (標籤) (1PCS) ⑧

NOTES:

- 1.CARTON SPEC.: 350*350*350mm(OUT DIM), PAPER THICKNESS=5mm
- 2.UPPER AND DOWN EPS: 350*350mm THICKNESS=8mm.
- 3.THE COVER TAPE PEELING FORCE: 30~100g.
- 4.PER REEL CASED ONE AIR BLADDER BAG.
- 5.CARRIER TAPE COLIR: BLACK.
- 6.CONNENGE ANG ENDED 200mm(200PCS) DON'T PUT IN PRODUCE.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPV-WZB12GR-xx-LF
SERIES
90°SMT
ZIF
REEL
GOLD
HIGH 1.2mm
LEADFREE
04~60WAY
BOTTOM/CONTACT

DESCRIPTION: 0.5PH 1.2H 抽屜臥貼上下接