

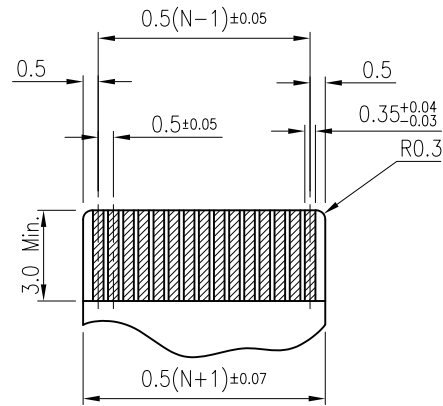
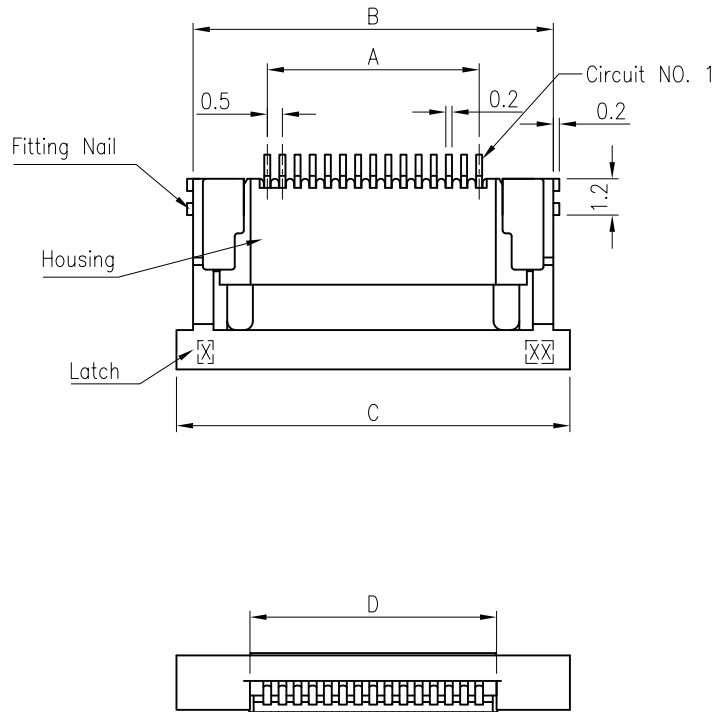
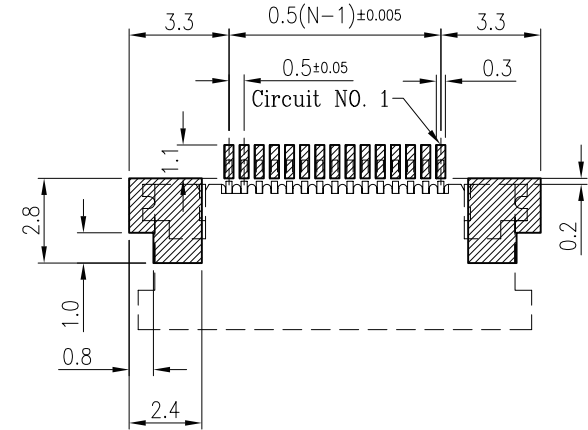


NOTES:

1.MATERIAL:
HOUSING:NYLON UL94V-0
LATCH:PPS UL94V-0
TERMINAL:PHOSPER BRONZE
FITTING NAIL:PHOSPER BRONZE

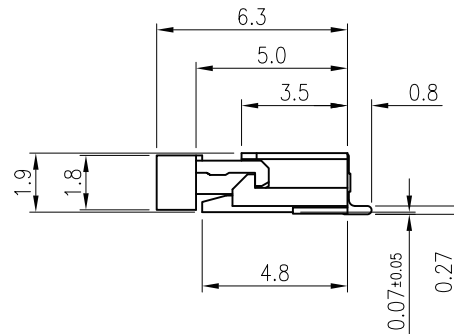

RECOMMENDED APPLICABLE FPC LAYOUT
(THICKNESS:0.3±0.03)

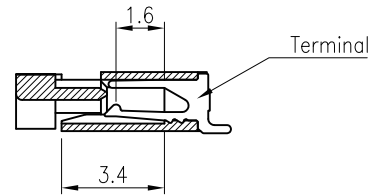

PC BOARD LAYOUT

CKT	DIM A	DIM B	DIM C	DIM D	CKT	DIM A	DIM B	DIM C	DIM D
4	1.5	6.4	7.5	2.65	35	7.0	21.9	23.0	18.15
5	2.0	6.9	8.0	3.15	36	7.5	22.4	23.5	18.65
6	2.5	7.4	8.5	3.65	37	8.0	22.9	24.0	19.15
7	3.0	7.9	9.0	4.15	38	8.5	23.4	24.5	19.65
8	3.5	8.4	9.5	4.65	39	9.0	23.9	25.0	20.15
9	4.0	8.9	10.0	5.15	40	9.5	24.4	25.5	20.65
10	4.5	9.4	10.5	5.65	41	20.0	24.9	26.0	21.15
11	5.0	9.9	11.0	6.15	42	20.5	25.4	26.5	21.65
12	5.5	10.4	11.5	6.65	43	21.0	25.9	27.0	22.15
13	6.0	10.9	12.0	7.15	44	21.5	26.4	27.5	22.65
14	6.5	11.4	12.5	7.65	45	22.0	26.9	28.0	23.15
15	7.0	11.9	13.0	8.15	46	22.5	27.4	28.5	23.65
16	7.5	12.4	13.5	8.65	47	23.0	27.9	29.0	24.15
17	8.0	12.9	14.0	9.15	48	23.5	28.4	29.5	24.65
18	8.5	13.4	14.5	9.65	49	24.0	28.9	30.0	25.15
19	9.0	13.9	15.0	10.15	50	24.5	29.4	30.5	25.65
20	9.5	14.4	15.5	10.65	51	25.0	29.9	31.0	26.15
21	10.0	14.9	16.0	11.15	52	25.5	30.4	31.5	26.65
22	10.5	15.4	16.5	11.65	53	26.0	30.9	32.0	27.15
23	11.0	15.9	17.0	12.15	54	26.5	31.4	32.5	27.65
24	11.5	15.4	17.5	12.65	55	27.0	31.9	33.0	28.15
25	12.0	15.9	18.0	13.15	56	27.5	32.4	33.5	28.65
26	12.5	17.4	18.5	13.65	57	28.0	32.9	34.0	29.15
27	13.0	17.9	19.0	14.15	58	28.5	33.4	34.5	29.65
28	13.5	18.4	19.5	14.65	59	29.0	33.9	35.0	30.15
29	14.0	18.9	20.0	15.15	60	29.5	34.4	35.5	30.65
30	14.5	19.4	20.5	15.65	61	30.0	34.9	36.0	31.15
31	15.0	19.9	21.0	16.15	62	30.5	35.4	36.5	31.65
32	15.5	20.4	21.5	16.65	63	31.0	35.9	37.0	32.15
33	16.0	20.9	22.0	17.15	64	31.5	36.4	37.5	32.65
34	16.5	21.4	22.5	17.65	65	32.0	36.9	38.0	33.15

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框


ORDER INFORMATION

FPV-WZB19R-xx-LF

SERIES
90°SMT
ZIF
HIGH 1.9mm
BOTTOM/CONTACT
04~65WAY
LEADFREE
REEL

DESCRIPTION: 0.5 mm SMT R/A FPC CONN. BOTTOM CONTACT TYPE

CKT.	DIM A	DIM B	DIM C	DIM D
5	3.5	8.3	16	16.4
6	4.0	8.8		
7	4.5	9.3		
8	5.0	9.8		
9	5.5	10.3		
10	6.0	10.8	24	24.4
11	6.5	11.3		
12	7.0	11.8		
13	7.5	12.3		
14	8.0	12.8		
15	8.5	13.3		
16	9.0	13.8		
17	9.5	14.3		
18	10.0	14.8		
19	10.5	15.3		
20	11.0	15.8		
21	11.5	16.3		
22	12.0	16.8		
23	12.5	17.3		

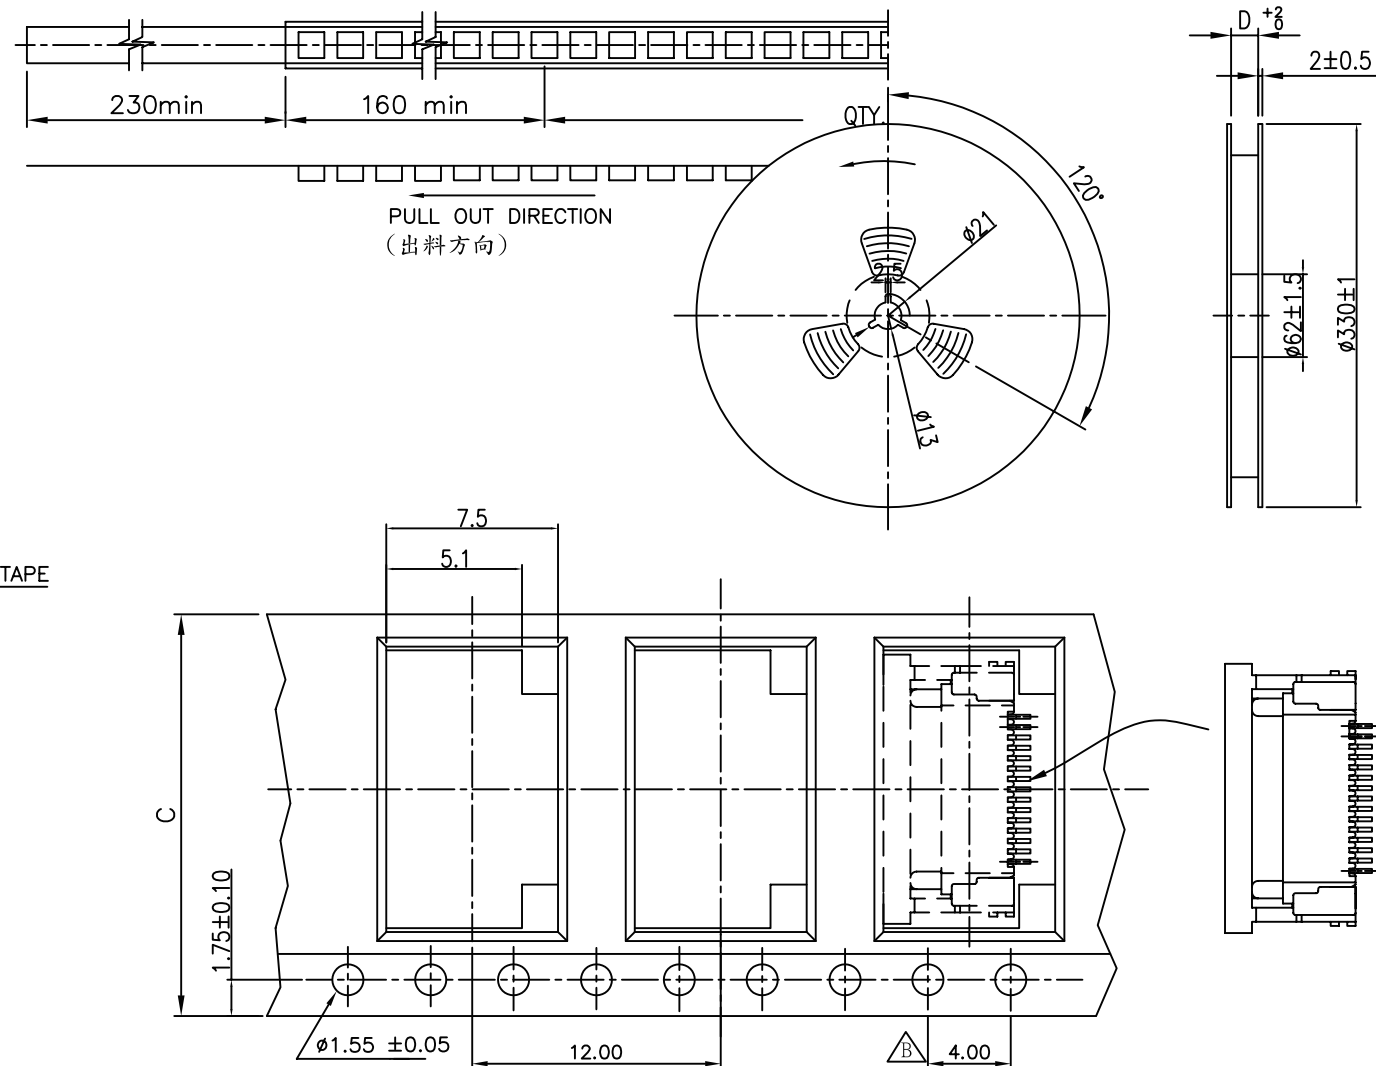

NOTES:

- 1.NUMBER OF CONNECTOR: 2000 PCS/REEL
- 2.MATERIAL:
CARRIER TAPE:BLACK CONDUCTIVE POLYSTYRENE A10Y
TOP TAPE: PET .PE .PEF
REEL: CARD BOARD

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

PPOJECTION


照片框

ORDER INFORMATION

FPV-WZB19R-xx-LF

SERIES
90°SMT
ZIF
HIGH 1.9mm
BOTTOM/CONTACT
04~65WAY
LEADFREE
REEL

DESCRIPTION:

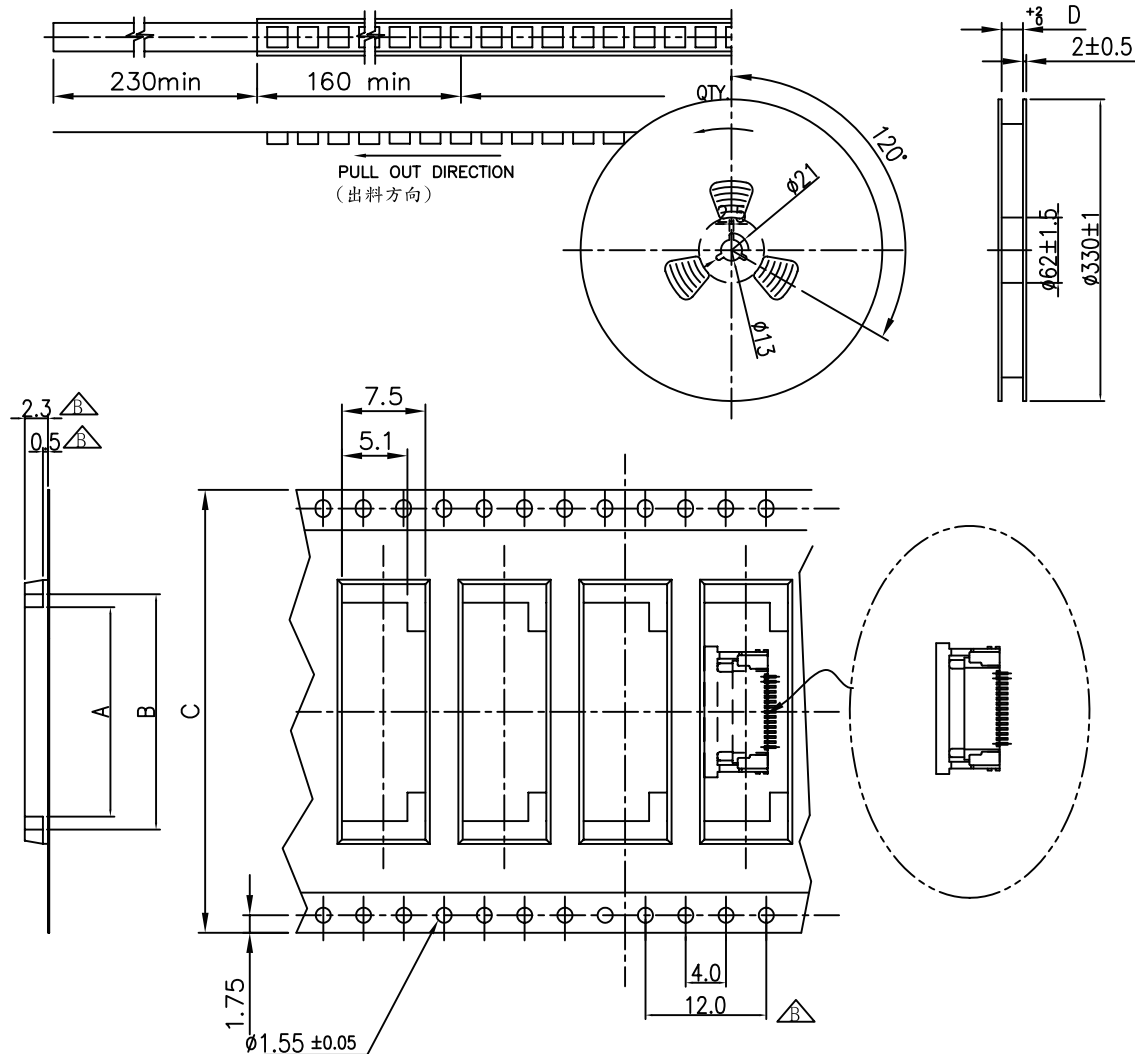

NOTES:

1.NUMBER OF CONNECTOR: 2000 PCS/REEL

2.MATERIAL:

CARRIER TAPE:BLACK CONDUCTIVE POLYSTYRENE A10Y

TOP TAPE: PET .PE .PEF

REEL: CARD BOARD

CKT.	DIM A	DIM B	DIM C	DIM D
24	13.0	17.8	32	32.4
25	13.5	18.3		
26	14.0	18.8		
27	14.5	19.3		
28	15.0	19.8		
29	15.5	20.3		
30	16.0	20.8		
31	16.5	21.3		
32	17.0	21.8	44	44.4
33	17.5	22.3		
34	18.0	22.8		
35	18.5	23.3		
36	19.0	23.8		
37	19.5	24.3		
38	20.0	24.8		
39	20.5	25.3		
40	21.0	25.8		
41	21.5	26.3		
42	22.0	26.8		
43	22.5	27.3		
44	23.0	27.8		
45	23.5	28.3		
46	24.0	28.8		
47	24.5	29.3		
48	25.0	29.8		
49	25.5	30.3		
50	26.0	30.8		
51	26.5	31.3		
52	27.0	31.8		
53	27.5	32.3		
54	28.0	32.8		
55	28.5	33.3		
56	29.0	33.8		
57	29.5	34.3		
58	30.0	34.8	56	56.4
59	30.5	35.3		
60	31.0	35.8		
61	31.5	36.3		
62	32.0	36.8		
63	32.5	37.3		
64	33.0	37.8		
65	33.5	38.3		

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10


ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

FPV-WZB19R-xx-LF



DESCRIPTION: