
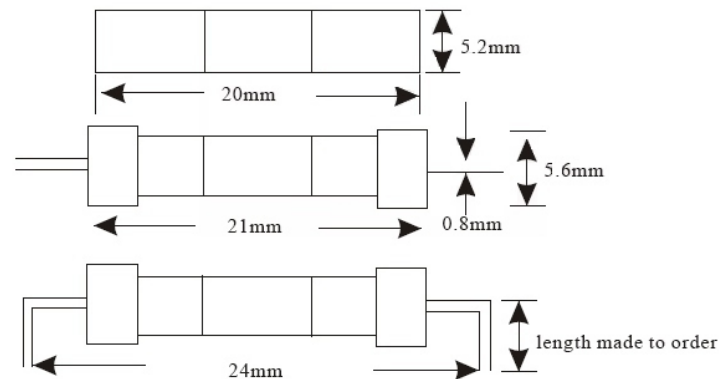
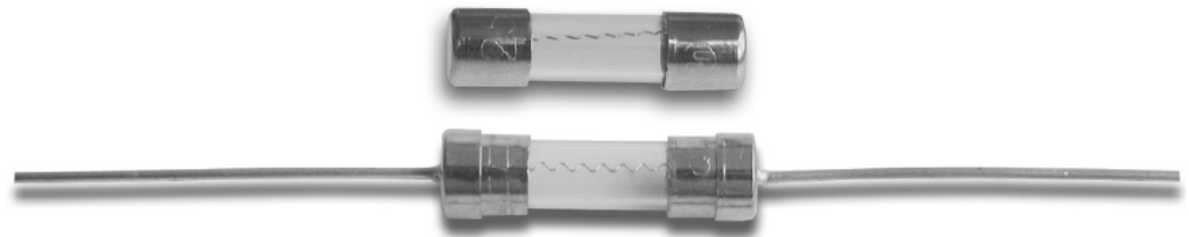


Miniature Glass Fuse 5x20mm Fast Blow (Quick Acting) F-125V/250V

pluggable into miniature fuse-holder or directly
mountable on printed circuit boards

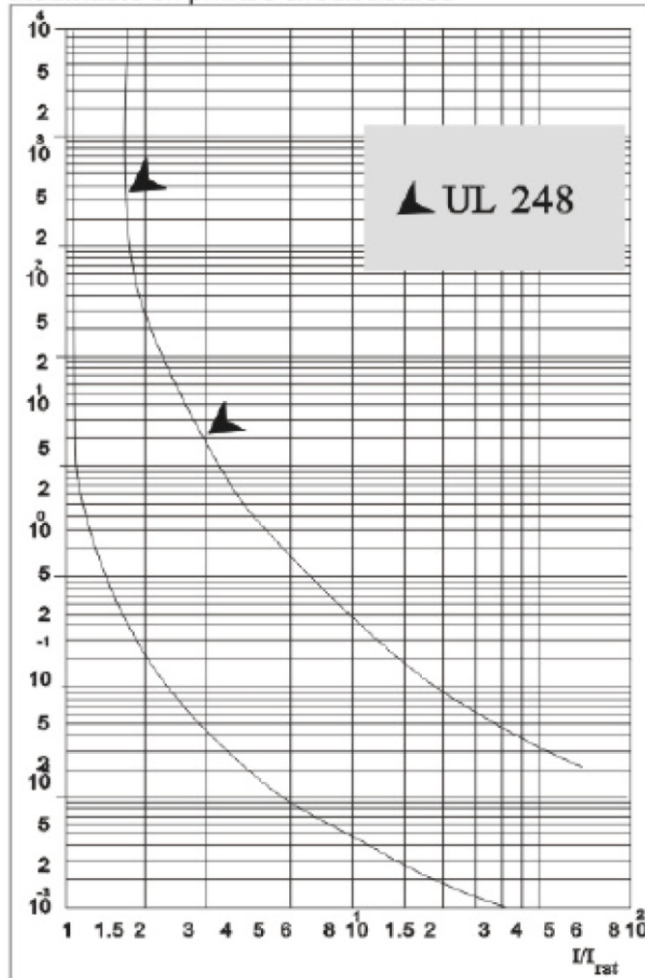

Time current characteristics

$n \times I_n$	$1.1 \times I_n$	$1.35 \times I_n$	$2.0 \times I_n$
Rat. current I_n	min.	max.	max.
100mA-10A	4h	1h	120s

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

FSG-5X20-xxx-LF

SERIES

5.2X2.0mm

LEADFREE

0.1A:100mA
0.12A:125mA
1A:1A
10A:10A

DESCRIPTION:

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV	Fusing I ² t at 10xI _n A ² s	BREAKING CAPACITY	APPROVAL
								CSA UL
			100mA		6000	0.0011		• •
			125mA		5400	0.0027		• •
			150mA		1900	0.0038		• •
			160mA		4800	0.0069		• •
			200mA		4000	0.011		• •
			250mA		3700	0.011		• •
			300mA	125V/250V	3400	0.02	125Vac	• •
			315mA	125V/250V	700	0.038	10KA	• •
			400mA		650	0.11	250Vac	• •
			500mA		600	0.19	200A	• •
			600mA		500	0.38		• •
			800mA		450	0.45		• •
			1 A		470	1.0		• •
			1.25 A		450	1.8		• •
			1.5 A		400	3.0		• •
			1.6 A		390	3.5		• •
			1.8 A		385	4.5		• •
			2 A		380	6.3		• •
			2.5 A		360	11		• •
			3 A		340	20		• •
			3.15 A		335	25		• •
			4 A		320	38		• •
			5 A		300	63		• •
			6 A		290	100		• •
			7 A		280	150		• •
			8 A		270	300		• •
			10 A		260	350		• •

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FSG-5X20-xxx-LF

SERIES

5.2X2.0mm

LEADFREE

0.1A:100mA
0.12A:125mA

1A:1A
10A:10A

DESCRIPTION: