


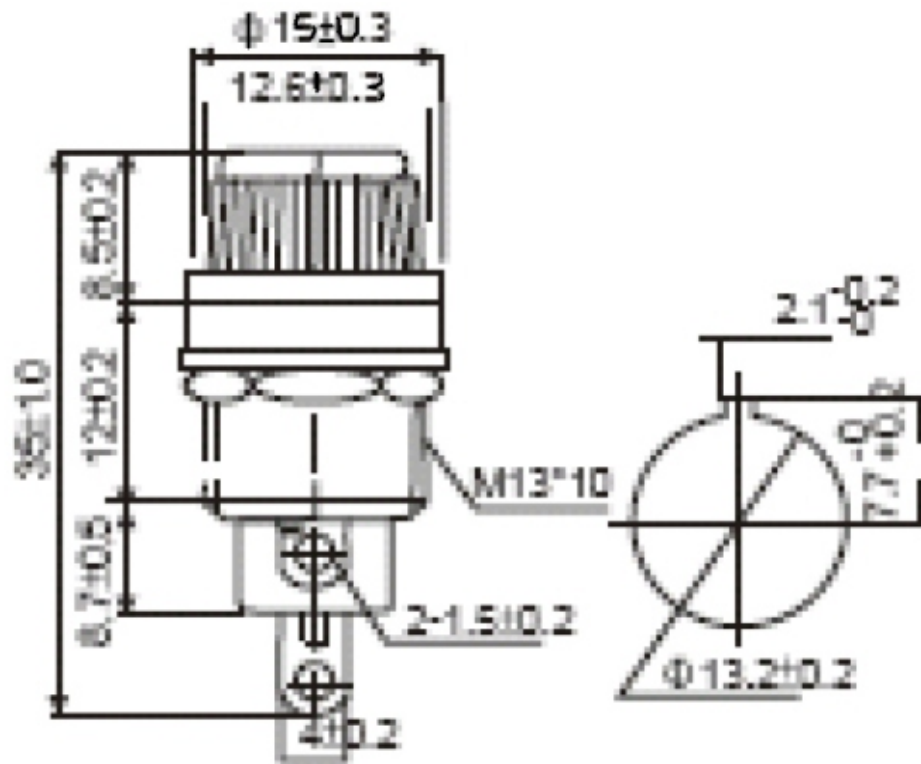

SPECIFICATIONS:

1. **Electrical:** Rated at 10A 250V AC
2. **Insulating Body:** Bakelite
3. **Knob:** Finger-grip fuse extractor type with nickel-plated copper alloy insert.
4. **Terminals:** Nickel-plated copper alloy, solder type.

UNIT	MILLIMETER
TOLERANCE	INSIDE +/- 0.5m/m
DESCRIPTION	FUSEHOLDER 5.2X20MM
DESIGNED BY	STEVE YANG
DRAWN BY	DORIS TSAI

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FSH-SPA35-5X20-LF
SERIES | LEADFREE
5.2X20mm/FUSE
HIGH 35mm
PANEL FRONT
SOLDER

DESCRIPTION: