


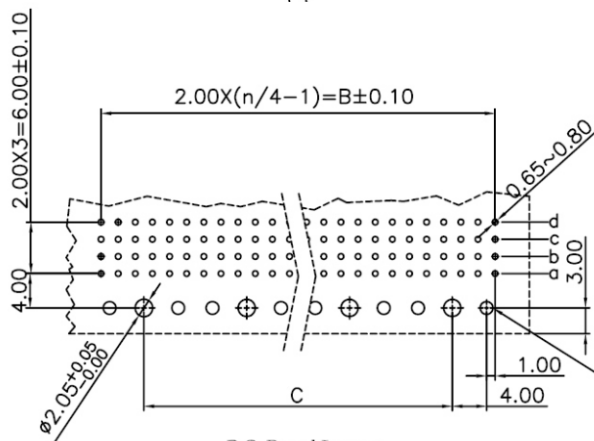
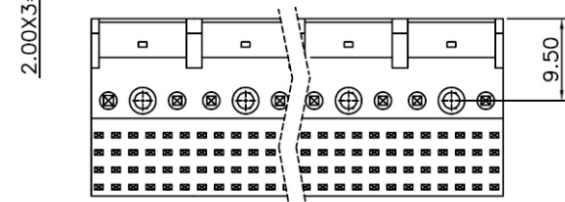
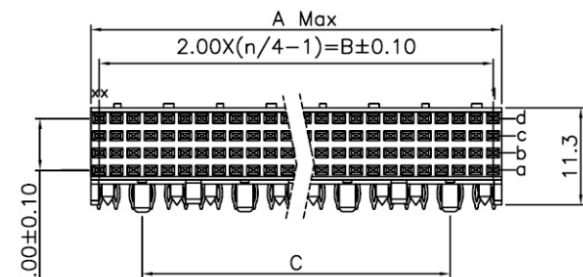


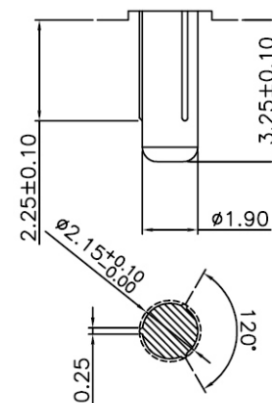

P.C. Board Layout

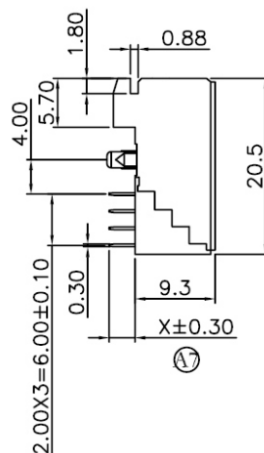

Detail J
(Scale 5:1)

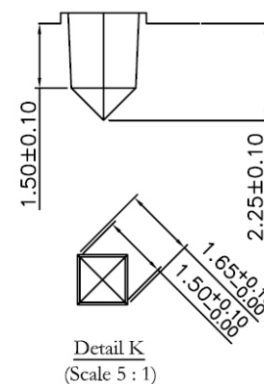

Detail K
(Scale 5:1)


Material:

Housing: High Temperature Plastic UL94V-0
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -65°C~+125°C.

*RoHS Compliant

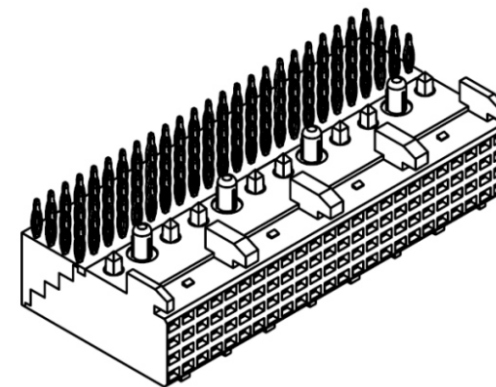

Position (n)	Dimension		
	A	B	C
24	11.95	10.0	0
48	23.95	22.0	12.0
72	35.95	34.0	24.0
96	47.95	46.0	36.0
120	59.95	58.0	48.0
144	71.95	70.0	60.0
168	83.95	82.0	72.0
192	95.95	94.0	84.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

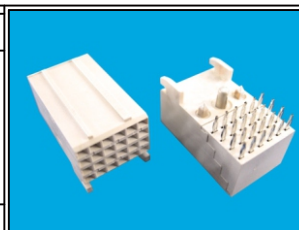

ORDER INFORMATION

FUB-SQxx-4Xxx-LF
SERIES LEADFREE
4X06:24WAY
4X48:192WAY
02:2.90mm
03:3.53mm
90°PRESS FIT
FEMALE

DESCRIPTION: