
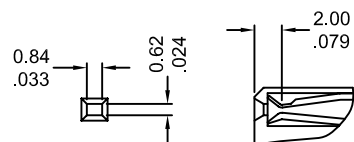


FEATURES:



- . Housing: Glass Filled LCP, UL 94V-0
- . Contact: Phosphor Bronze
- . Packaging: Tray
- . Tulip-shaped dual-beam contact provides high normal force and low insertion force
- . Selective Gold plated in terminal contact area
- . Integral terminal guide plate for true PCB positioning
- . Press-fit PCB retention pegs
- . High-temperature material withstands wave soldering
- . Polarizing key posts and guide walls

SPECIFICATIONS:


- . Current rating: 1.0A
- . Voltage rating: 100V
- . Temperature range: -55°C ~+ 125°C
- . Contact resistance: A Row 25mΩ max.
B Row 35mΩ max.
C Row 40mΩ max.
D Row 45mΩ max.
E Row 50mΩ max.
- . Insulation resistance: 1000mΩ min.
- . Dielectric withstanding voltage: 750V AC

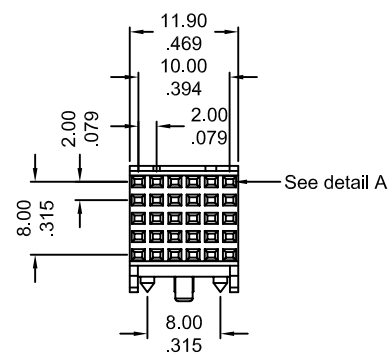


Detail A
(Scale 2:1)

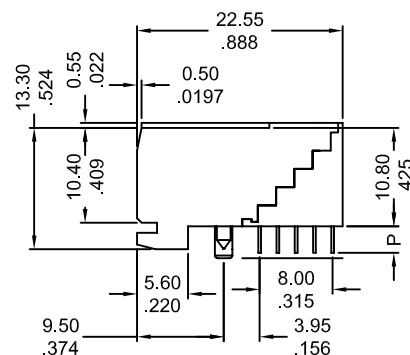


See detail E
See detail F



Detail E
(Scale 2:1)



Detail F
(Scale 2:1)

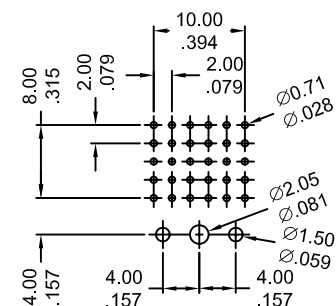

Recommended P.C Board
Hole Layout

Thickness: $\frac{1.60}{.063}$ & $\frac{2.40}{.094}$

UNIT: MM
INCH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FUB-SRxx-5X06-LF
SERIES | LEADFREE
30 WAY
FEMALE | 02:DIP 2.90mm
03:DIP 3.53mm
DIP 90°

DESCRIPTION: .079" (2.00mm) Pitch Female Signal (Futurebus) Header