

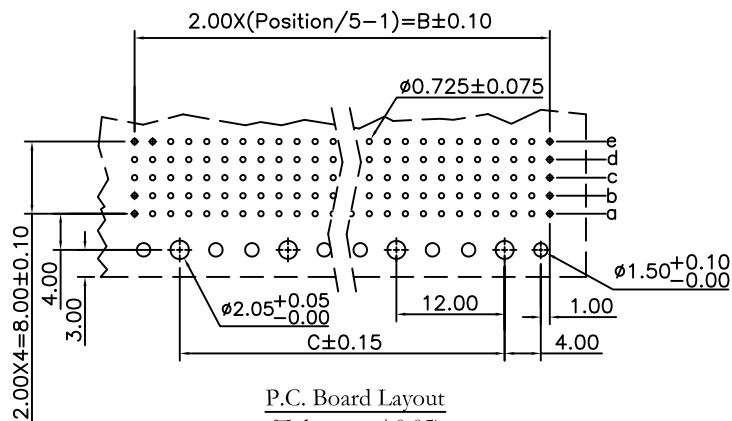
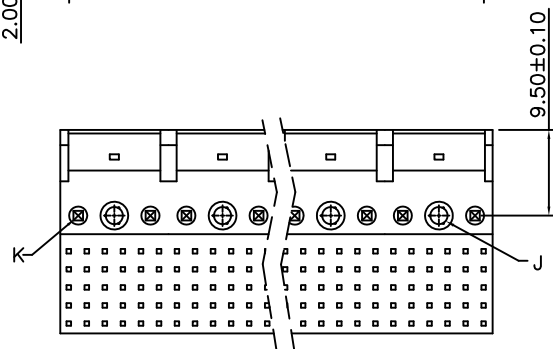
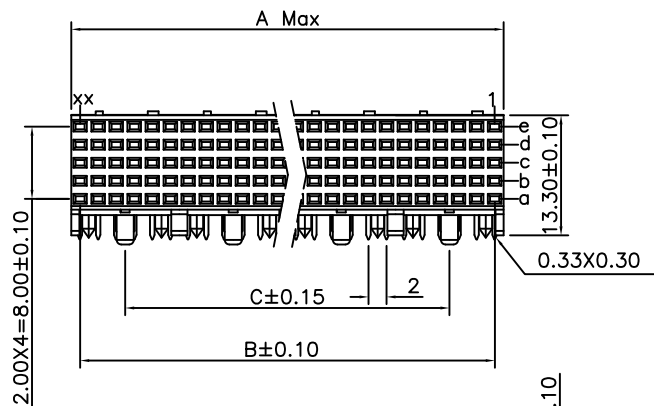


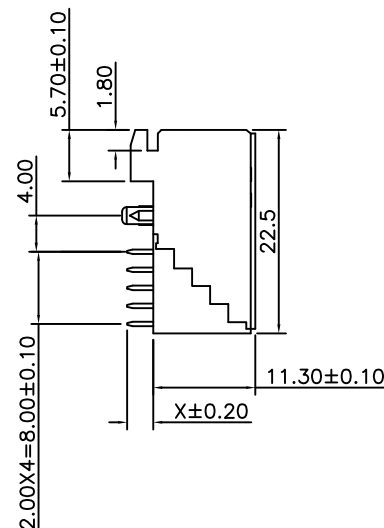

P.C. Board Layout
(Tolerance:±0.05)

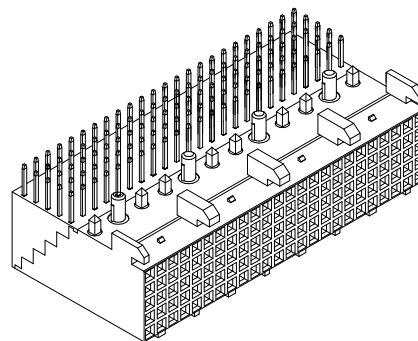


Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C.

*RoHS Compliant

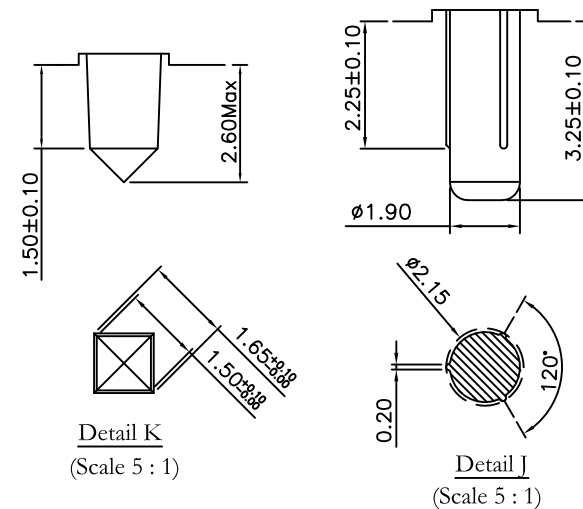

Position	X Length		1	2
	Dimension		2.90	3.53
	A	B	C	
30	11.95	10	0	
60	23.95	22	12	
90	35.95	34	24	
120	47.95	46	36	
150	59.95	58	48	
180	71.95	70	60	
210	83.95	82	72	
240	95.95	94	84	
270	107.95	106	96	
300	119.95	118	108	
330	131.95	130	120	
360	143.95	142	132	
390	155.95	154	144	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ± 0.50
X, ± 0.25
.XX, ± 0.15
.XXX, ±
ANG, ±



ORDER INFORMATION

FUB-SRxx-5Xxx-LF
SERIES LEADFREE
FEMALE 5X06:30WAY
DIP 90° 02:2.90mm
03:3.53mm

DESCRIPTION: