
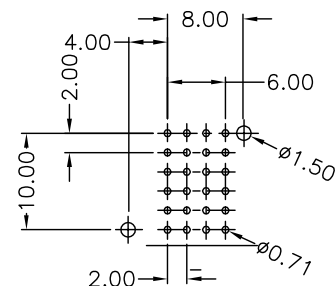


FEATURES:

- 8 Circuits
- Housing: Glass Filled LCP, UL 94V-0
- Contact: Phosphor Bronze
- 8 Circuits modular unit fits into same space and footprint as 24 Circuits signal module
- Sturdy male blade pins avoid bending and dissipate heat
- Post-plated pins provide high reliability
- Code key insertion holes secure code keys and provide proper mating alignment
- PCB retention pegs provide additional hold-down






SPECIFICATIONS:

- Current rating: 3.0A
- Voltage rating: 1000V
- Temperature range: -55°C ~+ 125°C
- Contact resistance: 10mΩ max.
- Insulation resistance: 5000mΩ min.
- Dielectric withstanding voltage: 750V AC

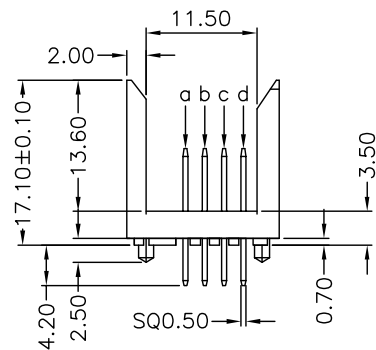

Solder pin

Recommended P.C Board
Hole Layout
Thickness: 1.60 & 2.40

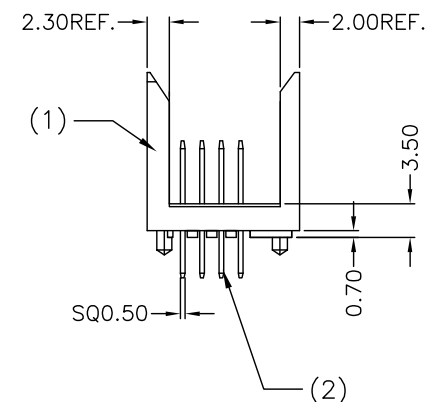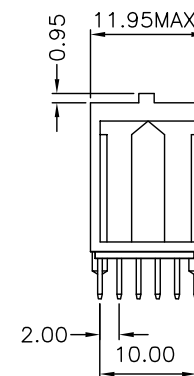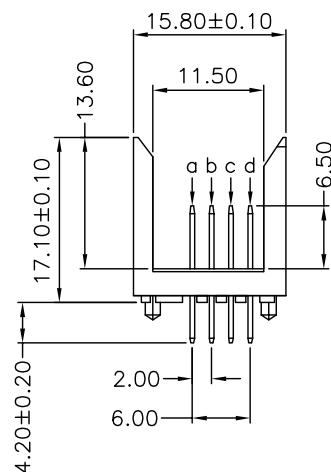

編號	材質	電鍍	數量
(1)	LCP		1
(2)	磷銅 C5191	半金錫	8

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FUP-PD0465-4X02-LF

SERIES
MALE
8 WAY
CONTACT 6.50mm
DIP 4.2mm
DIP 180°

DESCRIPTION: