

Materials:

Housing: High Temperature Plastic UL94V-0.
Contacts: Brass.

Electrical Characteristics:



Current Rating: 3 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.


Operating Temperature: -65°C ~+125°C .

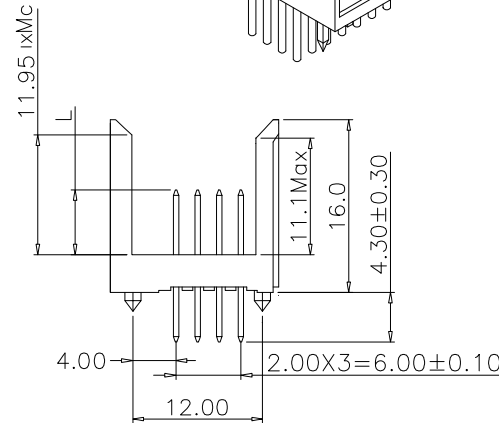

PRESS FIT TYPE



DIP TYPE

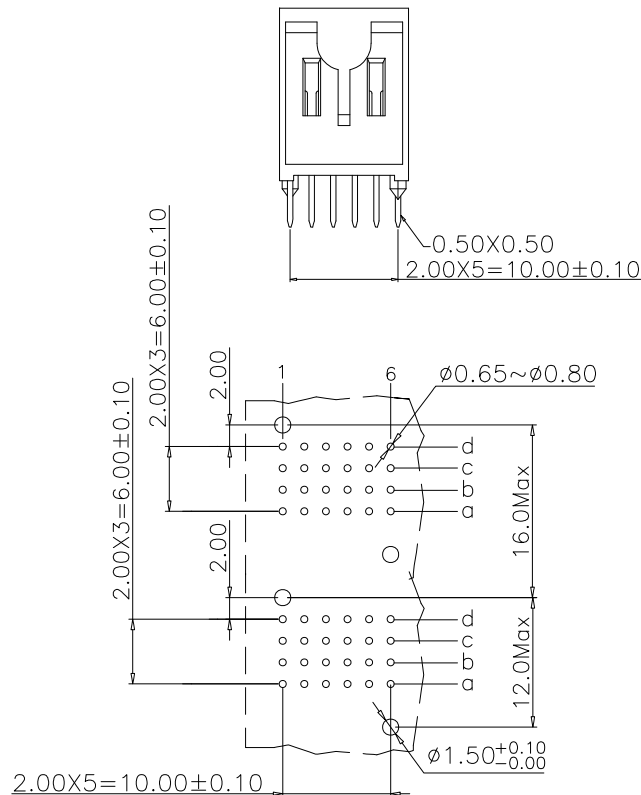

P.C. Board Layout

P/N.	L
FUP-Px0465-4X02	6.5
FUP-Px0472-4X02	7.25
FUP-Px0480-4X02	8.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FUP-Px04xx-4X02-LF

SERIES

LEADFREE

08 WAY

65:6.5mm

72:7.25mm

80:8.0mm

DIP 4.3mm

P: PRESS FIT
D: DIP 180°

DESCRIPTION: