


FEATURES:

- . 10 Circuits
- . Housing: Glass Filled LCP, UL 94V-0
- . Contact: Phosphor Bronze
- . Packaging: Tray
- . 10 Circuits modular unit fits into same space and footprint as 30 Circuits signal module
- . Four point contact design
- . Terminal guide plate ensures true positioning of PC tails
- . Post-plated terminals for high reliability
- . Polarizing key posts and guide walls secure code keys and provide proper mating
- . PCB retention pegs

SPECIFICATIONS:

- . Current rating: 3.0A
- . Voltage rating: 1000V
- . Temperatur range: -55°C ~+ 125°C
- . Contact resistance: 10mΩ max.
- . Insulation resistance: 5000mΩ min.
- . Dielectric withstanding voltage: 750V AC

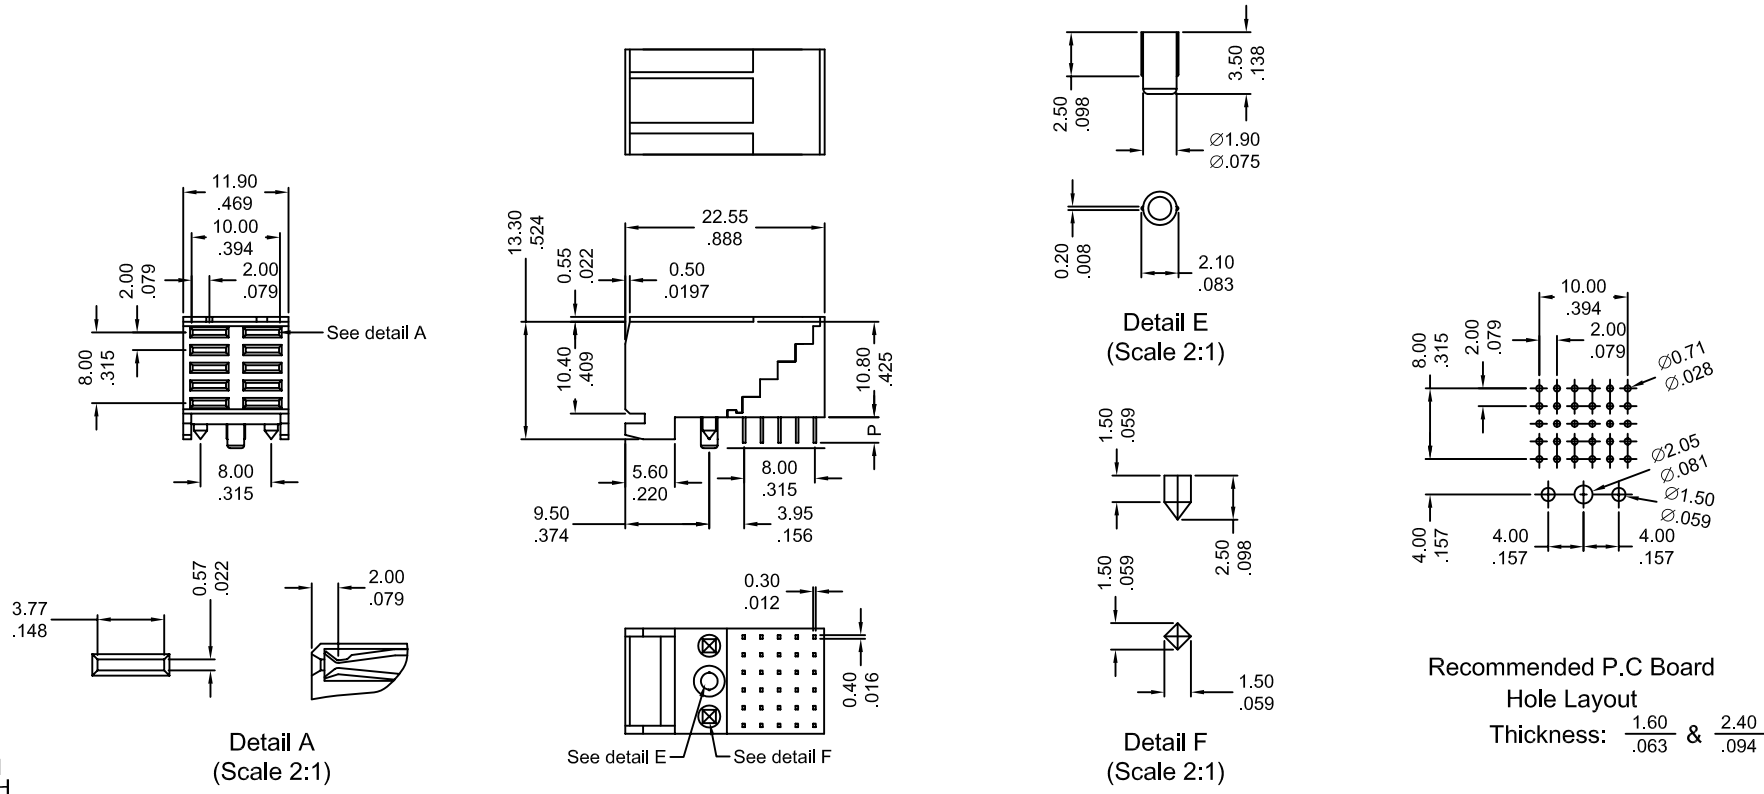

UNIT: MM
INCH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY		X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

FUP-SRxx-5X02-LF		
SERIES	LEADFREE	
	10 WAY	
FEMALE	02:DIP 2.9mm	
	03:DIP 3.53mm	
	DIP 90°	

DESCRIPTION: .079" (2.00mm) Pitch Female Power (Futurebus) Header