

NOTES:

1.MATERIAL:





HOUSING:HIGH TEMP THERMO PLASTIC

TERMINAL:COPPER ALLOY

2.PLATING PER Morethanall PLATING CODE

3.COPLANARITY 0.1 MM MAX. BASE ON DATUM A

4.TRUE POSITION 0.1 MM MAX. BASE ON DATUM B

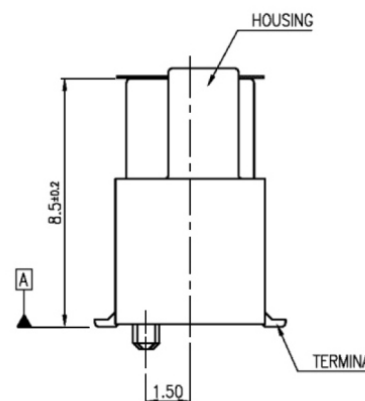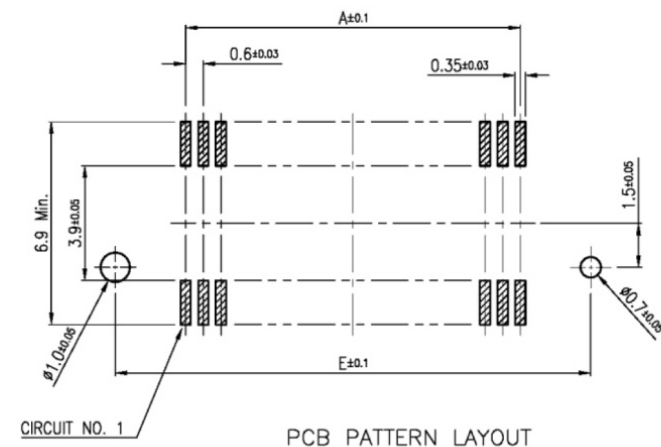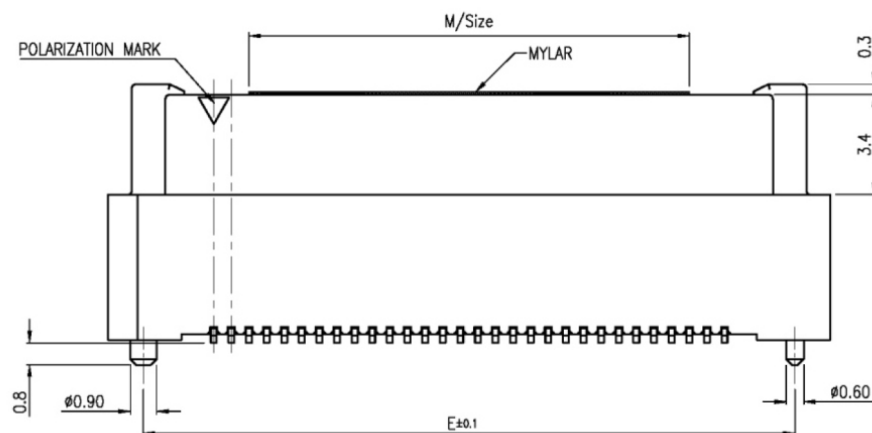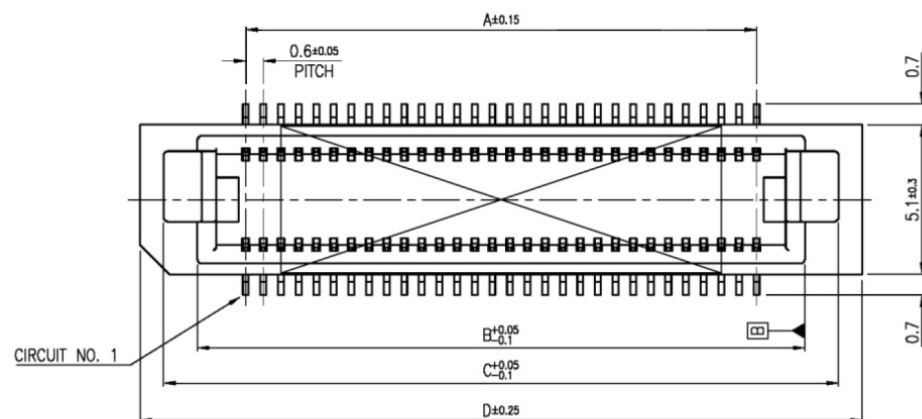

Part No.	CKT	Dim A	Dim B	Dim C	Dim D	Dim E
FX8-P51PC-020	20	5.4	8.7	11.0	12.6	10.2
FX8-P51PC-030	30	8.4	11.7	14.0	15.6	13.2
FX8-P51PC-060	60	17.4	20.7	23.0	24.6	22.2
FX8-P51PC-080	80	23.4	26.7	29.0	30.6	28.2
FX8-P51PC-090	90	26.4	29.7	32.0	33.6	31.2
FX8-P51PC-100	100	29.4	32.7	35.0	36.6	34.2
FX8-P51PC-120	120	35.4	38.7	41.0	42.6	40.2
FX8-P51PC-140	140	41.4	44.7	47.0	48.6	46.2
FX8-P51PC-160	160	47.4	50.7	53.0	54.6	52.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FX8-P51PC-xxx-LF
SERIES | CAP POST | UNMATED HIGH 5.1mm
LEADFREE
020~160WAY

DESCRIPTION: