



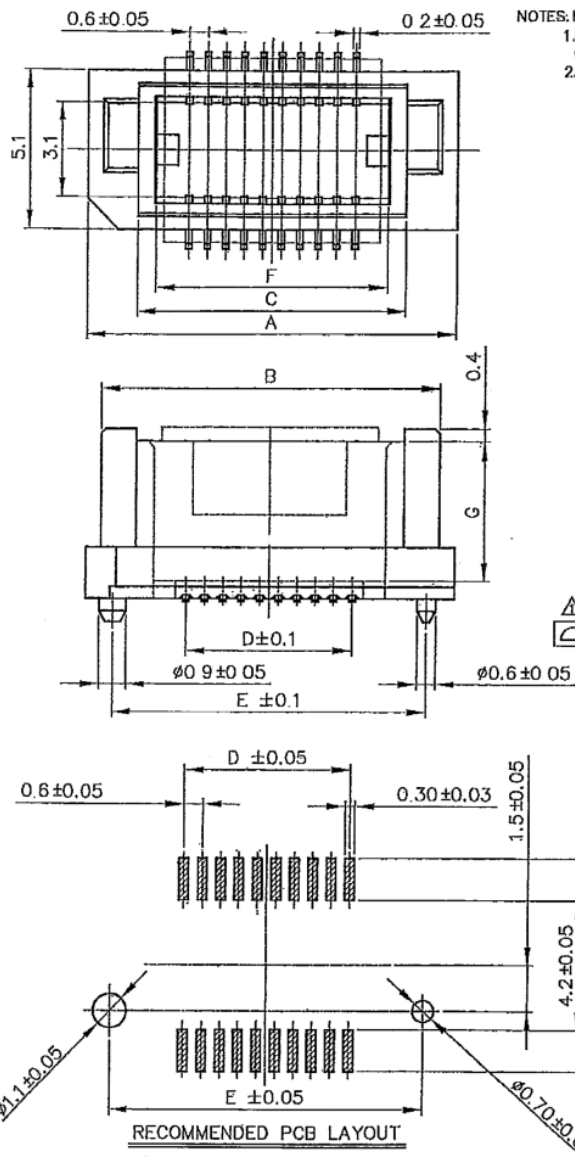

NOTES: MATERIAL & FINISH
1.INSULATOR:HIGH-TEMP THERMOPLASTIC, UL94V-0
COLOR: NATURE
2.CONTACT: COPPER ALLOY
PLATING: GOLD FLASH OR SOLDER AREA TIN(LEAD FREE)
CONTACT AREA GOLD FLASH
OVERALL NICKEL UNDER PLATED

PIN	A	B	C	D	E	F	PIN	A	B	C	D	E	F
68	26.4	25.4	23.1	19.8	24.6	21.9	10	9.0	8.0	5.7	2.4	7.2	4.5
70	27.0	26.0	23.7	20.4	25.2	22.5	12	9.6	8.6	6.3	3.0	7.8	5.1
72	27.6	26.6	24.3	21.0	25.8	23.1	14	10.2	9.2	6.9	3.6	8.4	5.7
74	28.2	27.2	24.9	21.6	26.4	23.7	16	10.8	9.8	7.5	4.2	9.0	6.3
76	28.8	27.8	25.5	22.2	27.0	24.3	18	11.4	10.4	8.1	4.8	9.6	6.9
78	29.4	28.4	26.1	22.8	27.6	24.9	20	12.0	11.0	8.7	5.4	10.2	7.5
80	30.0	29.0	26.7	23.4	28.2	25.5	22	12.6	11.6	9.3	6.0	10.8	8.1
82	30.6	29.6	27.3	24.0	28.8	26.1	24	13.2	12.2	9.9	6.6	11.4	8.7
84	31.2	30.2	27.9	24.6	29.4	26.7	26	13.8	12.8	10.5	7.2	12.0	9.3
86	31.8	30.8	28.5	25.2	30.0	27.3	28	14.4	13.4	11.1	7.8	12.6	9.9
88	32.4	31.4	29.1	25.8	30.6	27.9	30	15.0	14.0	11.7	8.4	13.2	10.5
90	33.0	32.0	29.7	26.4	31.2	28.5	32	15.6	14.6	12.3	9.0	13.8	11.1
92	33.6	32.6	30.3	27.0	31.8	29.1	34	16.2	15.2	12.9	9.6	14.4	11.7
94	34.2	33.2	30.9	27.6	32.4	29.7	36	16.8	15.8	13.5	10.2	15.0	12.3
96	34.8	33.8	31.5	28.2	33.0	30.3	38	17.4	16.4	14.1	10.8	15.6	12.9
98	35.4	34.4	32.1	28.8	33.6	30.9	40	18.0	17.0	14.7	11.4	16.2	13.5
A0	36.0	35.0	32.7	29.4	34.2	31.5	42	18.6	17.6	15.3	12.0	16.8	14.1
C0	42.0	41.0	38.7	35.4	40.2	37.5	44	19.2	18.2	15.9	12.6	17.4	14.7
E0	48.0	47.0	44.7	41.4	46.2	43.5	46	19.8	18.8	16.5	13.2	18.0	15.3

M/H	TYPE	G	H	J
3.0,3.5	01	1.7	0.75	1.7
4.0,4.5	02	2.7	1.75	
5.0,5.5				
10.0,10.5	03		1.05	
6.0,6.5				
11.0,11.5	04		2.05	
7.0,7.5				
12.0,12.5	05		3.05	
8.0,8.5		3.4	4.05	3.4
13.0,13.5	06			
9.0,9.5	07		5.05	
14.0,14.5				
15.0,15.5	08		6.05	
16.0,16.5	09		7.05	

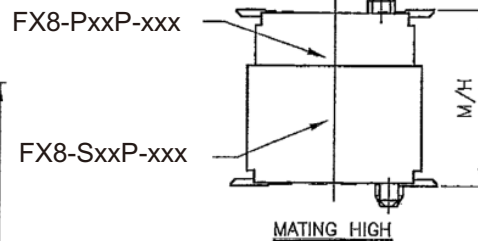

FX8-PxxPC-xxx-LF
LEADFREE
08:0.75mm
18:1.75mm
11:1.05mm
21:2.05mm
31:3.09mm
41:4.05mm
51:5.05mm
61:6.05mm
71:7.05mm
010:10way
130:130way

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FX8-PxxPC-xxx

DWG NO. FX8-PxxPC-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司