
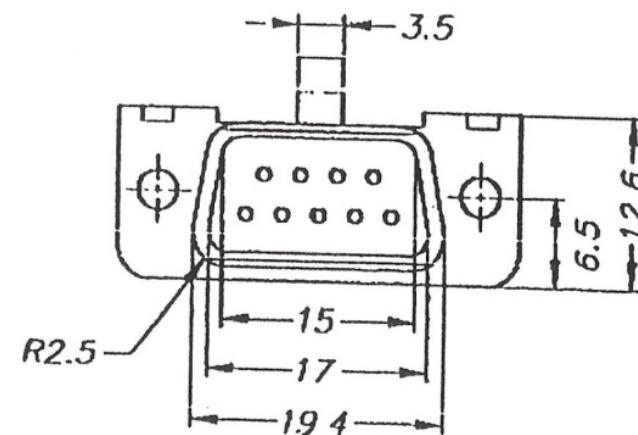
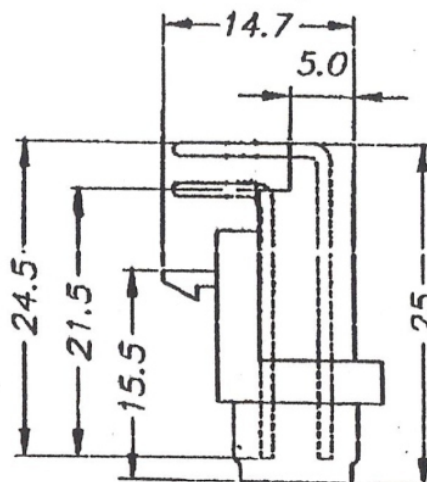
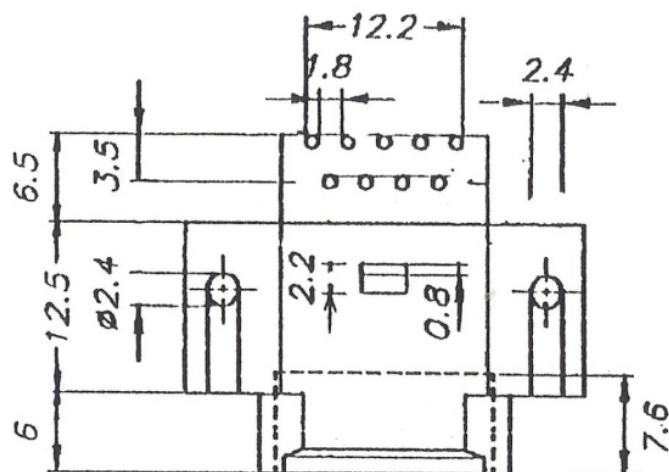


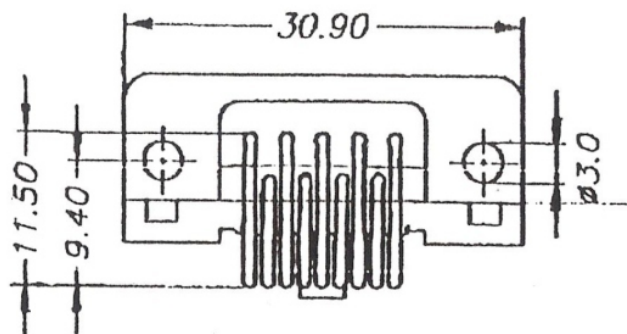

Electrical Characteristics

Contact Current Rating : 5 Amperes

Contact Resistance : 15mOhm Max.

Insulation Resistance : 1000MOhm Min. at 500V DC

Operating Temperature: -55 ° C ~ +105 ° C

Dielectric Withstanding Voltage : 1000V AC for 1 Minute

Materials:

Insulator : Nylon 66, UL 94V-0

Contacts : Phosphor Bronze or Brass

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

GD-PRL-09-LF
SERIES L TYPE
DIP 90°
MALE
LEADFREE
09 WAY

DESCRIPTION: D-SUB 9P全塑