

**MATERIAL**

INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),  
UL94V-0 RATED.

CONTACT: COPPER ALLOY

PLATING: MATING AREA- G/F GOLD OVER NICKEL.  
SOLDER AREA- TIN OVER NICKEL.

**ELECTRICAL**

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.

CONTACT RESISTANCE: 20 MILLI OHMS MAX.

**MECHANICAL**

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR

**ENVIRONMENTAL**

TEMPERATURE RANGE: -40° TO +85°.

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

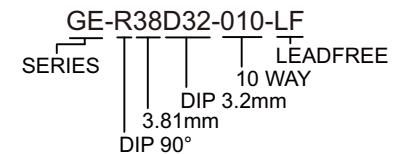

DESCRIPTION: CARD EDGE SLOT, 2.54mm PITCH R/A

煜倫股份有限公司

www.morethanall.com