
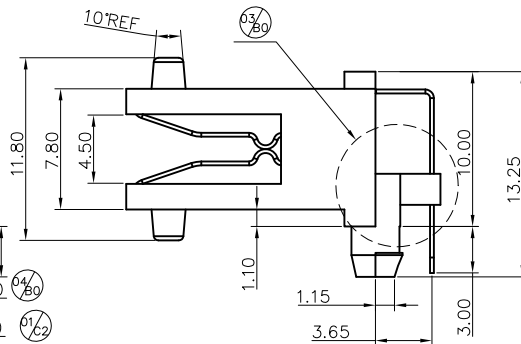
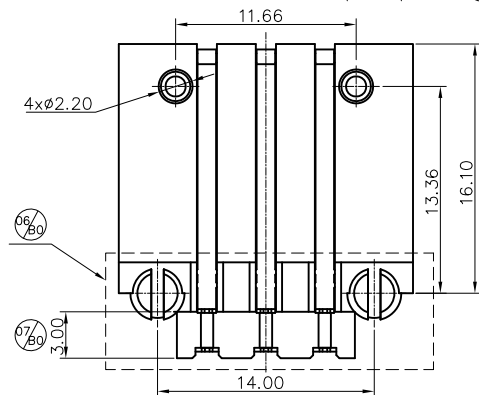
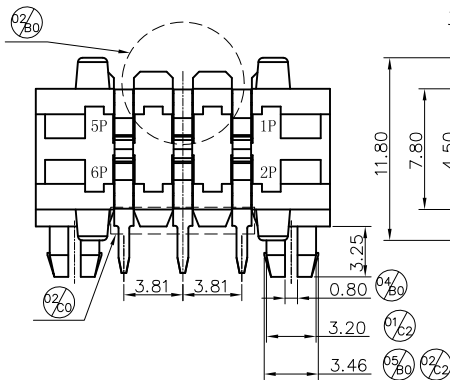
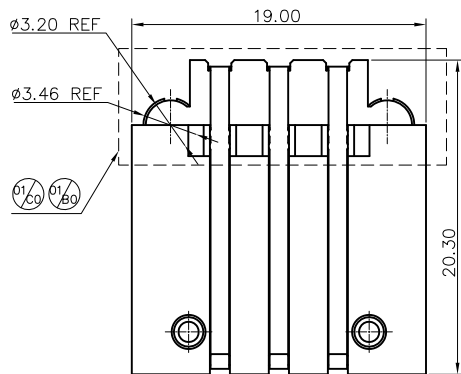


- NOTES:
- 1.MATERIAL:
    - 1.1 INSULATOR: NYLON 9T+30%G.F, UL94V-0; COLOR: BEIGE.
    - 1.2 CONTACT: PHOSPHOR BRONZE, T: 0.25mm.
  - 2.FINISH:
    - 2.1 CONTACT: GOLD FLASH PLATED ON CONTACT AREA 120μ" MIN. TIN PLATED ON SOLDER AREA 50μ" MIN. NICKEL UNDERPLATED OVERALL.
  - 3.SPECIFICATION:
    - 3.1 CURRENT RATING: 3.0 A.
    - 3.2 VOLTAGE RATING: DC 250V.
    - 3.3 CONTACT RESISTANCE: 30mΩ MAX.
    - 3.4 INSULATION RESISTANCE: 1000MΩ MIN DC 500V.
    - 3.5 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
    - 3.6 OPERATING: 1500 CYCLES MIN.
    - 3.7 OPERATING TEMPERATURE: -40°C ~ +105°C.
  - 4.OTHERS:
    - 4.1 THIS COMPONENT AND ITS HOMOGENEOUS SUB COMPONENTS ARE RoHS COMPLIANT.
    - 4.2 RESISTANCE TO SOLDERING HEAT: 265°C FOR 10 SECONDS.

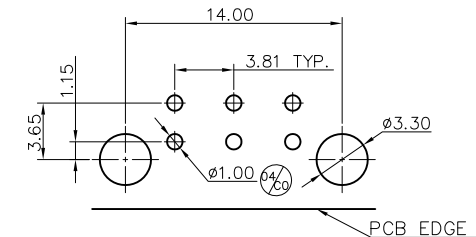

RECOMMENDED PCB LAYOUT(PCB THICKNESS: 1.6mm)  
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
X ± 0.30  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

GJ-RP-06-LF  
SERIES LEADFREE  
06 WAY  
POST  
DIP 90°

DESCRIPTION: PHONE ADAPTER(TAE JACK) R/A DIP TYPE