

Recommended P.C.B Layout

**MATERIAL**

PIN HEADER Contact Pin : Brass

MINI JUMPER Contact Pin : Phosphor Bronze

**SPECIFICATION**

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±0.30

UNIT / mm

SCALE 1:1

.XX±0.20


DATE

.XXX±

ANG±

照片框

**ORDER INFORMATION**

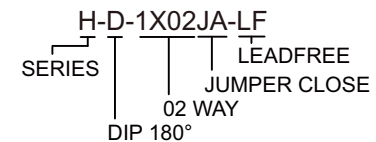

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

SIZE A4

PPOJECTION

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT TYPE, SINGLE ROW +MINI JUMPER