

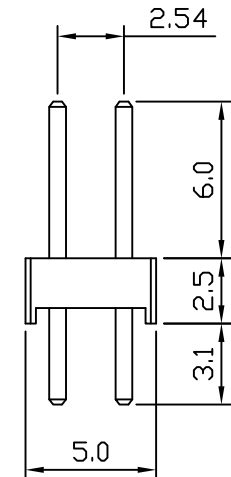
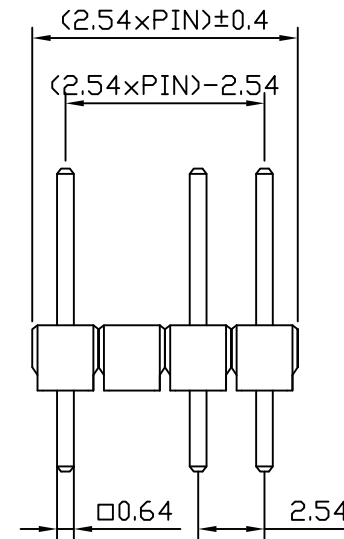


MATERIALS

1. CONTACT: BRASS
2. INSULATOR: PBT (UL 94V-0), COLOR: BLACK.
3. CONTACT PLATING: GOLD FLASH OVER NICKEL.

SPECIFICATION

1. INSULATOR RESISTANCE: 5000M ohms Min
2. CURRENT RATING: 3 Amps
3. DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
4. OPERATING TEMPERATURE: -45°C TO +105°C

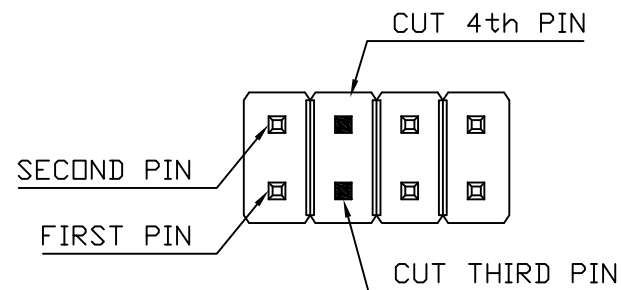

P.C.B. LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

ORDER INFORMATION

H-D-2X04E34-LF
SERIES
08 WAY
DIP 180°
LEADFREE
EMPTY #3.4 PIN

DESCRIPTION: